


Morro Bay Indirect Potable Reuse (IPR) Project

- Water Reclamation Facility
 - 0.97 mgd facility
 - First Full Advanced Treatment facility incorporating MBR in California
- Lift Stations and Pipelines (Conveyance Facilities)
- IPR Facilities
 - 4 Injection Wells & Conveyance Pipelines
 - Construction Start: November 2023
 - Anticipated Completion: April 2025

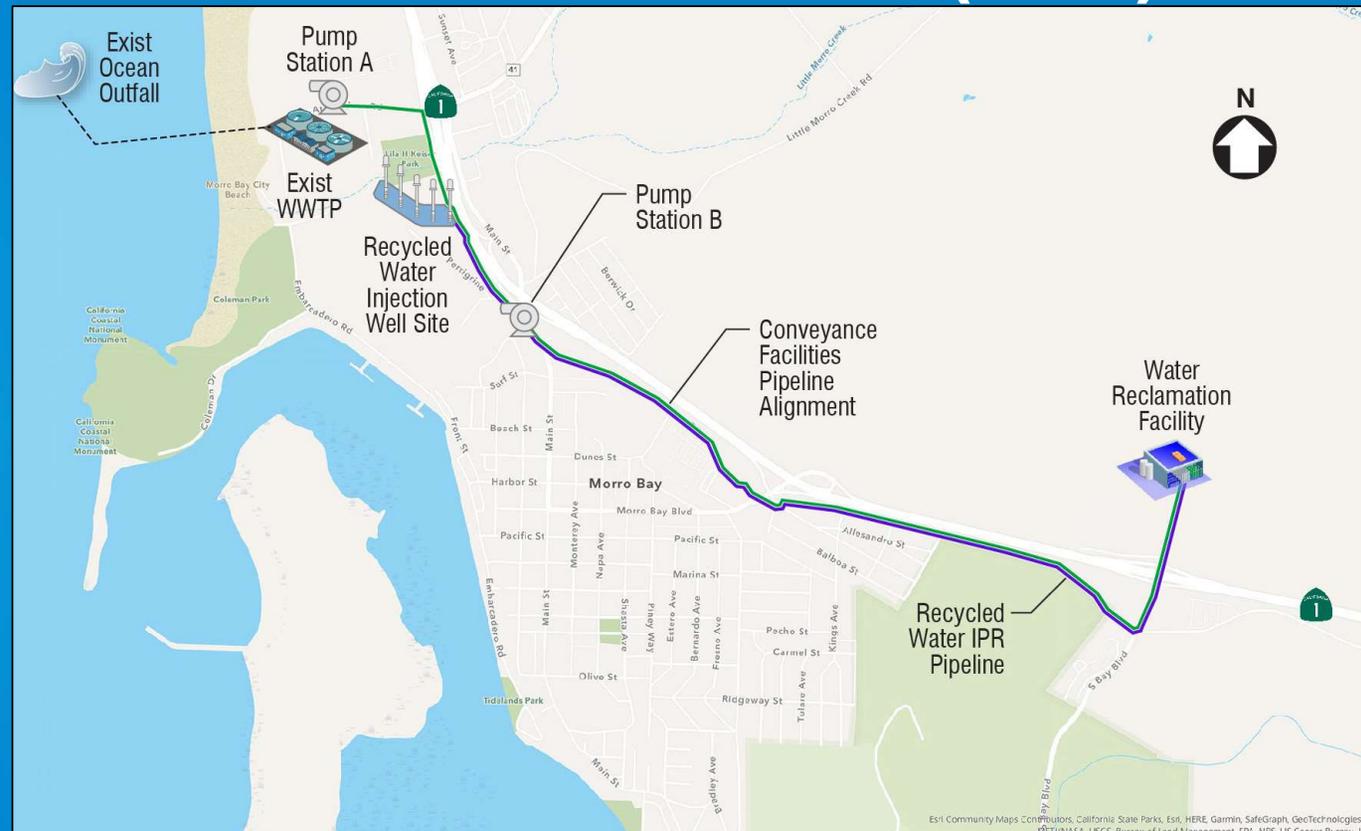

Morro Bay Indirect Potable Reuse (IPR) Project

- Creates a new, sustainable water supply
- Provides up to 825 AFY of Advanced Purified Water for injection into the Morro Basin
- Enhanced recharge protects against seawater intrusion, improves water quality and increases supply available
 - Reduces TDS and Nitrate concentrations
- Local, drought resistant and resilient source of supply
 - Meets up to 80% of City's water demand (approximately 900 AFY)
- Reduces City's reliance on imported Sacramento/San Joaquin Delta SWP Supplies
- Makes available 500 – 1,000 AFY of SWP for regional water supply reliability and resiliency