

**Groundwater Sustainability Commission**  
*for the San Luis Obispo Valley Groundwater Basin*

**NOTICE OF MEETING**

**NOTICE IS HEREBY GIVEN** that the Groundwater Sustainability Commission will hold a **Special Meeting** at **3:30 P.M. on Wednesday, July 8, 2020**. Based on the threat of COVID-19 as reflected in the Proclamations of Emergency issued by both the Governor of the State of California and the San Luis Obispo County Emergency Services Director, as well as the Governor's Executive Order N-29-20 issued on March 17, 2020 relating to the convening of public meetings in response to the COVID-19 pandemic, this meeting will be conducted as a phone-in/web-based meeting only. There will be no physical meeting location for this GSC Meeting. Members of the public can participate via phone or by logging into the web-based meeting.

**TO JOIN THE MEETING FROM YOUR COMPUTER, TABLET OR SMARTPHONE, GO TO:**

<https://global.gotomeeting.com/join/502900501>

(This link will help connect both your browser and telephone to the call)

**YOU CAN ALSO DIAL IN USING YOUR PHONE:**

United States: +1 (571) 317-3112

Access Code: 502-900-501

**All persons desiring to speak during any Public Comment can submit a comment by:**

- Email at [dtzou@co.slo.ca.us](mailto:dtzou@co.slo.ca.us) by 5:00 PM on the day prior to the Commission meeting
- Teleconference meeting at <https://global.gotomeeting.com/join/502900501>
- Teleconference by phone at +1 (571) 317-3112 and enter 502-900-501
- Mail by 5:00 PM on the day prior to the Commission meeting to:  
County of San Luis Obispo Department of Public Works  
Attn: Dick Tzou  
County Government Center, Room 206  
San Luis Obispo, CA 93408
- Additional information on how to submit Public Comment is provided on page 3 of this Agenda

*NOTE: The Groundwater Sustainability Commission reserves the right to limit each speaker to three (3) minutes per subject or topic. In compliance with the Americans with Disabilities Act and Executive Order N-29-20, all possible accommodations will be made for individuals with disabilities, so they may participate in the meeting. Persons who require accommodation for any audio, visual or other disability in order to participate in the meeting of the GSC are encouraged to request such accommodation 48 hours in advance of the meeting from Joey Steil at (805) 781-5252.*

**GROUNDWATER SUSTAINABILITY COMMISSION AGENDA**

**Adam Hill**, Member, County of San Luis Obispo  
**Bob Schiebelhut**, Chair, EVGMWC  
**Dennis Fernandez**, Member, ERMWC/VRMWC  
**Mark Zimmer**, Vice Chair, GSWC  
**Andy Pease**, Member, City of San Luis Obispo

**Bruce Gibson**, Alternate, County of San Luis Obispo  
**George Donati**, Alternate, EVGMWC  
**James Lokey**, Alternate, ERMWC/VRMWC  
**Toby Moore**, Alternate, GSWC  
**Aaron Floyd**, Alternate, City of San Luis Obispo

- 
1. **Call to Order** (Chair)
  2. **Roll Call** (City Staff: Mychal Boerman)
  3. **Pledge of Allegiance** (Chair)
  4. **Public Comment – Items not on Agenda** (Chair)

**5. Approval of Meeting Minutes (Chair)**

- a) March 11, 2020

**6. Project Status Updates (City and County Staff: Mychal Boerman and Dick Tzou)**

- a) Overview of Governance/Quarterly Progress on Stakeholder Engagement
- b) Project Activity Updates
  - i. Comments on Draft Chapter 5: Groundwater Conditions (closed May 31, 2020) and Draft Surface Water/Groundwater Modeling Approach Technical Memorandum (closed June 15, 2020)
  - ii. Well data consent forms
  - iii. DWR consultation meeting

**7. Draft GSP Chapter 6: Water Budget for Review and Comment (WSC Consultant Team: Spencer Harris)**

Recommendation

- a) The GSC considers recommending Draft GSP Chapter 6: Water Budget to be received and filed by the GSAs and released for public comment.

**8. Stakeholder Workshop Perceptions Summary: Vision for a Sustainable SLO Basin (WSC Consultant Team: Tiffany Meyer and Michael Cruikshank)**

Recommendation

- a) Receive a presentation on the takeaways from Stakeholder Workshop #2: Groundwater Management Vision and provide direction as necessary regarding development of a set of draft “guiding principles” for the SLO Basin GSP.

**9. A Preview of What’s Next? (WSC Consultant Team: Michael Cruikshank and Tiffany Meyer)**

Recommendation

- a) Receive a preview of upcoming SGMA activities and provide direction as necessary.
  - i. Stakeholder Workshop #3: Sustainable Goal Setting — August 5, 2020
  - ii. Quarterly Newsletter Update Vol. 4 — August 2020

**10. Future Items (Chair)**

- a) Sustainable Management Criteria
- b) Draft Surface Water/Groundwater Modeling Calibration Technical Memorandum
- c) Data Management Plan Technical Memorandum

**11. Next Regular Meeting: September 9, 2020**

**12. Adjourn (Chair)**

**Groundwater Sustainability Commission**  
*for the San Luis Obispo Valley Groundwater Basin*

**NOTICE OF MEETING**

**\*\*\*CONFERENCE CALL/WEBINAR ONLY\*\*\***

Wednesday, July 8, 2020 at 3:30 p.m.

**Important Notice Regarding COVID-19 Based on guidance from the California Department of Public Health and the California Governor's Officer, in order to minimize the spread of the COVID-19 virus, please note the following:**

1. The meeting will only be held telephonically and via internet via the number and website link information provided on the agenda. After each item is presented, Commission Members will have the opportunity to ask questions. Participants on the phone will then be provided an opportunity to speak for 3 minutes as public comment prior to Commission deliberations and/or actions or moving on to the next item. The chat function on the webinar may also be used to submit comments and ask questions and will be verbalized by staff during the public comment period for each item. How to use the chat function will be demonstrated at the beginning of the meeting.
2. The Commission's agenda and staff reports are available at the following website:  
<https://www.slowaterbasin.com>
3. If you choose not to participate in the meeting and wish to make a written comment on any matter within the Commission's subject matter jurisdiction, regardless of whether it is on the agenda for the Commission's consideration or action, please submit your comment via email or U.S. Mail by 5:00 p.m. on the Tuesday prior to the Committee meeting. Please submit your comment to Dick Tzou at dtzou@co.slo.ca.us. Your comment will be placed into the administrative record of the meeting.

Mailing Address:

County of San Luis Obispo Department of Public Works

Attn: Dick Tzou

County Government Center, Room 206

San Luis Obispo, CA 93408

4. If you choose not to participate in the meeting and wish to submit verbal comment, please call (805) 781-5252 and ask for Dick Tzou. If leaving a message, state and spell your name, mention the agenda item number you are calling about and leave your comment. The verbal comments must be received by no later than 9:00 a.m. on the morning of the noticed meeting and will be limited to 3 minutes. Every effort will be made to include your comment into the record, but some comments may not be included due to time limitations.

*NOTE: The Groundwater Sustainability Commission reserves the right to limit each speaker to three (3) minutes per subject or topic. In compliance with the Americans with Disabilities Act and Executive Order N-29-20, all possible accommodations will be made for individuals with disabilities, so they may participate in the meeting. Persons who require accommodation for any audio, visual or other disability in order to participate in the meeting of the GSC are encouraged to request such accommodation 48 hours in advance of the meeting from Joey Steil at (805) 781-5252.*

**Groundwater Sustainability Commission  
Regular Meeting Minutes (DRAFT)  
March 11, 2020**

The following members or alternates were present:

- Bob Schiebelhut**, Chair, EVGMWC
- Mark Zimmer**, Vice Chair, GSWC
- Dennis Fernandez**, Member, ERMWC/VRMWC
- Andy Pease**, Member, City of San Luis Obispo

<b>1. Call to Order</b>	Chair Schiebelhut: calls the meeting to order at 3:35 PM.																									
<b>2. Roll Call</b>	City Staff, Mychal Boerman: calls roll.																									
<b>3. Pledge of Allegiance</b>	Chair Schiebelhut: leads the Pledge of Allegiance.																									
<b>4. Public Comment – Items not on Agenda</b>	Chair Schiebelhut: opens the floor for public comment.  <i>-There is none-</i>																									
<b>5. Approval of Meeting Minutes</b>  a) December 11, 2019	<p>Chair Schiebelhut: opens discussion for Agenda Item 5 - Approval of Meeting Minutes for the December 11, 2019 Groundwater Sustainability Commission Meeting and asks for comments from the Commission; there is none.</p> <p><b>Motion By: Member Fernandez</b>  <b>Second By: Member Pease</b>  <b>Motion:</b> The Commission moves to approve the December 11, 2019 Meeting Minutes.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Members</th> <th style="text-align: center;">Ayes</th> <th style="text-align: center;">Noes</th> <th style="text-align: center;">Abstain</th> <th style="text-align: center;">Recuse</th> </tr> </thead> <tbody> <tr> <td>Bob Schiebelhut (Chair)</td> <td style="text-align: center;">X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Mark Zimmer (Vice Chair)</td> <td style="text-align: center;">X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Andy Pease (Member)</td> <td style="text-align: center;">X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Dennis Fernandez (Member)</td> <td style="text-align: center;">X</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Members	Ayes	Noes	Abstain	Recuse	Bob Schiebelhut (Chair)	X				Mark Zimmer (Vice Chair)	X				Andy Pease (Member)	X				Dennis Fernandez (Member)	X			
Members	Ayes	Noes	Abstain	Recuse																						
Bob Schiebelhut (Chair)	X																									
Mark Zimmer (Vice Chair)	X																									
Andy Pease (Member)	X																									
Dennis Fernandez (Member)	X																									
<b>6. Project Status Updates</b>	<p>City Staff, Mychal Boerman and County Staff, Dick Tzou: present a project status update including an overview of the basin’s governance and quarterly progress on stakeholder engagement.</p> <p><i>Meeting materials and audio for this item can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/resources">https://www.slowaterbasin.com/resources</a></p> <p><u>Discussion Summary</u></p> <ul style="list-style-type: none"> <li>• Quarterly Newsletter Vol. 3 has been made available to the public.</li> <li>• The public comment period for GSP Draft Chapters 3 and 4 closed January 31, 2020.</li> <li>• GSP Draft Chapter 5 is now available for public review. The public comment period will remain open until April 30<sup>th</sup>.</li> </ul>																									

**Groundwater Sustainability Commission**  
**Regular Meeting Minutes (DRAFT)**  
**March 11, 2020**

	<p>Chair Schiebelhut and Member Zimmer: asks County staff for clarification on responding to published public comments, even after the public comment period has ended on a particular Draft Chapter.</p> <p>County Staff, Dick Tzou: responds that the public comment period for Draft Chapters is generally 45 days; however, submitted written comments will still be accepted at any point throughout the GSP development process.</p> <p>Chair Schiebelhut: opens the floor for public comment; there is none.</p>																									
<p><b>7. Draft GSP Chapters 5 for Review and Comment</b></p>	<p>WSC consultant, David O'Rourke: presents an overview of GSP Draft Chapter 5, including SGMA and GSP governance timelines and how the public can submit comments on GSP Draft Chapter 5 by visiting the SLOWaterBasin.com portal during the comment period.</p> <p><i>Meeting materials and audio for this item can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/resources">https://www.slowaterbasin.com/resources</a></p> <p><i>The below Draft Chapters can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/review-documents">https://www.slowaterbasin.com/review-documents</a></p> <ul style="list-style-type: none"> <li>• GSP Draft Chapter 5- Groundwater Conditions</li> </ul> <p><u>Discussion Summary</u></p> <p>Commission members and the consultant team address the current and historical groundwater conditions in the SLO Basin.</p> <ul style="list-style-type: none"> <li>• The public comment period for GSP Draft Chapter 5 opens March 12, 2020 and Closes April 30, 2020.</li> </ul> <p><b>Motion By: Chair Schiebelhut</b>  <b>Second By: Member Pease</b>  <b>Motion:</b> The Commission recommends that each GSA receive and file GSP Draft Chapter 5 as presented.</p> <table border="1" data-bbox="535 1430 1495 1619"> <thead> <tr> <th>Members</th> <th>Ayes</th> <th>Noes</th> <th>Abstain</th> <th>Recuse</th> </tr> </thead> <tbody> <tr> <td>Bob Schiebelhut (Chair)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Mark Zimmer (Vice Chair)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Andy Pease (Member)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Dennis Fernandez (Member)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Members	Ayes	Noes	Abstain	Recuse	Bob Schiebelhut (Chair)	X				Mark Zimmer (Vice Chair)	X				Andy Pease (Member)	X				Dennis Fernandez (Member)	X			
Members	Ayes	Noes	Abstain	Recuse																						
Bob Schiebelhut (Chair)	X																									
Mark Zimmer (Vice Chair)	X																									
Andy Pease (Member)	X																									
Dennis Fernandez (Member)	X																									
<p><b>8. An Overview on Sustainable Management Criteria</b></p>	<p>WSC Consultants, David O'Rourke and Michael Cruikshank: present an overview of Sustainable Management Criteria and how the public can help define sustainability goals for the SLO Basin.</p> <p><i>Meeting materials and audio for this item can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/resources">https://www.slowaterbasin.com/resources</a></p>																									

**Groundwater Sustainability Commission**  
**Regular Meeting Minutes (DRAFT)**  
**March 11, 2020**

<p><b>9. Integrated Groundwater/Surface Water (GW/SW) Modeling Update</b></p>	<p>WSC Consultant, David O'Rourke: provides an update on the progress and development of the integrated groundwater/surface water model for the SLO Basin.</p> <p><i>Meeting materials and audio for this item can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/resources">https://www.slowaterbasin.com/resources</a></p> <p><b>Motion By: Member Pease</b>  <b>Second By: Member Fernandez</b>  <b>Motion:</b> Recommend that each GSA receive and file the Draft GW/SW Technical Memorandum #1.</p> <table border="1" data-bbox="537 642 1495 835"> <thead> <tr> <th>Members</th> <th>Ayes</th> <th>Noes</th> <th>Abstain</th> <th>Recuse</th> </tr> </thead> <tbody> <tr> <td>Bob Schiebelhut (Chair)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Mark Zimmer (Vice Chair)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Andy Pease (Member)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Dennis Fernandez (Member)</td> <td>X</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Members	Ayes	Noes	Abstain	Recuse	Bob Schiebelhut (Chair)	X				Mark Zimmer (Vice Chair)	X				Andy Pease (Member)	X				Dennis Fernandez (Member)	X			
Members	Ayes	Noes	Abstain	Recuse																						
Bob Schiebelhut (Chair)	X																									
Mark Zimmer (Vice Chair)	X																									
Andy Pease (Member)	X																									
Dennis Fernandez (Member)	X																									
<p><b>10. A Preview of What's Next?</b></p>	<p>WSC Consultants, Michael Cruikshank and Tiffany Meyer present on upcoming GSP activities for the SLO Basin:</p> <p><i>Meeting materials and audio for this item can be accessed by visiting:</i>  <a href="https://www.slowaterbasin.com/resources">https://www.slowaterbasin.com/resources</a></p> <p><u>Discussion Summary:</u></p> <ul style="list-style-type: none"> <li>• Chapters 3 and 4 received, filed, and uploaded to <a href="https://www.slowaterbasin.com">slowaterbasin.com</a></li> <li>• Next regular GSC Meeting on June 10, 2020</li> <li>• Sustainable Goal Setting Workshop #2 will take place on Wednesday April 8th, 2020 at 6:00 PM</li> <li>• Upcoming Chapters to Review - Chapter 6 Groundwater Budget</li> <li>• County Monitoring Well Program</li> <li>• Quarterly Newsletter Update Vol. 4 will soon be available April 2020</li> </ul>																									
<p><b>11. Future Items</b></p>	<p>Chair Schiebelhut:</p> <ul style="list-style-type: none"> <li>• Sustainable Goal Setting Workshop #2  Wednesday April 8th, 2020 at 6:00 PM  Ludwick Community Center  864 Santa Rosa St, San Luis Obispo, CA, 93401</li> <li>• Review of Draft Chapter 6 – Water Budget</li> <li>• Data Management System Overview</li> </ul>																									
<p><b>12. Next Regular Meeting</b></p>	<p>Wednesday, June 10, 2020 at 3:30 pm  SLO County/City Library Community Room  995 Palm St, San Luis Obispo, CA 93403</p>																									

**Groundwater Sustainability Commission  
Regular Meeting Minutes (DRAFT)  
March 11, 2020**

<b>13. Adjourn</b>	<b>Motion By: Chair Schiebelhut</b>				
	<b>Second By: Member Pease</b>				
	<b>Motion:</b> The Commission moves to adjourn the meeting at 5:35 PM				
	<b>Members</b>	<b>Ayes</b>	<b>Noes</b>	<b>Abstain</b>	<b>Recuse</b>
	Bob Schiebelhut (Chair)	X			
Mark Zimmer (Vice Chair)	X				
Andy Pease (Member)	X				
Dennis Fernandez (Member)	X				

DRAFTED BY: City Staff, Hayley Sabatini

DRAFT

**GROUNDWATER SUSTAINABILITY COMMISSION**  
*for the San Luis Obispo Valley Groundwater Basin*  
**September 11, 2020**

**Agenda Item 6 – Project Status Update**  
**(Presentation Item)**

**Prepared By**

Mychal Boerman and Dick Tzou, City and County of San Luis Obispo

**Discussion**

The purpose of this item is to provide a status update on the GSP project. A brief overview on the GSA governance structure will be presented. Starting in the March 2020 GSC meeting moving forward, a quarterly progress update on the stakeholder engagement process will be presented following a brief presentation of the GSA governance structure. A set of metrics have been developed by the Consultant Team to quantify the effectiveness of the stakeholder outreach program. The metrics consist of a set of measurable statistics on the various stakeholder engagement efforts such as attendance level of stakeholder participation, project website performance, number of subscribers on the stakeholder list, and extent of stakeholder outreach touch points. The current results to date (June 2020) for the metrics are included in the attached SLO Basin GSP Quarterly Progress Report on pages 3 and 4. Results in June 2020 indicated that there are about 419 subscribers to the email list, which is about 9 percent increase in membership since March 2020. The average GSC meeting attendance is about 30 people and over 75 interested parties attended the public Workshop#2 in June 2020.

The County Board of Supervisors have received and filed the draft GSP Chapter 5 and draft Surface Water/Groundwater Modeling Approach Technical Memorandum (Modeling TM#1) on March 24, 2020. The comment periods for draft GSP Chapter 5 and Modeling TM#1 closed May 31 and June 15, 2020, respectively, and all comments (see attached) received are now published online and may be viewed at: <https://www.slowaterbasin.com/review-documents>. Public or GSA comments received during each draft GSP chapter/section's comment period will be considered when sections are compiled into a complete public draft GSP document, slated for further public review in summer of 2021. However, if there are critical comments by the public or GSC members that needed immediate attention so that the project can continue to progress in the right direction, staff may bring forward these issues to the GSC for resolution and further direction on a case by case basis during the following GSC meeting. During this last quarter, GSA staff have received multiple comments asking that the impact of the out-of-basin Righetti Reservoir diversions on the West Corral de Piedras Creek inflow to the Basin be considered in the water budget analysis. These surface diversions were certainly documented and accounted for in the water budget based on the diversion records received from the State Water Board.

The Project Team met with DWR staff to discuss several technical issues related to the water budget and modeling. DWR's comments and input were helpful in providing further guidance in moving forward with the proposed GSP development approaches.

**Attachments:**

1. Presentation
2. SLO Basin GSP Quarterly Progress Report
4. GSP chapter comments (all)



# GSC QUARTERLY MEETING

For the Development of the SLO Basin  
Groundwater Sustainability Plan (GSP)

March 11, 2020


PREPARED BY WATER SYSTEMS CONSULTING



## PROJECT STATUS UPDATE


Mychal Boerman and Dick Tzou, City  
and County of San Luis Obispo

# GOVERNANCE TIMELINE

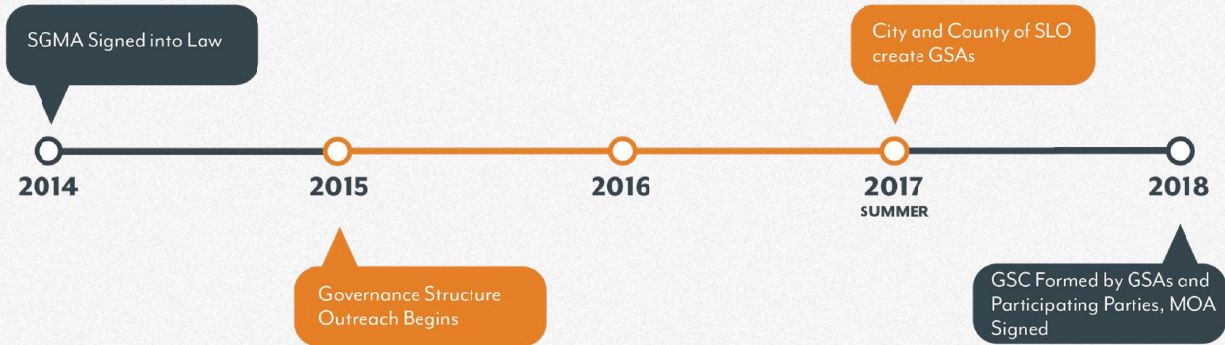

# GSP GOVERNANCE

Groundwater Sustainability Agencies (GSA) | Groundwater Sustainability Commission

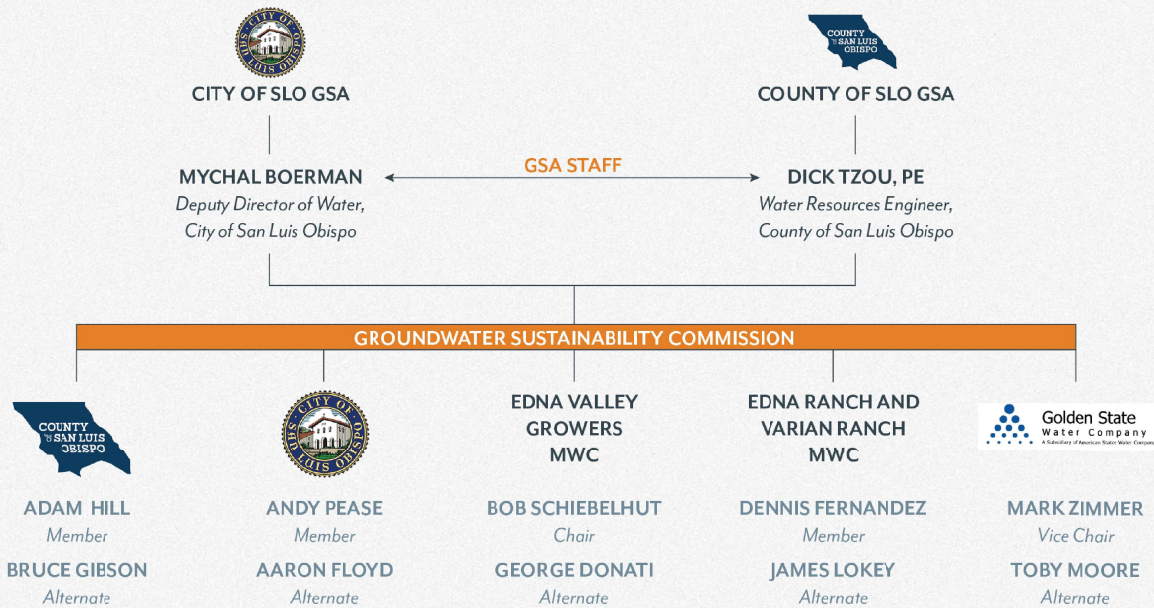




# STAKEHOLDER ENGAGEMENT RESULTS LAST QUARTER

- Create an inclusive, transparent participation experience that builds public trust in the Groundwater Model and GSP and optimizes participation among all those impacted.
- Employ outreach methods that facilitate shared understanding of the importance of sustainable groundwater and its impact on stakeholders.
- Communicate “early and often,” and actively identify and eliminate barriers to participation.
- Develop a cost-effective, stakeholder-informed GSP supported by best-in-class technical data.

## APRIL-JUNE 2020 ENGAGEMENT ACTIVITY AND RESULTS

### STAKEHOLDER OUTREACH TOUCHPOINTS

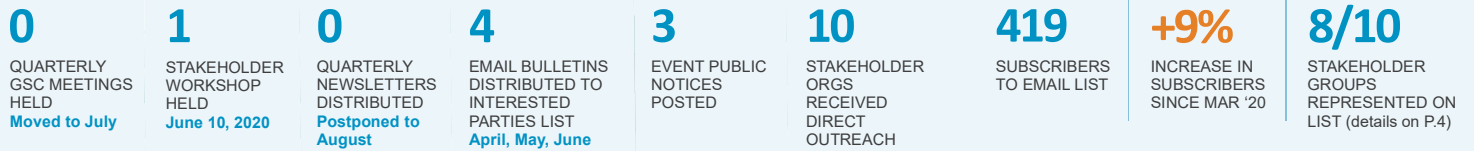


### STAKEHOLDER LIST

### STAKEHOLDER PARTICIPATION



### PROJECT WEBSITE PERFORMANCE APR-JUN '20 — SLOWaterBasin.com



## STAKEHOLDERS / REPRESENTATION AND PARTICIPATION



\* This segment is likely represented on our email list among those who did not self-identify an affiliation, which are listed within the “general public or unknown” category above.  
 \*\* Though there are no Native American lands within the Basin, the County of SLO is in the process of contacting the Chumash people about the GSP development in a formal letter.

---

## PROJECT ACTIVITY UPDATES

- Comments for Draft Chapter 5 and Modeling TM#1
- Well Data Consent Forms
- DWR Consultation Meeting

# SLO BASIN GROUNDWATER SUSTAINABILITY PLAN

San Luis Obispo Valley Basin

## QUARTERLY PROGRESS REPORT

Delivered June 2020



PREPARED BY WATER SYSTEMS CONSULTING

## PROJECT TIMELINE

Step 1.  
Establish  
Governance  
Structure



CHAPTERS 1-2

APR 2019 – OCT 2019

APR 10, 2019 — GSC MTG  
JUN 12, 2019 — GSC MTG

JUL 15, 2019 — PUBLIC  
COMMENT, C&E PLAN

AUG 24, 2019 — SH  
WORKSHOP #1, GW AND  
SMG 101

SEP 11, 2019 — GSC MTG

SEP 11, 2019 — PUBLIC  
COMMENT CHAPTER 1-2:  
ADMIN INFO

Step 2.  
Document  
Basin Setting



CHAPTERS 3-6

OCT 2019 – JUL 2020

- DEC 11, 2019 — GSC MTG
- DEC 11, 2019 — PUBLIC COMMENT  
CHAPTER 3-4: BASIN SETTING
- MAR 11, 2020 — GSC MTG
- MAR 11, 2020 — PUBLIC COMMENT  
CHAPTER 5, GW CONDITIONS
- APR 6, 2020 — GSA WORK SESSION
- MAY 27, 2020 — GSA WORK  
SESSION
- JUN 10, 2020 — STAKEHOLDER  
WORKSHOP #2: WATER  
MANAGEMENT VISION

JUL 8, 2020 — GSC MTG

JUL 9, 2020 — PUBLIC  
COMMENT CHAPTER 6:  
WATER BUDGET

Step 3.  
Set Sustainability  
Goals



CHAPTERS 7-8

AUG 2020 – JAN 2021

AUG 5, 2020 —  
STAKEHOLDER WORKSHOP  
#3: SUSTAINABLE GOAL  
SETTING

AUG 15, 2020 — PUBLIC  
COMMENT ON TECH MEMO

SEP 9, 2020 — GSC MTG

DEC 9, 2020 — GSC MTG

DEC 9, 2020 — PUBLIC  
COMMENT CHAPTERS 7-8:  
SMCS AND MONITORING  
NETWORK

Step 4.  
Develop Plan  
to Sustainability



CHAPTERS 9-10

JAN 2021 – MAR 2021

JAN 6, 2021 —  
STAKEHOLDER WORKSHOP  
#4: PROJECTS AND  
MANAGEMENT ACTIONS

JAN 13, 2021 — GSA WORK  
SESSION

MAR 10, 2021 — GSC MTG

MAR 11, 2021 — PUBLIC  
COMMENT CHAPTER 9-10:  
PROJECTS AND MA'S;  
IMPLEMENTATION PLAN

Step 5.  
Adopt the  
Plan



FINISHED PLAN

APR 2021 – JAN 2022

JUN 9, 2021 — GSC MTG

JUN 10, 2021 — PUBLIC  
COMMENT FULL PLAN

SEP 8, 2021 — GSC MTG

NOV 2021 — GSA MTG

WE ARE HERE

# STAKEHOLDER ENGAGEMENT RESULTS LAST QUARTER

- Create an inclusive, transparent participation experience that builds public trust in the Groundwater Model and GSP and optimizes participation among all those impacted.
- Employ outreach methods that facilitate shared understanding of the importance of sustainable groundwater and its impact on stakeholders.
- Communicate “early and often,” and actively identify and eliminate barriers to participation.
- Develop a cost-effective, stakeholder-informed GSP supported by best-in-class technical data.

## APRIL-JUNE 2020 ENGAGEMENT ACTIVITY AND RESULTS

### STAKEHOLDER OUTREACH TOUCHPOINTS




### STAKEHOLDER LIST


### STAKEHOLDER PARTICIPATION



### PROJECT WEBSITE PERFORMANCE APR-JUN '20 — SLOWaterBasin.com



## STAKEHOLDERS / REPRESENTATION AND PARTICIPATION

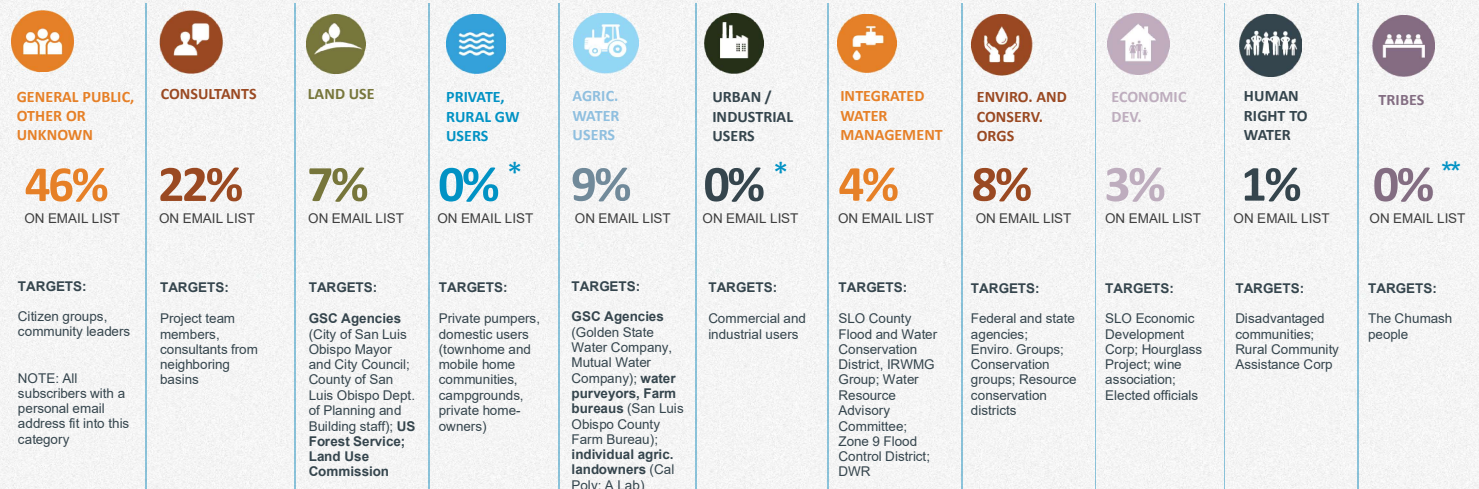

\* This segment is likely represented on our email list among those who did not self-identify an affiliation, which are listed within the “general public or unknown” category above.  
 \*\* Though there are no Native American lands within the Basin, the County of SLO is in the process of contacting the Chumash people about the GSP development in a formal letter.

## KEY ACCOMPLISHMENTS / APR-JUN 2020

CATEGORY	ACCOMPLISHMENTS
Stakeholder Engagement and Outreach	<ul style="list-style-type: none"> <li>• <b>Successfully moved stakeholder engagement to virtual setting</b></li> <li>• <b>4 Email Bulletins</b> sent to Interested Parties list promoting June stakeholder workshop and public comment period</li> <li>• <b>Stakeholder Workshop #2: Groundwater Management Vision</b> — June 10, 2020               <ul style="list-style-type: none"> <li>• 75 attendees representing 10 stakeholder segments</li> <li>• Stakeholder Perception Vision of a “Sustainable SLO Basin” public comment period completed</li> </ul> </li> </ul>
GSP Development	<ul style="list-style-type: none"> <li>• <b>Technical Memo: Surface Water / Groundwater Modeling Approach</b> — drafted, public comment period completed</li> <li>• <b>Chapter 5: Groundwater Conditions</b> — drafted, public comment period completed</li> </ul>
Public Notices	<ul style="list-style-type: none"> <li>• <b>Press Release</b> — Public Workshop and GSC Special Meeting Announcement</li> <li>• <b>GSC Regular June Meeting Cancellation Notice</b> — physically and digitally posted</li> <li>• <b>GSC Special Meeting Notice / July 2020 Agenda Packet Distribution</b> — physically and digitally posted</li> </ul>

## WHAT'S AHEAD / JUL-SEP 2020

CATEGORY	ACCOMPLISHMENTS
Stakeholder Engagement and Outreach	<ul style="list-style-type: none"> <li>• <b>Stakeholder Workshop #3: Getting to Sustainability</b> — August 5, 2020</li> <li>• <b>Stakeholder Perceptions Summary: Sustainability Goals</b> — public comment period</li> <li>• <b>Email Bulletins to interested parties list</b> — July, August, September 2020 for workshop promotion, post-workshop summaries and recording, GSC meeting promotion, and public comment periods</li> <li>• <b>GSA and Farm Bureau partner outreach</b> — July, August, September 2020 to encourage participation among priority segments</li> </ul>
GSP Development	<ul style="list-style-type: none"> <li>• <b>Chapter 6: Water Budget</b> — drafted, public comment period opens July 8, 2020</li> <li>• <b>Data Management Technical Memorandum</b> —public comment period opens September 9, 2020</li> <li>• <b>Integrated Model Calibration Technical Memorandum</b> —public comment period opens September 9, 2020</li> </ul>



## SLO Groundwater Sustainability Plan Public Comments // Updated: 06/09/2020

<b>Name</b>	<b>Comment Subject</b>	<b>Comment</b>	<b>Date/Time</b>
James Waldsmith	GSP Chapters 1 & 2 - DRAFT	Could you send me a copy of the presentations presented on 9-11-19 in PDF format? In reviewing the available download of chapters 1 and 2 I do not find any of the Hydrology data presented. Please confirm receipt of this communication.	9/14/2019 13:24
Toby Moore	GSP Chapters 1 & 2 - DRAFT - Agency Information	Golden State Water Company is of the opinion that an advisory body, similar or with the same structure of the current Groundwater Sustainability Commission (GSC), may be beneficial and perhaps necessary for GSP implementation. The MOU establishing the GSC contemplates this and does have language stating the following, "Depending on the content of the GSP the Parties may decide to enter into a new agreement to coordinate implementation. Inclusion of this language in Section 2.3.2 is recommended. Please consider the addition of the following text before the last sentence in Section 2.3.2. "The Parties may decide to enter into a new agreement to coordinate GSP implementation."	10/31/2019 9:17

George  
Donati

SLO Basin GSP  
Chapters 3 & 4 -  
DRAFT

3.1 SLO Basin Introduction - We need to include the history of the Edna Valley Basin. In the 1950's - 1960's the East branch of the Corral de Piedra creek was dammed to install a 500 acre foot reservoir. In the 1970's, this dam was raised for a 1000 acre foot reservoir. This dam removed all flow of water into the Edna Valley Basin as the water was used for crop irrigation outside of the Edna Valley Basin. The flow downstream of the dam is not properly managed by the owner of the dam and the state water board. This has greatly reduced the re-charge of the Edna Valley Basin for the past 50 years.

3.4.1 Water Source Types - This states " Excluding the Edna Valley Golf Course, all water demand in the SLO Basin are met with groundwater" - This needs to be clarified. The Golf course uses ground water to irrigate the course, and the golf course sells groundwater water to Golden State Water Company for residential use.

3.4.2 Water Use Sectors - Industrial - The ground water wells that supply water to the Price Canyon Oil Field are just outside of the basin boundary. Why are these wells not considered to use groundwater from the Edna Valley Basin since a natural flow from the creek passes adjacent to these wells?

3.6.1.3 We are monitoring the flow of San Luis Obispo Creek as surface water leaves the San Luis Basin. Why not monitor the flow of the other major creeks, east and west Corral de Piedra at the edge of the Edna Valley Basin to determine the flow that is leaving the Basin? Or better yet, the flow that could be coming into the basin below the Dam on the East side of the valley.

1/30/2020 8:10

Toby Moore	Communication and Engagement Plan	Appendix B of the plan describes the Groundwater Communication Portal's functionality which includes a repository of comments provided by stakeholders. However, it does not indicate whether the comments submitted will be visible or available via other means for stakeholders to review. Currently there appears to not be such functionality. As a member of the Groundwater Sustainability Commission, I feel this functionality is helpful and would encourage its implementation.	8/29/2019 9:20
Mark Capeli	SLO GSP Chapter 5 - - DRAFT - 5.8 Potential Groundwater Dependent Ecosystems	Enclosed with this letter are NOAA National Marine Fisheries Service (NMFS) comments on Chapter 5: Groundwater Conditions of the San Luis Obispo Valley Groundwater Basin (SLO Valley Basin) Groundwater Sustainability Plan (GSP). <a href="#">ATTACHMENT: 29MAY2020_Sustainability Plan (Chapter 5) For SLO Valley Groundwater Basin_MC.pdf</a>	5/29/2020 14:59

Steph  
Wald

General Comments

Thank you for the opportunity to comment on Chapter 5 Groundwater Conditions of the SLO Basin Groundwater Sustainability Plan. We previously provided comments dated January 7, 2018, in the earlier phases of the development of the SLO Valley Basin. Those comments provided direction on a framework for addressing Groundwater Dependent Ecosystems (GDE) under SGMA by The Nature Conservancy. Thank you for utilizing the framework and careful consideration of GDEs in Chapter 5.

6/1/2020 14:24

Regarding the integration of technical datasets on GDEs, Figure 5-15 identifies potential GDEs and that those identified are not yet verified. While a monitoring network for future planning efforts may verify GDEs through subsequent field reconnaissance, I would suggest that project development could be informed by having GDE verification sooner rather than later. If this is not possible, and there isn't enough data to label them unlikely GDEs, different language to label them might be appropriate such as less likely GDEs.

Typos:

§Page 25, second paragraph, second sentence, add o to to: The Stillwater study identifies much of the drainage area of East and West Corral de Piedras Creeks, as well as area of alluvium of smaller streams to the southeast, as having high recharge potential.

Thank you.

Toby  
Moore

DRAFT\_SLOGSP\_M  
odeling\_TM No.1.pdf  
Section 5.  
MODFLOW:  
Groundwater Flow  
Model

In section 5.1.5 "Well Pumpage", the memo identifies that the model will estimate well extractions for all wells except those owned and used for "municipal pumpage by the City will be represented in the specific wells owned and operated by the City". Golden State Water Company (GSWC) also owns and operates a public water system (GSWC - Edna System) and their municipal well extractions are metered and should be inputs into the model as opposed to estimates.

6/15/2020 16:41

Suggested text: "CHG estimates of historical well pumpage developed for the water budget analysis will be incorporated into the historical calibration of the groundwater model. Municipal pumpage by the City and Golden State Water Company (GSWC) will be represented in the specific wells owned and operated by the City and GSWC, respectively."

**GROUNDWATER SUSTAINABILITY COMMISSION**  
***for the San Luis Obispo Valley Groundwater Basin***  
**July 8, 2020**

**Agenda Item 7 – Draft GSP Chapter 6 for Review and Comment**  
**(Action Item)**

**Recommendation**

- a) The GSC considers recommending Draft GSP Chapter 6: Water Budget to be received and filed by the GSAs and released for public comment.

**Prepared by**

Spencer Harris, CHG  
Michael Cruikshank, WSC

**Discussion**

The WSC Team, has been tasked with the preparation of the Groundwater Sustainability Plan (GSP) for the SLO Basin to meet the requirements of SGMA. Chapter 6: Water Budget has been drafted as part of this Agenda packet. Chapter 6 of the GSP provides an accounting and assessment of the total annual volume of groundwater and surface water entering and leaving the SLO Basin for historical and current conditions as well as projected future conditions with climate change and management actions. The current water budget developed for this chapter has been prepared analytically for historical and current conditions only and the two subareas that cover the Basin, the San Luis Valley subarea and the Edna Valley subarea, and they are then combined into a single water budget for the entire Basin. Chapter 6 also contains estimates of the preliminary sustainable yield and overdraft for both subareas and the entire Basin. A projected water budget will be included in this chapter at a later date utilizing the integrated computer model.

Chapter 6 will be uploaded to SLOWaterBasin.com for review and public comment after the GSC has recommended that each GSA receives and files the draft chapters. The WSC Team will present an overview of Chapter 6 and show the attendees how to use SLOWaterBasin.com to review the chapter and provide comments.

**Attachments:**


1. Presentation
2. Draft Chapter 6



# GSC SPECIAL MEETING


For the Development of the SLO Basin  
Groundwater Sustainability Plan (GSP)

JULY 8, 2020  
PREPARED BY WATER SYSTEMS CONSULTING




## DRAFT CHAPTER 6: WATER BUDGET

Spencer Harris, CHG




# THE HYDROLOGIC CYCLE (WATER CYCLE)

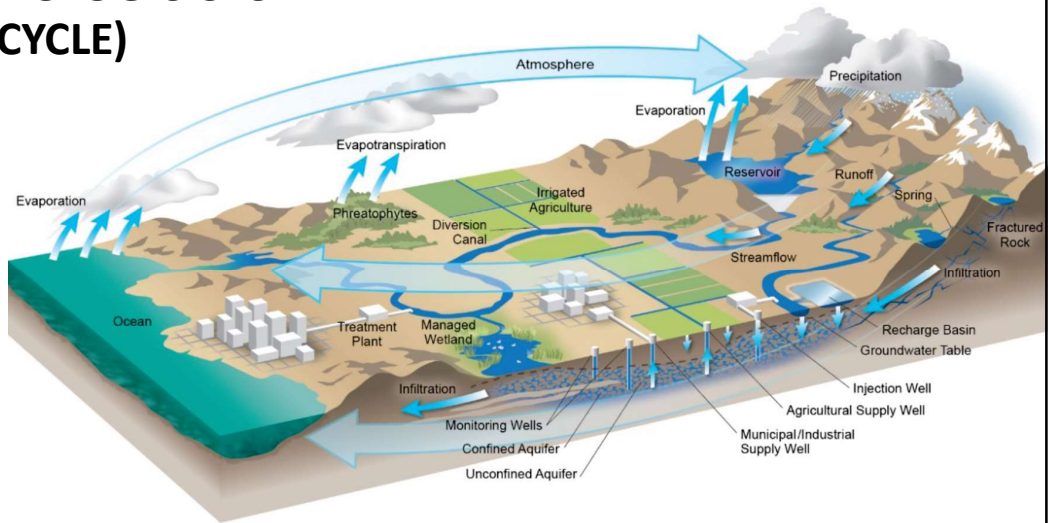

Department of Water Resources (Water Budget BMP, 2016)

## GSP §354.18 WATER BUDGET

(a) Each Plan shall include a water budget for the basin that provides an accounting and assessment of the total annual volume of groundwater and surface water entering and leaving the basin, including historical, current, and projected water budget conditions, and the change in the volume of water stored. Water budget information shall be reported in tabular and graphical form.

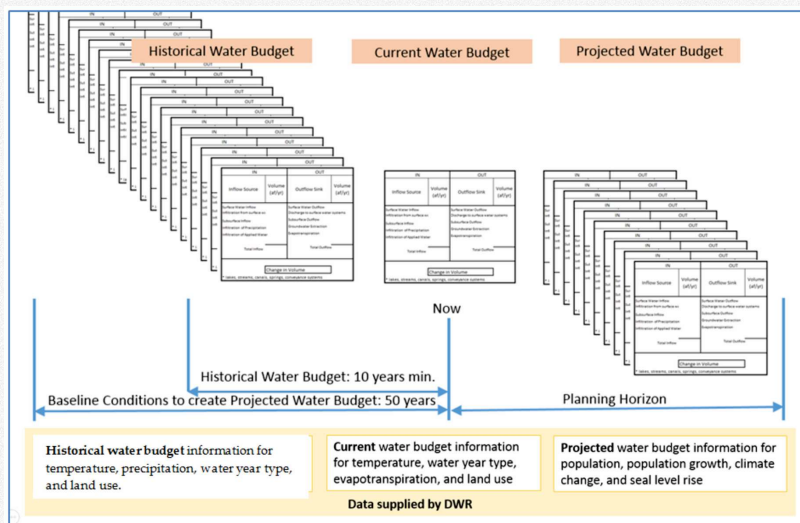

Department of Water Resources (Water Budget BMP, 2016)




# WATER BUDGET METHODOLOGY

## ANALYTICAL MODEL

- Spreadsheet Model
- Inventory Method
- Specific Yield Method
- Input to HCM
- Limited input from SC
- Preliminary Sustainable Yield


## NUMERICAL MODEL

- Integrated Model (GS FLOW)
- Fully Transient / Dynamic
- Model Grid / Flow Equations
- Input from Analytical Model
- Input from Sustainability Criteria
- Final Sustainable Yield

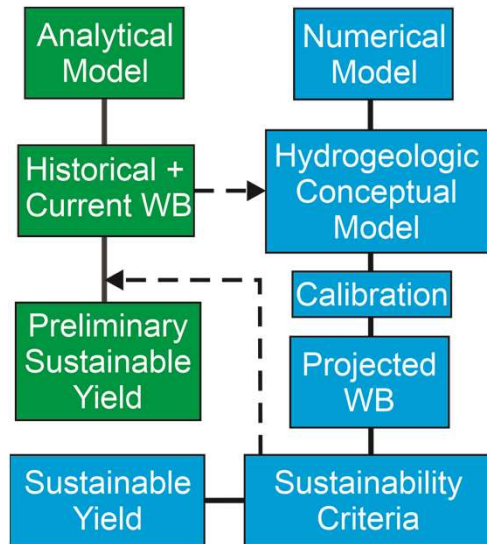


# HYDROLOGIC BASE PERIOD — SLO BASIN

- **Average rainfall over base period (1987-2019)**  
21.76 inches
- **Average rainfall over full record (1871-2019)**  
21.95 inches
- **Cumulative departure from mean precip (1987-2019)**  
-6 inches (-0.18 in/yr)
- **Water in transit**
  - Beginning rainfall  
1985 14.77 inches  
1986 29.43 inches
  - Ending rainfall  
2018 14.34 inches  
2019 29.48 inches
- **Average rainfall over current period (2016-2019)**  
25.6 inches

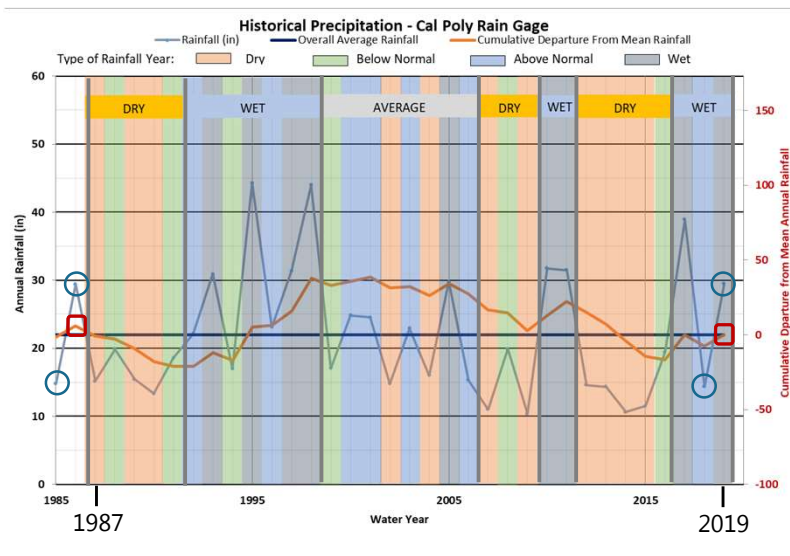

# WATER BUDGET EQUATION

INFLOW – OUTFLOW = CHANGE IN STORAGE

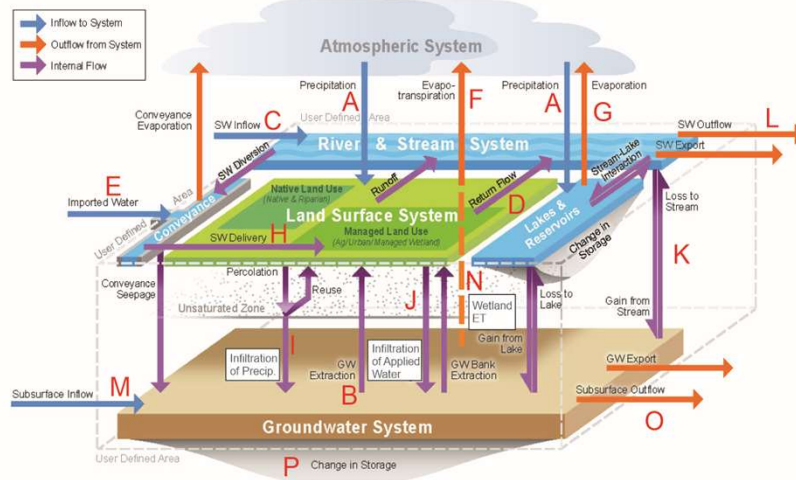

## TWO BUDGET SYSTEMS

- **SURFACE WATER SYSTEM**
  - Atmospheric System
  - River & Stream System
  - Land Surface System
- **GROUNDWATER SYSTEM**

## 16 BUDGET ITEMS

- A - Precipitation
- B - GW extractions\*
- C, L - SW inflow/outflow
- D - Wastewater discharges
- E - Imported
- F, G - Evapotranspiration\*
- H - SW Delivery (Offset)
- I - Infiltration of precipitation
- J - Infiltration of applied water\*
- K - GW-SW interaction
- M, O - Subsurface flow in/out
- N - Wetland ET
- P - Change in storage
- \*Urban and Agricultural sectors

Department of Water Resources (Water Budget BMP, 2016)


# WATER BUDGET SUBAREA OVERVIEW

## SAN LUIS VALLEY

- ~6,800 acres total
- ~500 acres crops
- ~45 sq. mi. watershed
- ~35,000 AF storage
- Urban
- Stable water levels


## EDNA VALLEY

- ~5,900 acres total
- ~3,000 acres crops
- ~16 sq. mi. watershed
- ~106,000 AF storage
- Rural
- Declining water levels

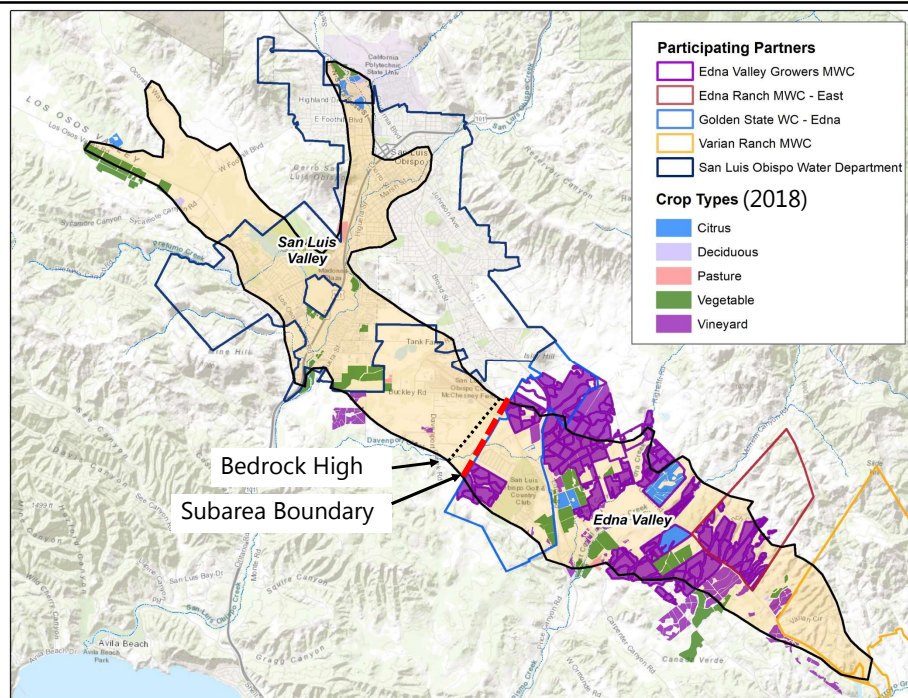

## SURFACE WATER BUDGET — SLO BASIN


- Estimates the elements of the surface water budget on an annual basis
- **LARGEST INFLOWS**
  - Precipitation
  - Stream Inflow
- **LARGEST OUTFLOWS**
  - Evapotranspiration
  - Stream Outflow

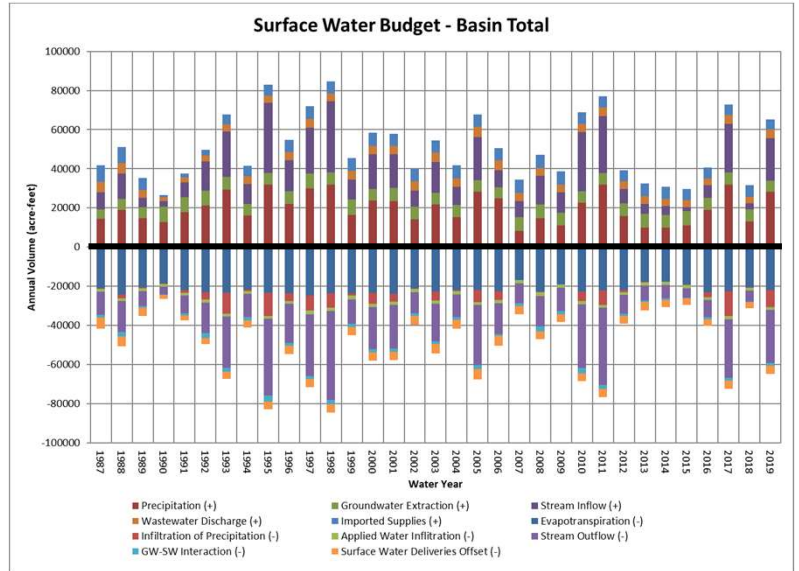

9 | SLO GSC MEETING • JULY 8, 2020

## GROUNDWATER BUDGET — SLO BASIN

- Estimates the elements of the groundwater budget on an annual basis
- **LARGEST INFLOW** – Infiltration of Precipitation
- **LARGEST OUTFLOW** – Extraction from Pumping

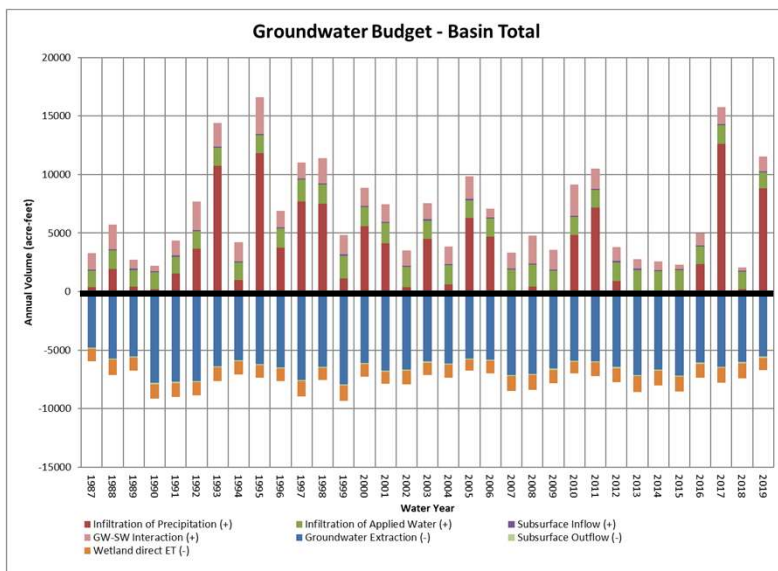

10 | SLO GSC MEETING • JULY 8, 2020

# GROUNDWATER BUDGET – SLO BASIN

## HISTORICAL AVERAGE


(1987-2019)

- Rainfall (+) = 3,500 AFY
- Applied (+) = 1,610 AFY
- GW-SW (+) = 1,480 AFY
- Subsurface (+) = 450 AFY
- Pumping (-) = 6,460 AFY
- Wetland ET (-) = 1,160 AFY
- Subsurface (-) = 220 AFY
- Inflow – Outflow = Change in Storage  
7,040 – 7,840 = **- 800 AFY**

## CURRENT

(2016-2019)

- Rainfall (+) = 5,990 AFY
- Inflow – Outflow = Change in Storage  
8,900 – 7,400 = **+1,500 AFY**

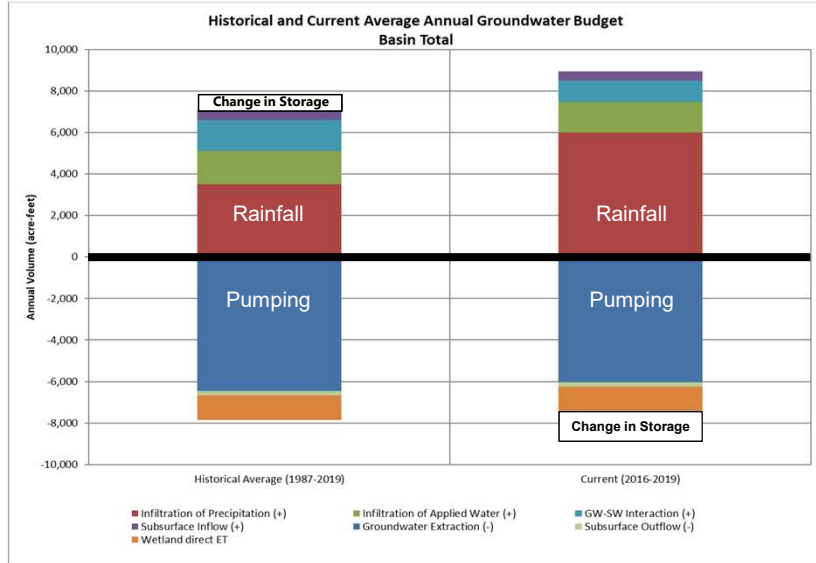

# SLO BASIN GROUNDWATER PUMPING BY USE

## HISTORICAL AVERAGE


(1987-2019)

- Urban ~ 1,620 AFY
- Agriculture ~ 4,840 AFY
- Total ~ 6,500 AFY

## CURRENT

(2016-2019)

- Urban ~ 1,220 AFY
- Agriculture ~ 4,810 AFY
- Total ~ 6,000 AFY

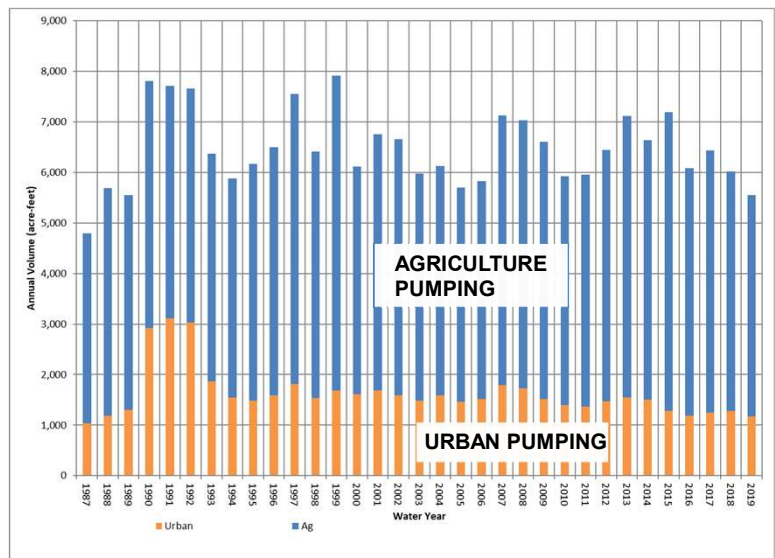


# SAN LUIS VALLEY SUBAREA GROUNDWATER PUMPING

## HISTORICAL AVERAGE (1987-2019)

- Urban ~ 740 AFY
- Agriculture ~ 1,630 AFY
- Total ~ 2,370 AFY

## CURRENT (2016-2019)

- Urban ~ 400 AFY
- Agriculture ~ 1,370 AFY
- Total ~ 1,770 AFY

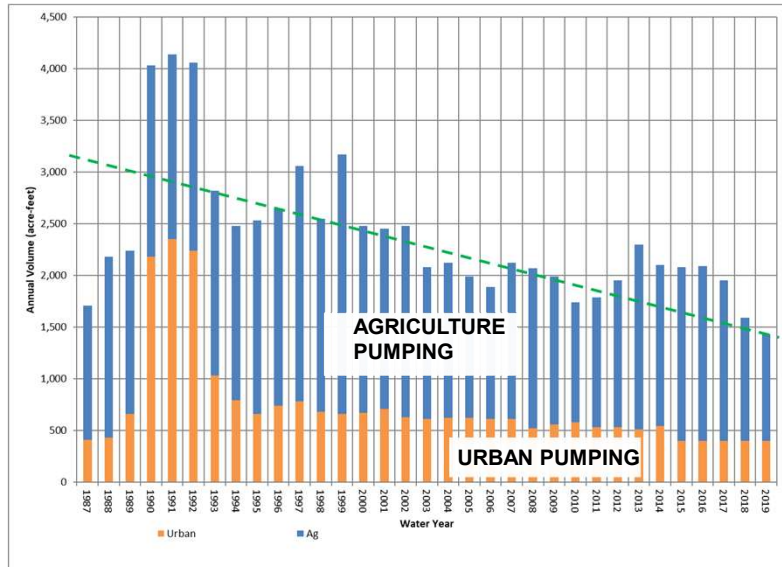


# EDNA VALLEY SUBAREA GROUNDWATER PUMPING

## HISTORICAL AVERAGE (1987-2019)

- Urban ~ 880 AFY
- Agriculture ~ 3,210 AFY
- Total ~ 4,090 AFY


## CURRENT (2016-2019)

- Urban ~ 820 AFY
- Agriculture ~ 3,440 AFY
- Total ~ 4,260 AFY

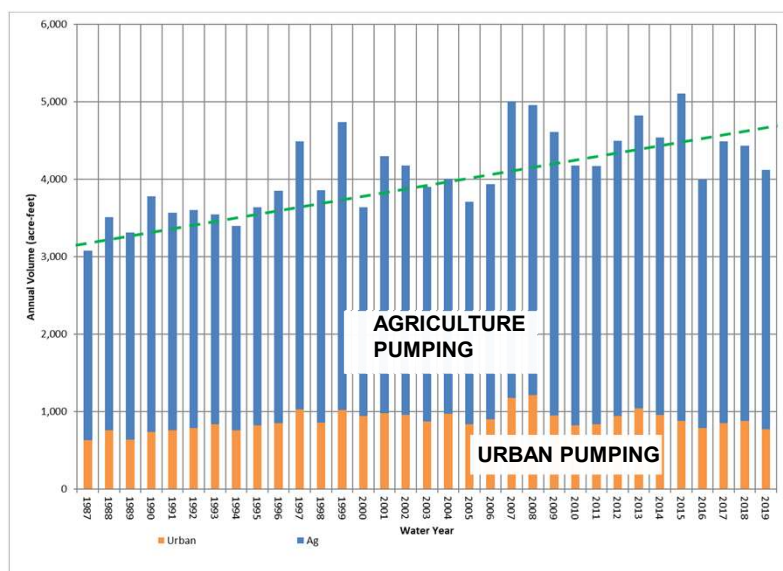

## GROUNDWATER IN STORAGE

- **HISTORICAL AVERAGE**  
(1987 - 2019)
  - San Luis Valley subarea change in storage  
36,940 – 36,310 = **+ 630 AF**
  - Edna Valley subarea change in storage  
105,390 – 132,840 = **-27,450 AF**
  - Basin total change in storage  
142,330 – 169,150 = **-26,820 AF**
- Over 33 Years = **-800 AFY**
- **CURRENT**  
(2016 -2019)
  - Basin total change in storage  
142,330 – 136,360 = **+5970 AF**  
Over 4 Years = **+1,500 AFY**

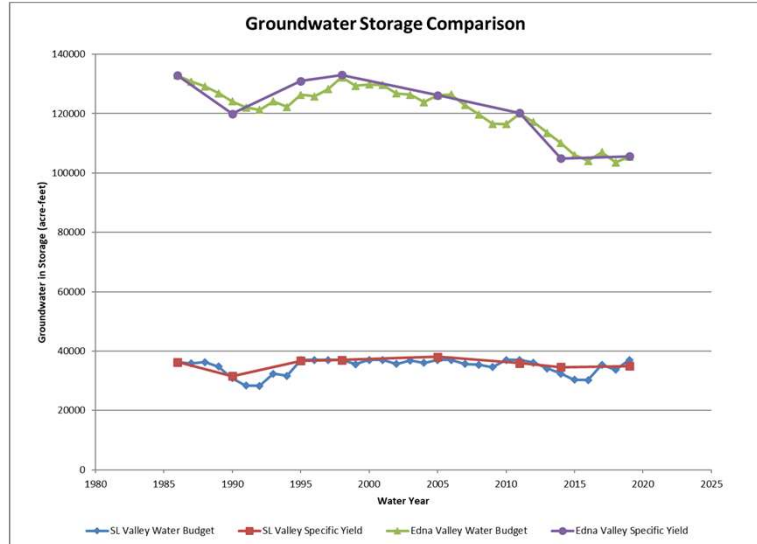

15 | SLO GSC MEETING • JULY 8, 2020

## SUSTAINABLE YIELD AND OVERDRAFT

Sustainable Yield – the maximum quantity of water, calculated over a base period representative of long-term conditions in the basin and including any temporary surplus, that can be withdrawn annually from a groundwater supply without causing an undesirable result. (SGMA)

Overdraft – The condition of a groundwater basin or subbasin where the amount of water withdrawn by pumping exceeds the amount of water that recharges a basin over a period of years, during which the water supply conditions approximate average conditions. (DWR Bulletin 118)

16 | SLO GSC MEETING • JULY 8, 2020

## PRELIMINARY SUSTAINABLE YIELD ESTIMATE

### San Luis Valley Subarea

Recharge – Wetland Demand =  
Preliminary Sustainable Yield

$$3,700 - 1,200 = \mathbf{2,500\ AFY}$$

### Edna Valley Subarea

Recharge – Subsurface Outflow =  
Preliminary Sustainable Yield

$$3,400 - 100 = \mathbf{3,300\ AFY}$$

### Basin Total

San Luis Valley + Edna Valley =  
Basin Total

$$2,500 + 3,300 = \mathbf{5,800\ AFY}$$

## PRELIMINARY OVERDRAFT ESTIMATE

### San Luis Valley Subarea

Sustainable Yield – Pumping =  
**+Surplus** or **-Deficit (Overdraft)**

$$2,500 - 1,800 = \mathbf{+700\ AFY}$$

### Edna Valley Subarea

Sustainable Yield – Pumping =  
**+Surplus** or **-Deficit (Overdraft)**

$$3,300 - 4,400 = \mathbf{-1,100\ AFY}$$

### Basin Total

San Luis Valley + Edna Valley =  
Basin Total

$$\mathbf{+700 + -1,100 = -400\ AFY}$$

17 | SLO GSC MEETING • JULY 8, 2020

## HOW TO SUBMIT PUBLIC COMMENT



### REVIEW AND COMMENT.

#### Chapter 6: Water Budget

Public Comment period will  
be open tomorrow upon GSC  
approval and closes 09/30/20.

Go to [SLOWaterBasin.com](http://SLOWaterBasin.com) click on  
“Review Documents”

18 | SLO GSC MEETING • JULY 8, 2020





Draft  
**Groundwater Sustainability Plan**  
**Chapter 6 – Water Budget**

for the

**San Luis Obispo Valley Groundwater Basin**  
**Groundwater Sustainability Agencies**



Prepared by



6/25/2020

## TABLE OF CONTENTS

### Table of Contents

List of Figures .....	i
Tables .....	iv
Appendices.....	v
List of Terms Used.....	vi
Executive Summary.....	1
Introduction to the SLO Basin GSP .....	
1.1 Purpose of the Groundwater Sustainability Plan.....	
1.2 Description of SLO Basin .....	
1.3 Basin Prioritization .....	
2 Agency Information (§ 354.6) .....	
2.1 Agencies Names and Mailing Addresses.....	
2.2 Agencies Organization and Management Structures .....	
2.2.1 County of San Luis Obispo.....	
2.2.2 City of San Luis Obispo .....	
2.2.3 Other Participating Parties in the MOA .....	
2.2.3.1 Edna Valley Growers Mutual Water Company .....	
2.2.3.2 Varian Ranch Mutual Water Company .....	
2.2.3.3 Edna Ranch Mutual Water Company.....	
2.2.3.4 Golden State Water Company .....	
2.3 Authority of Agencies.....	
2.3.1 Groundwater Sustainability Agencies .....	
2.3.1.1 County of San Luis Obispo.....	
2.3.1.2 City of San Luis Obispo .....	
2.3.2 Memorandum of Agreement.....	
2.3.3 Coordination Agreements.....	
2.4 Contact information for Plan Manager .....	
3 Description of Plan Area (§ 354.8) .....	
3.1 SLO Basin Introduction.....	
3.2 Adjudicated Areas .....	
3.3 Jurisdictional Areas .....	
3.3.1 Federal Jurisdictions.....	
3.3.2 Tribal Jurisdiction .....	

- 3.3.3 State Jurisdictions .....
- 3.3.4 County Jurisdictions .....
- 3.3.5 City and Local Jurisdictions .....
- 3.3.6 Special Districts .....
- 3.4 Land Use.....
- 3.4.1 Water Source Types .....
- 3.4.2 Water Use Sectors.....
- 3.5 Density of Wells .....
- 3.6 Existing Monitoring and Management Programs .....
- 3.6.1 Groundwater Monitoring.....
- 3.6.1.1 Groundwater Level Monitoring .....
- 3.6.1.2 Groundwater Quality Monitoring .....
- 3.6.1.3 Surface Water Monitoring .....
- 3.6.1.4 Climate Monitoring .....
- 3.6.2 Existing Management Plans .....
- 3.6.2.1 SLO Basin Characterization and Monitoring Well Installation .....
- 3.6.2.2 San Luis Obispo County Master Water Report (2012) .....
- 3.6.2.3 San Luis Obispo County Integrated Regional Water Management Plan (2014) .....
- 3.6.2.4 City of San Luis Obispo 2015 Urban Water Management Plan (2016) .....
- 3.6.3 Existing Groundwater Regulatory Programs.....
- 3.6.3.1 Groundwater Export Ordinance (2015) .....
- 3.6.3.2 Well Ordinances, County and City .....
- 3.6.3.3 Countywide Water Conservation Program Resolution 2015-288 (2015) .....
- 3.6.3.4 Agricultural Order R3-2017-002 (2017) .....
- 3.6.3.5 Water Quality Control Plan for the Central Coast Basins (2017) .....
- 3.6.3.6 California DWR Well Standards (1991) .....
- 3.6.3.7 Requirements for New Wells (2017).....
- 3.6.3.8 Title 22 Drinking Water Program (2018).....
- 3.6.3.9 Waterway Management Plan – San Luis Obispo Creek Watershed (2003) .....
- 3.6.3.10 Incorporation Into GSP.....
- 3.6.3.11 Limits to Operational Flexibility .....
- 3.7 Conjunctive Use Programs .....
- 3.8 Land Use Plans .....
- 3.8.1 City of San Luis Obispo General Plan .....
- 3.8.2 County of San Luis Obispo General Plan .....

3.8.3	Los Ranchos/Edna Village Plan.....	3
3.8.4	Plan Implementation Effects on Existing Land Use.....	
3.8.5	Plan Implementation Effects on Water Supply .....	
3.8.6	Well Permitting .....	
3.8.7	Land Use Plans Outside of Basin .....	
3.9	Management Areas.....	
3.9.1	Reason for Creation .....	
3.10	Additional GSP Elements, if Applicable .....	
4	Basin Setting (§ 354.14) .....	
4.1	Basin Topography and Boundaries .....	
4.2	Primary Users of Groundwater .....	
4.3	Soils Infiltration Potential.....	
4.4	Regional Geology .....	
4.4.1	Regional Geologic Structures .....	
4.4.2	Geologic Formations within the Basin .....	
4.4.2.1	Alluvium .....	
4.4.2.2	Paso Robles Formation .....	
4.4.2.3	Pismo Formation .....	
4.4.3	Geologic Formations Surrounding the Basin .....	
4.4.3.1	Monterey Formation.....	
4.4.3.2	Obispo Formation .....	
4.4.3.3	Franciscan Assemblage .....	
4.5	Principal Aquifers and Aquitards .....	
4.5.1	Cross Sections .....	
4.5.2	Aquifer Characteristics.....	
4.5.3	Aquitards.....	
4.6	Surface Water Bodies.....	
4.7	Subsidence Potential.....	
5	Groundwater Conditions (§ 354.16) .....	
5.1	Groundwater Elevations and Intepretation .....	
5.1.1	Fall 1954 Groundwater Elevations.....	
5.1.2	Spring 1990 Groundwater Elevations .....	
5.1.3	Modeled 1990s Groundwater Elevations .....	
5.1.4	Spring 1997 Groundwater Elevations .....	
5.1.5	Spring 2011 Groundwater Elevations .....	

- 5.1.6 Spring 2015 Groundwater Elevations .....
- 5.1.7 Spring 2019 Groundwater Elevations .....
- 5.1.8 Fall 2019 Groundwater Elevations .....
- 5.1.9 Changes in Groundwater Elevation .....
- 5.1.10 Vertical Groundwater Gradients .....
- 5.2 Groundwater Elevation Hydrographs .....
- 5.3 Groundwater Recharge and Discharge Areas .....
- 5.3.1 Groundwater Recharge Areas .....
- 5.3.1.1 Infiltration of Precipitation .....
- 5.3.1.2 Subsurface Inflow .....
- 5.3.1.3 Percolation of Streamflow .....
- 5.3.1.4 Anthropogenic Recharge .....
- 5.3.2 Groundwater Discharge Areas .....
- 5.4 Change in Groundwater Storage .....
- 5.5 Seawater Intrusion .....
- 5.6 Subsidence .....
- 5.7 Interconnected Surface Water .....
- 5.7.1 Depletion of Interconnected Surface Water .....
- 5.8 Potential groundwater dependent ecosystems .....
- 5.8.1 Hydrology .....
- 5.8.1.1 Overview of GDE Relevant Surface and Groundwater Hydrology .....
- 5.8.1.2 Losing and Gaining Reaches .....
- 5.8.2 Vegetation and Wetland Groundwater Dependent Ecosystem Identification .....
- 5.8.3 Identification of Special-Status Species and Sensitive Natural Communities Associates with GDE's .....
- 5.9 Groundwater Quality Distribution and Trends .....
- 5.9.1 Groundwater Quality Suitability for Drinking Water .....
- 5.9.2 Distribution and Concentrations of Point Sources of Groundwater Constituents .....
- 5.9.3 Distribution and Concentrations of Diffuse or Natural Groundwater Constituents .....
- 5.9.3.1 Total Dissolved Solids .....
- 5.9.3.2 Nitrate .....
- 5.9.3.3 Arsenic .....
- 5.9.3.4 Boron .....
- 5.9.3.5 Other Constituents .....

6	Water Budget (§ 354.18)	2
6.1	Climate	17
6.1.1	Historical Climate/Base Period	17
6.2	Water Budget Data Sources	22
6.3	Historical Water Budget	22
6.3.1	Historical Time Period	22
6.3.2	Historical Land Use	23
6.3.3	Historical Surface Water Budget	26
6.3.4	Historical Groundwater Budget	33
6.3.5	Total Groundwater in Storage	44
6.3.6	Change in Storage	49
6.3.7	Sustainable Yield	52
6.3.8	Quantification of Overdraft (Historical)	53
6.4	Current Water Budget	53
6.5	Projected Water Budget	64
6.5.1	Assumptions	64
6.5.2	Inflows	64
6.5.3	Outflows	64
6.5.4	Change In Storage	64
6.5	Projected Water Budget	64
6.5.1	Assumptions	64
6.5.2	Inflows	64
6.5.3	Outflows	64
6.5.4	Change In Storage	64
7	Sustainable Management Criteria (§ 354.22-30)	
7.1	Sustainability Goal	
7.2	Process for Establishing Sustainable Management Criteria	
7.2.1	Minimum Thresholds	
7.2.2	Measurable Objectives	
7.2.3	Undesirable Results	
7.3	Chronic Lowering of Groundwater Levels Sustainability Indicator	
7.3.1	Locally Defined Undesirable Results	
7.3.2	Minimum Thresholds and Measurable Objectives	
7.3.3	Relation to Other Sustainability Indicators	

- 7.4 Change in Storage Sustainability Indicator .....
  - 7.4.1 Locally Defined Undesirable Results .....
  - 7.4.2 Minimum Thresholds .....
  - 7.4.3 Measurable Objectives .....
  - 7.4.4 Relation to Other Sustainability Indicators .....
- 7.5 Seawater Intrusion Sustainability Indicator .....
  - 7.5.1 Locally Defined Undesirable Results .....
  - 7.5.2 Minimum Thresholds .....
  - 7.5.3 Measurable Objectives .....
  - 7.5.4 Relation to Other Sustainability Indicators .....
- 7.6 Degraded Water Quality Sustainability Indicator .....
  - 7.6.1 Locally Defined Undesirable Results .....
  - 7.6.2 Minimum Thresholds .....
  - 7.6.3 Measurable Objectives .....
  - 7.6.4 Relation to Other Sustainability Indicators .....
- 7.7 Subsidence Sustainability Indicator .....
  - 7.7.1 Locally Defined Undesirable Results .....
  - 7.7.2 Minimum Thresholds .....
  - 7.7.3 Measurable Objectives .....
  - 7.7.4 Relation to Other Sustainability Indicators .....
- 7.8 Depletion of Interconnected Surface Water Sustainability Indicator .....
  - 7.8.1 Locally Defined Undesirable Results .....
  - 7.8.2 Minimum Thresholds .....
  - 7.8.3 Measurable Objectives .....
  - 7.8.4 Relation to Other Sustainability Indicators .....
- 7.9 Management Areas.....
  - 7.9.1 Minimum Thresholds and Measurable Objectives .....
  - 7.9.2 Monitoring and Analysis .....
  - 7.9.3 Explanation of How Operation of Management Area Will Avoid Undesirable Results .....
- 8 Monitoring Networks (§ 354.34).....
  - 8.1 Monitoring Objectives .....
  - 8.2 Monitoring Network .....
    - 8.2.1 Chronic Lowering of Groundwater Levels.....
    - 8.2.2 Reduction of Groundwater Storage .....
    - 8.2.3 Seawater Intrusion .....

8.2.4	Groundwater Quality .....
8.2.5	Land Subsidence.....
8.2.6	Depletion of Interconnected Surface Water.....
8.3	Groundwater Monitoring Protocol .....
8.4	Data Management System.....
8.5	Assessment and Improvement of Monitoring Network .....
8.6	Annual Reports.....
8.7	Periodic Evaluation by Agency .....
9	Projects and Management Actions (§ 354.44).....
9.1	Projects .....
9.1.1	Project A.....
9.2	Management Actions.....
9.2.1	Management Action A .....
9.3	Projects Needed to Mitigate Overdraft .....
10	Implementation Plan.....
10.1	Cost of Implementation .....
10.2	Funding Alternatives .....
10.3	Implementation Schedule.....
10.4	GSP Annual Reporting .....
10.5	Periodic Evaluations of GSP .....
11	Notice and Communications (§ 354.10).....
11.1	Communications and Engagement Plan .....
11.2	Nature of Consultations .....
11.3	Public Meetings.....
11.4	Incorporation of Feedback in Decision-Making Process.....
11.5	Comments Received .....
11.6	Responses to Comments.....
12	Interagency Agreements (§ 357.2-4) .....
12.1	Coordination Agreements.....
13	References.....
14	Appendices .....

The grey highlighted sections in the Table of Contents (TOC) indicate that the section has been previously released (Chapters 1 through 5) or will be released in the future (Chapters 7 through 14). The complete list of the anticipated TOC is presented to give the reader context as to how Chapter 6 – Water Budget, connects with the complete Groundwater Sustainability Plan.



## LIST OF FIGURES

Figure 6-1: The Hydrologic Cycle. Source: Department of Water Resources (Water Budget BMP, 2016)...	3
Figure 6-2: Components of the Water Budget. Source: Modified from Department of Water Resources (Water Budget BMP, 2016).....	4
Figure 6-3: Water Budget Subareas.....	5
Figure 6-4: Surface Water Budget – San Luis Valley Subarea.....	11
Figure 6-5: Surface Water Budget – Edna Valley Subarea.....	12
Figure 6-6: Surface Water Budget – Basin Total.....	13
Figure 6-7: Groundwater Budget – San Luis Valley Subarea.....	14
Figure 6-8: Groundwater Budget – Edna Valley Subarea.....	15
Figure 6-9: Groundwater Budget – Basin Total.....	16
Figure 6-10: 1987-2019 Historical Base Period Climate.....	18
Figure 6-11: Rainfall Correlation Cal Poly vs. Gas Company.....	20
Figure 6-12: San Luis Obispo Valley Basin Irrigated Crops 2016.....	24
Figure 6-13: Basin Sub-watershed Areas and Isohyetals.....	28
Figure 6-14: Runoff vs Rainfall Correlation for Subareas.....	29
Figure 6-15: Rainfall vs Infiltration.....	35
Figure 6-16: Bedrock Subsurface Inflow Reaches.....	38
Figure 6-17: Consumptive Use of Applied Water.....	42
Figure 6-18: Groundwater Elevation Contours Spring 1986.....	46
Figure 6-19: Groundwater Elevation Contours Spring 2019.....	47
Figure 6-20: Storage Volume Grids.....	48
Figure 6-21: Groundwater Storage Estimate Comparison for Basin Subareas.....	51
Figure 6-22: Historical and Current Average Annual Surface Water Budget – San Luis Valley Subarea. ...	58
Figure 6-23: Historical and Current Average Annual Surface Water Budget – Edna Valley Subarea.....	59
Figure 6-24: Historical and Current Average Annual Surface Water Budget – Basin Total.....	60
Figure 6-25: Historical and Current Average Annual Groundwater Budget – San Luis Valley Subarea.....	61
Figure 6-26: Historical and Current Average Annual Groundwater Budget – Edna Valley Subarea.....	62
Figure 6-27: Historical and Current Average Annual Groundwater Budget – Basin Total.....	63

## TABLES

Table 6-1: Historical Water Budget - San Luis Valley Subarea.....	8
Table 6-2: Historical Water Budget - Edna Valley Subarea.....	9
Table 6-3: Historical Water Budget - San Luis Obispo Valley Groundwater Basin.....	10
Table 6-4: Historical Base Period Rainfall.....	21
Table 6-5: Irrigated Agriculture Acreages.....	25
Table 6-6: Land Cover Acreages.....	26
Table 6-7: Stream Outflow Comparison.....	33
Table 6-8: Minimum Rainfall for Infiltration.....	36
Table 6-9: Subsurface Inflow Estimates.....	37
Table 6-10: Rural Residential Water Use.....	41
Table 6-11: Consumptive Use of Applied Water.....	43
Table 6-12: Subsurface Outflow Estimates.....	44
Table 6-13: Specific Yield Averages.....	45
Table 6-14: Spring Groundwater Storage Estimates.....	49
Table 6-15: Change in Storage Comparison – Historical Base Period 1987 – 2019.....	50
Table 6-16: Preliminary Sustainable Yield (AFY).....	52
Table 6-17: Estimated Overdraft (AFY).....	53
Table 6-18: Current Water Budget - San Luis Valley Subarea.....	55
Table 6-19: Current Water Budget - Edna Valley Subarea.....	56
Table 6-20: Current Water Budget - Basin Total.....	57

## **APPENDICES**

## LIST OF TERMS USED

<b>Abbreviation</b>	<b>Definition</b>
AB	Assembly Bill
ADD	Average Day Demand
AF	Acre Feet
AFY	Acre Feet per Year
AMSL	Above Mean Sea Level
Basin Plan	Water Quality Control Plan for the Central Coast Basin
Cal Poly	California Polytechnic State University
CASGEM	California State Groundwater Elevation Monitoring program
CCR	California Code of Regulations
CCRWQCB	Central Coast Regional Water Quality Control Board
CCGC	Central Coast Groundwater Coalition
CDFM	Cumulative departure from the mean
CDPH	California Department of Public Health
CIMIS	California Irrigation Management Information System
City	City of San Luis Obispo
County	County of San Luis Obispo
CPUC	California Public Utilities Commission
CPWS-52	Cal Poly Weather Station 52
CRWQCB	California Regional Water Quality Control Board
CWC	California Water Code
DDW	Division of Drinking Water
Du/ac	Dwelling Units per Acre
DWR	Department of Water Resources
EPA	Environmental Protection Agency
ERMWC	Edna Ranch Mutual Water Company
ET <sub>0</sub>	Evapotranspiration
EVMWC	Edna Valley Growers Ranch Mutual Water Company
°F	Degrees Fahrenheit
FAR	Floor Area Ratio
FY	Fiscal Year
GAMA	Groundwater Ambient Monitoring and Assessment program
GHG	Greenhouse Gas
GMP	Groundwater Management Plan
GPM	Gallons per Minute
GSA	Groundwater Sustainability Agency
GSC	Groundwater Sustainability Commission
GSP	Groundwater Sustainability Plan
GSWC	Golden State Water Company
IRWMP	San Luis Obispo County Integrated Regional Water Management Plan
kWh	Kilowatt-Hour
LUCE	Land Use and Circulation Element
LUFTs	Leaky Underground Fuel Tanks
MAF	Million Acre Feet
MCL	Maximum Contaminant Level

<b>Abbreviation</b>	<b>Definition</b>
MG	Million Gallons
MGD	Million Gallons per Day
Mg/L	Milligrams per Liter
MOA	Memorandum of Agreement
MOU	Memorandum of Understanding
MWR	Master Water Report
NCDC	National Climate Data Center
NOAA	National Oceanic and Atmospheric Administration
NWIS	National Water Information System
RW	Recycled Water
RWQCB	Regional Water Quality Control Board
SB	Senate Bill
SGMA	Sustainable Groundwater Management Act
SGMP	Sustainable Groundwater Management Planning
SGWP	Sustainable Groundwater Planning
SLO Basin	San Luis Obispo Valley Groundwater Basin
SLOFCWCD	San Luis Obispo Flood Control and Water Conservation District
SCML	Secondary Maximum Contaminant Level
SOI	Sphere of Influence
SNMP	Salt and Nutrient Management Plan
SWRCB	California State Water Resources Control Board
TDS	Total Dissolved Solids
TMDL	Total Maximum Daily Load
USGS	United States Geological Survey
USFW	United States Fish and Wildlife Service
USTs	Underground Storage Tanks
UWMP	Urban Water Management Plan
UWMP Act	Urban Water Management Planning Act
UWMP Guidebook	Department of Water Resources 2015 Urban Water Management Plan Guidebook
VRMWC	Varian Ranch Mutual Water Company
WCS	Water Code Section
WMP	Water Master Plan
WPA	Water Planning Areas
WRF	Water Reclamation Facility
WRCC	Western Regional Climate Center
WRRF	Water Resource Recovery Facility
WSA	Water Supply Assessment
WTP	Water Treatment Plant
WWTP	Wastewater Treatment Plant

## **EXECUTIVE SUMMARY**

This section to be completed after GSP is complete.

## 6 WATER BUDGET (§ 354.18)

The purpose of a water budget is to provide an accounting and assessment of the total annual volume of groundwater and surface water entering and leaving the Basin, including historical, current, and projected water budget conditions, and the change in volume stored. Both numerical and analytical methods have been used during water budget preparations for the GSP. The analytical method as used in this document refers to application of the water budget equation and the inventory method using spreadsheets, with groundwater flow estimates based on Darcy's Law and change in storage calculations based on the specific yield method.

Numerical methods refer to surface water and groundwater flow modeling, which provide a dynamic and more rigorous analysis of both surface-groundwater interactions and the impacts from pumping on groundwater in storage. The historical and current analytical groundwater budget will be used as part of the Basin conceptual model to prepare input estimates and provide a check for the numerical model, from which the projected water budget will be produced. This chapter presents the analytical water budget for the historical and current periods and the numerical model water budget for the projected future period. Once the numerical model water budget is calibrated, the results will be presented as comparisons to the analytical water budget.

A water budget identifies and quantifies various components of the hydrologic cycle within a user-defined area, in this case the San Luis Obispo Valley groundwater Basin. Water circulates between the atmospheric system, land surface system, surface water bodies, and the groundwater system, as shown in Figure 6-1(DWR, 2016). The water budget equation used for the analytical method is as follows:

$$\text{INFLOW} - \text{OUTFLOW} = \text{CHANGE IN STORAGE}$$

Inflow is the sum of all surface water and groundwater entering the Basin and outflow is the sum of all surface water and groundwater leaving the Basin. The difference between total inflow and total outflow over a selected time period is equal to the change in total storage (surface water and groundwater) within the Basin over the same period. Components of inflow and outflow represented in the water budget are shown in Figure 6-2. Not all of the components shown are needed for the San Luis Obispo Valley Groundwater Basin GSP. A key using letters to represent components in this water budget has been added to Figure 6-2 for reference with the main water budget tables. Some components have been modified and renamed from the original DWR figure to better represent this specific water budget.

The water budget equation given above is simple in concept, but it is challenging to measure and account for all the components of inflow and outflow within a Basin. Some of these components can be measured or estimated independently, while others are calculated using the water budget equation. The water budget for this GSP has been prepared for the two subareas that cover the Basin, the San Luis Valley subarea and the Edna Valley subarea (Figure 6-3). Subareas are not to be confused with subbasins, and are defined for this water budget analysis. They are then combined into a single water budget for the entire Basin. Both subarea water budgets and the Basin water budget are included herein. Surface water (combined atmospheric, land surface, and stream systems) and groundwater budgets have been prepared for each subarea and for the Basin. The subarea approach for water budget calculations follows the approach used by prior investigators (Boyle, 1991; DWR, 1997).

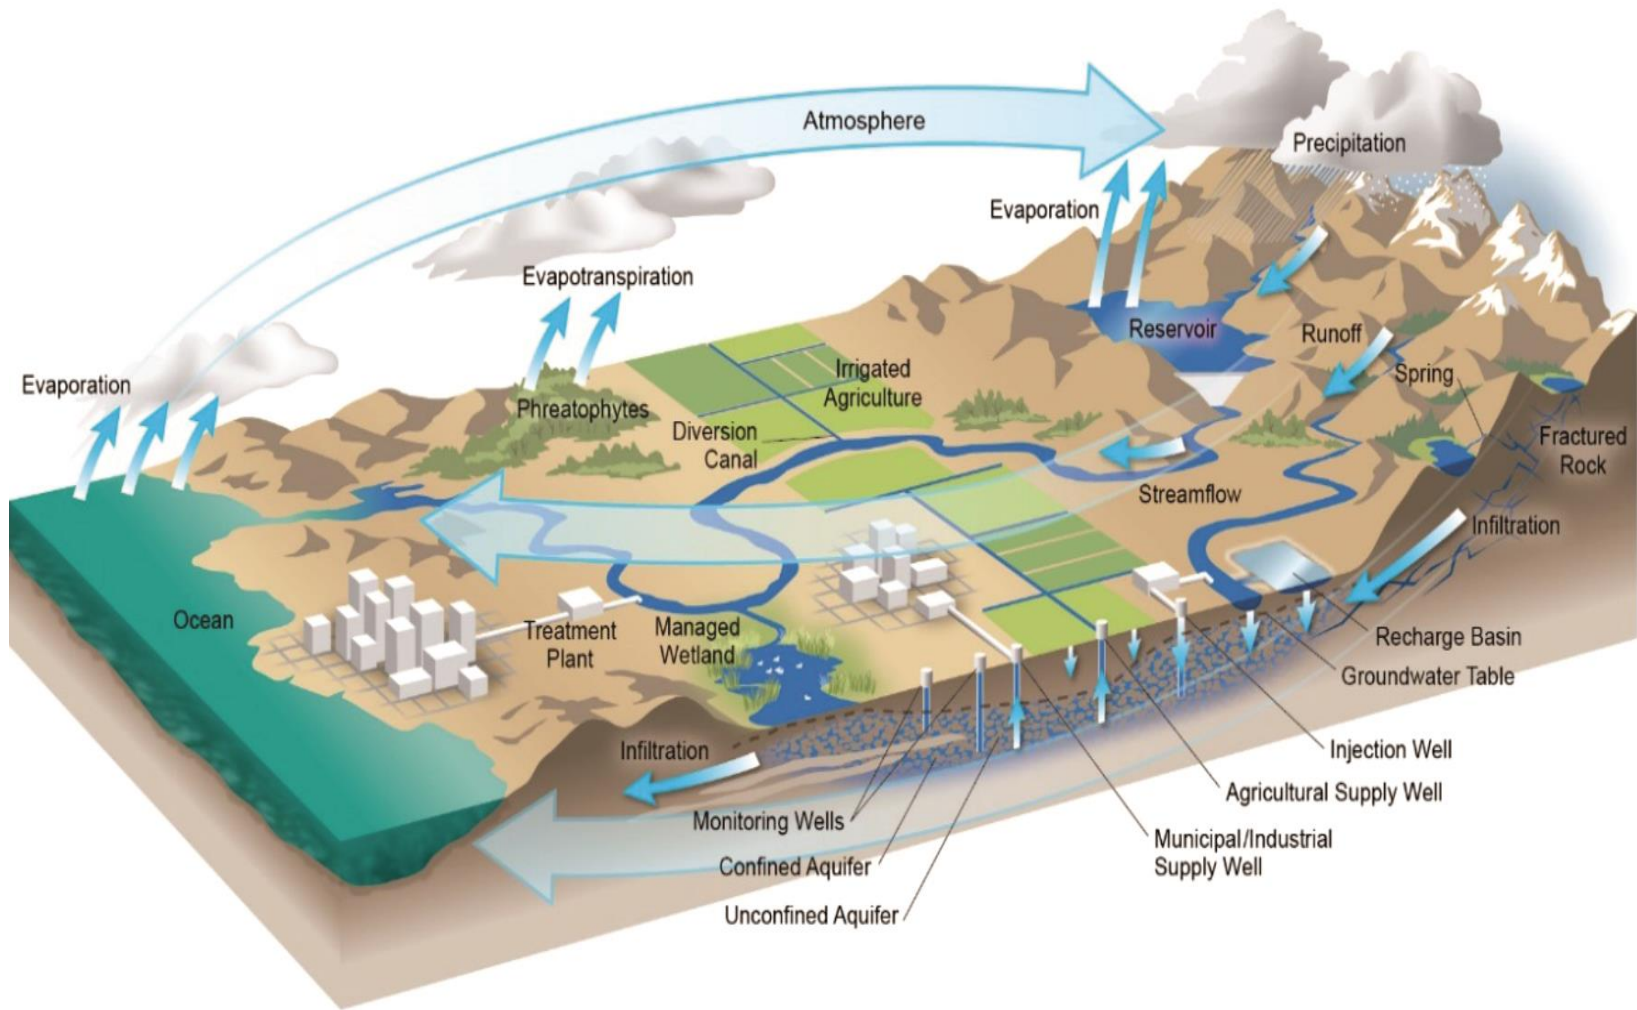


Figure 6-1: The Hydrologic Cycle. Source: Department of Water Resources (Water Budget BMP, 2016)





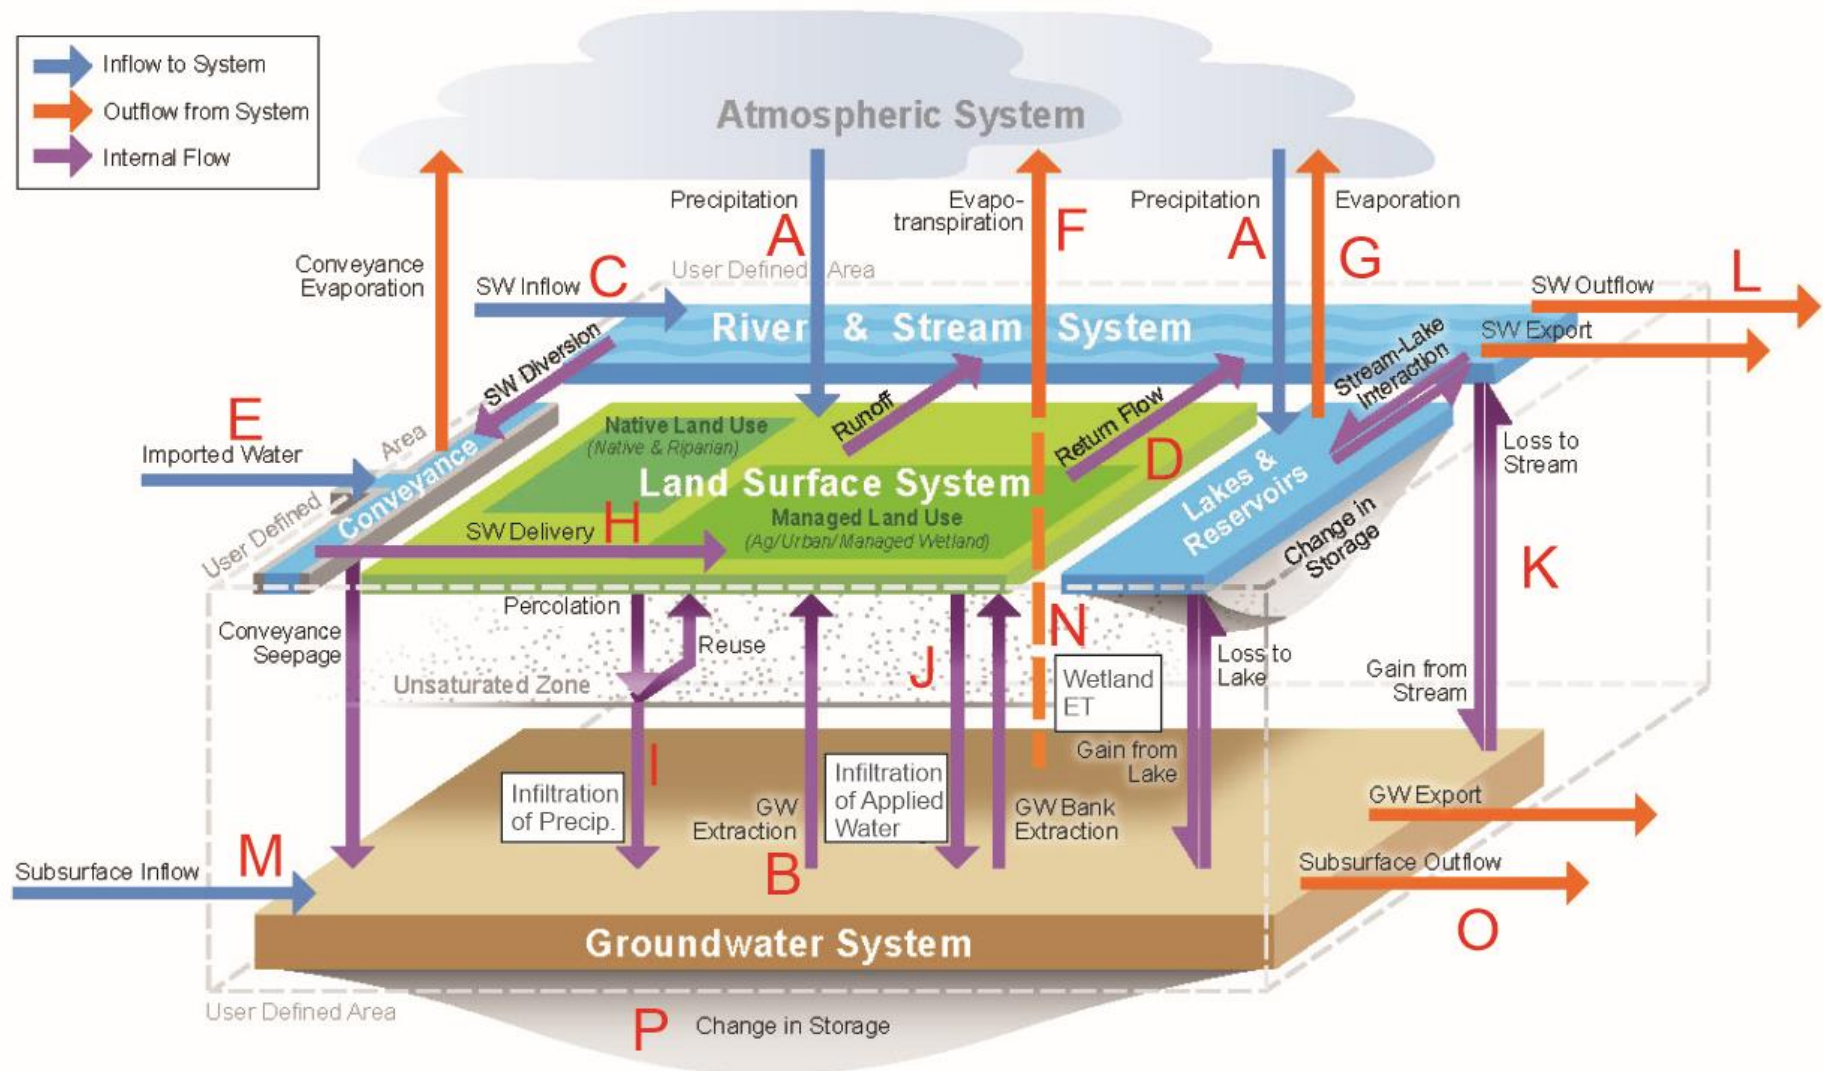


Figure 6-2: Components of the Water Budget. Source: Modified from Department of Water Resources (Water Budget BMP, 2016)

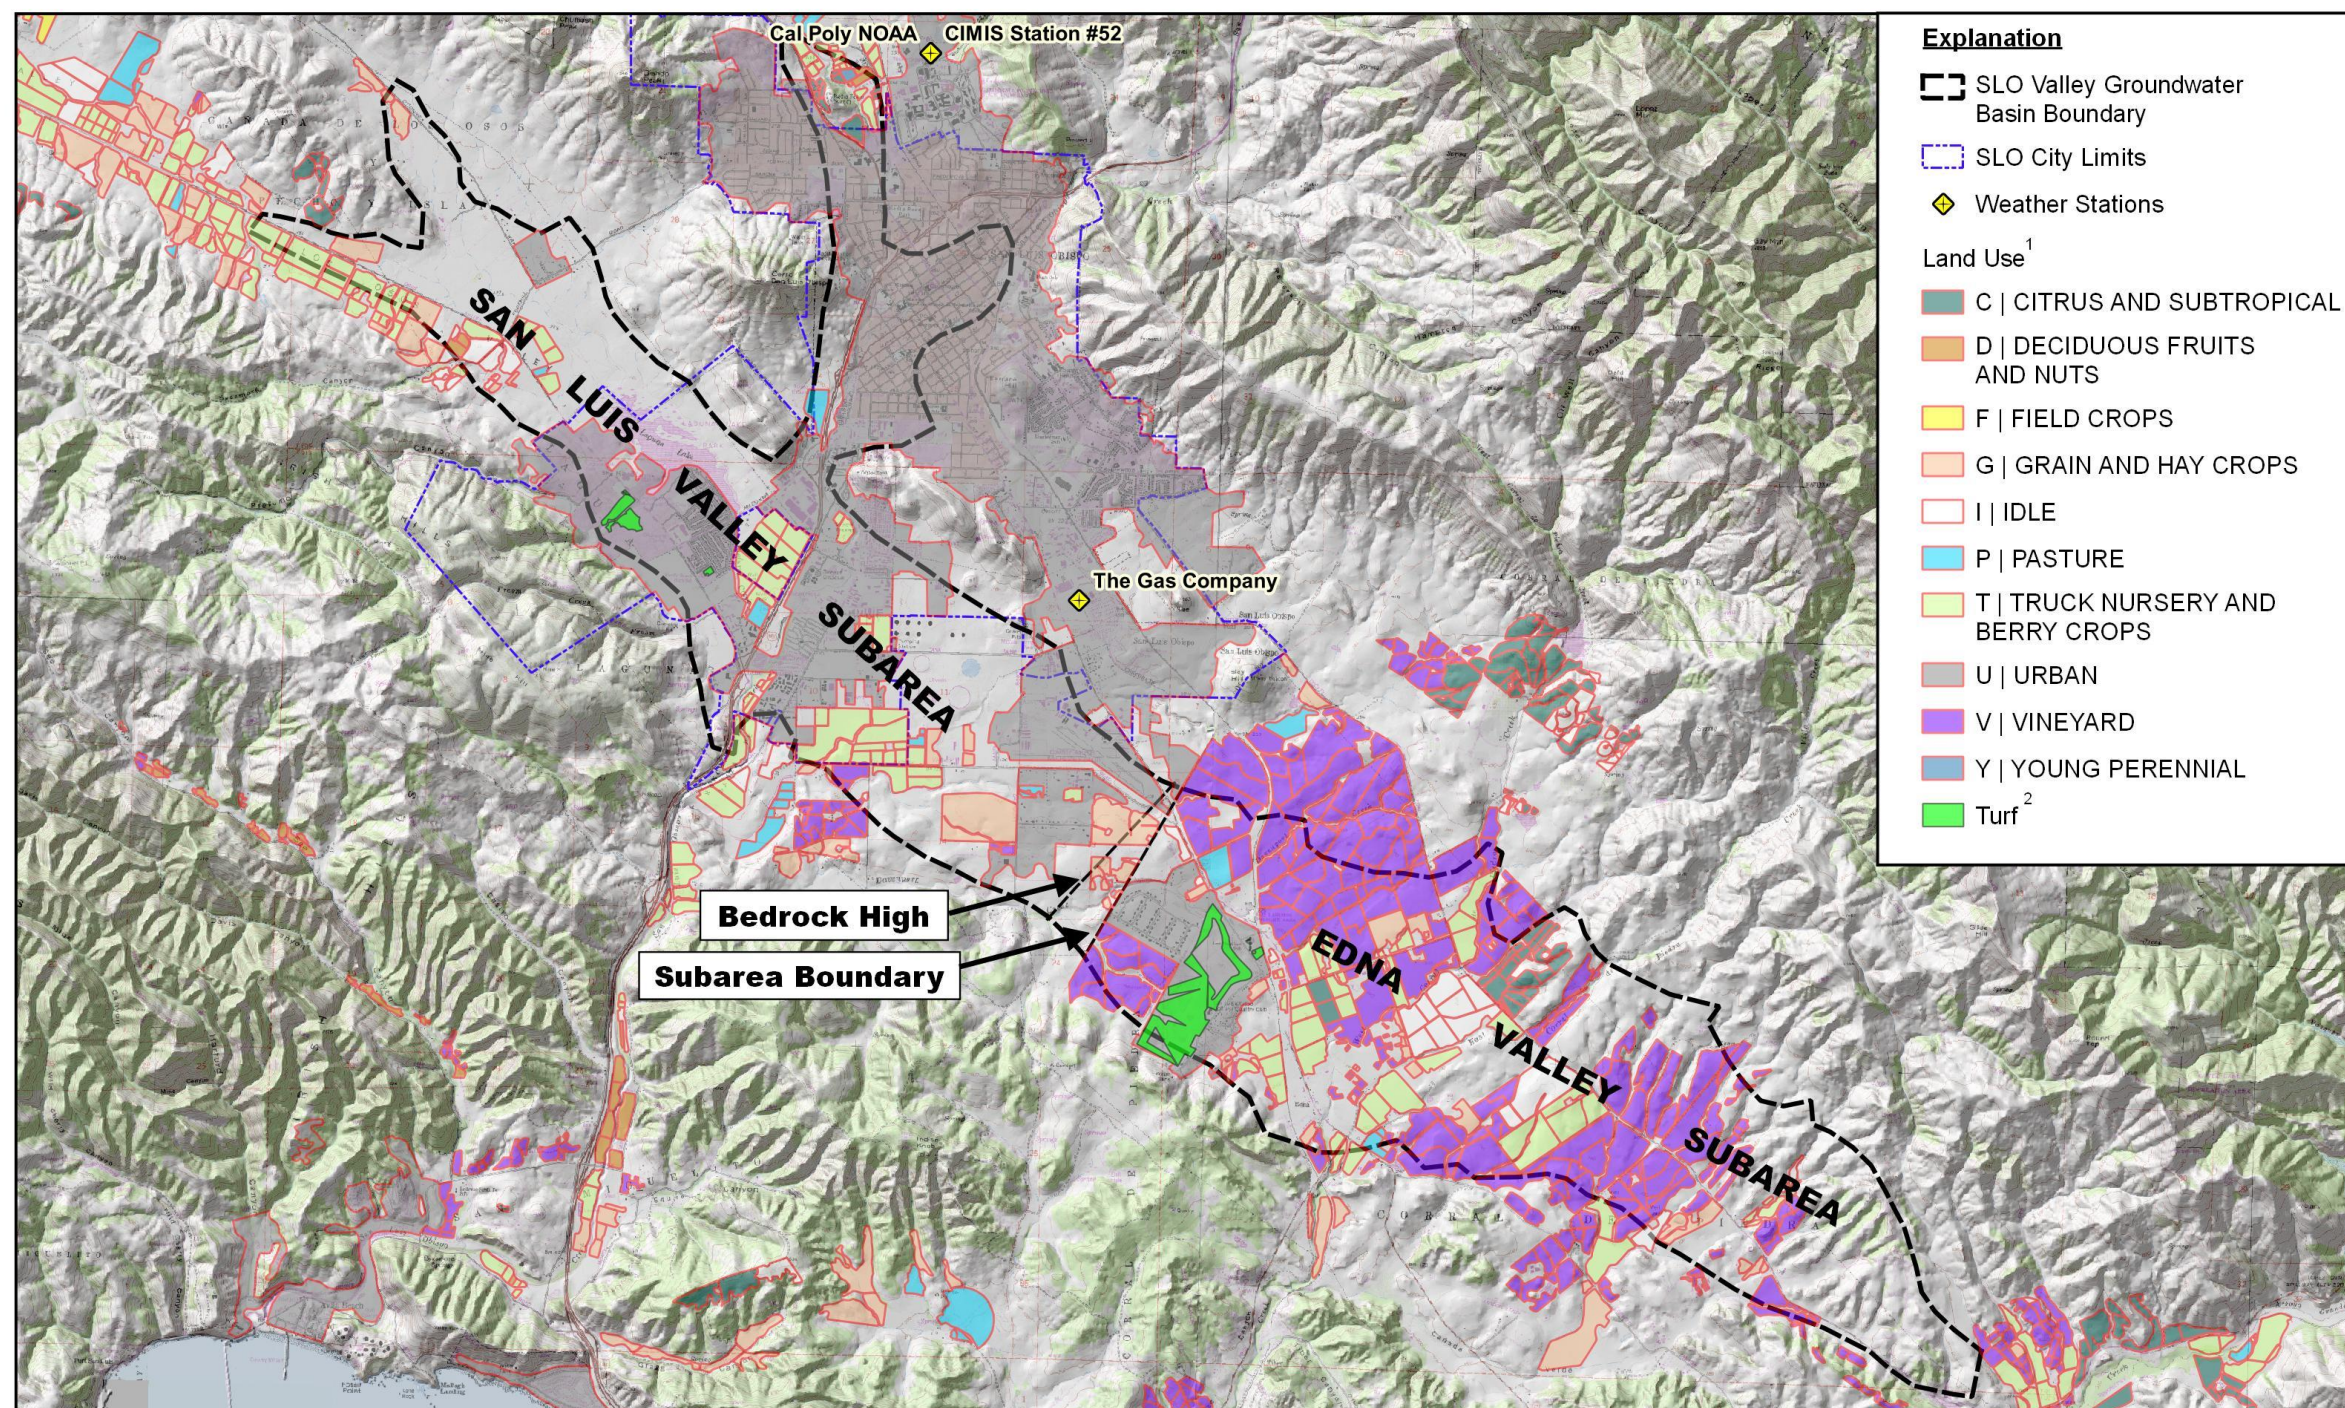

Prepared For:  

  
 Author: TK  
 Date: 06/25/2020  
 SAN LUIS OBISPO VALLEY BASIN GSP



**References:**

- Coordinate System: State Plane California V FIPS 0405 Feet
- Projection: Lambert Conformal Conic
- Horizontal Datum: NAD 83
- Vertical Datum: NAVD 88
- Basemap: USGS 7.5' Topographic Map

**Notes:**

- Land use designations from DWR (2016), data obtained from gis.water.ca.gov
- Turf area not included in DWR (2016) dataset
- Not all crops shown on figure are applicable to SLO Valley Groundwater Basin

Water Budget Subareas

Figure 6-3

As presented in Chapter 4, there is a topographic high point in bedrock elevations underlying the Basin that creates a bedrock high between the San Luis Valley and Edna Valley subareas (Figure 4-4). This bedrock high partially isolates the deeper portions of the Basin aquifers (Figure 4-5) and restricts underflow between the two subareas. Figure 6-3 shows the San Luis Valley and Edna Valley subareas used for the water budget, with the subarea boundary located along Hidden Springs Road. Note that the boundary between the subareas is shifted slightly to the west of the bedrock high (Figure 6-3) in order to better correlate with overlying land use. Land use for 2016 (DWR, 2016) is shown on the map to help illustrate differences across the subarea boundary. Immediately west of the subarea boundary is rural residential land and the County airport. To the east of the subarea boundary are residential subdivisions, a golf course, and irrigated agricultural lands. The two subareas of the Basin are hydrologically distinct, as evidenced by the differences in watershed area (Figure 3-10), sediment thickness (Figure 4-4), and water level hydrographs (Figure 5-11). The groundwater budgets are also very different between the subareas, and separating the two is necessary to properly characterize the Basin. The two subarea water budgets have also been combined to create a total Basin water budget.

The San Luis Valley subarea is 6,773 acres (10.6 square miles), and the Edna Valley subarea is 5,948 acres (9.3 square miles), with a total Basin area of 12,721 acres (19.2 square miles). The San Luis Valley subarea receives surface inflow from a watershed of 28,823 acres (45 square miles) and the Edna Valley subarea receives surface inflow from a watershed of 10,145 acres (15.9 square miles). The watershed divide between San Luis Obispo Creek and Pismo Creek is not coincident with the bedrock high or subarea boundary, and watershed area draining to Davenport Creek in the Edna Valley subarea is part of the San Luis Obispo Creek watershed (Figure 3-10; Chapter 3).

Table 6-1, Table 6-2, and Table 6-3 present the historical surface water and groundwater budgets for the San Luis Valley subarea, the Edna Valley subarea, and the Basin total, respectively. Bar graphs are included in Figure 6-4 through Figure 6-9. The three main water budget tables contain a detailed accounting of the water budget for the Basin and will be referred to throughout this chapter. A letter key has been added to provide a visual reference with Figure 6-3.

Note that Figure 6-3 breaks the water budget into four components (atmospheric system, land surface system, river & stream system, and groundwater system). The atmospheric system transfers evaporation to precipitation and overlies the other systems. The land surface system is the portion of the water budget that includes land surface and the unsaturated zone extending to the top of the groundwater system. The rivers & streams system is the portion of the water budget that includes rivers, streams, conveyance facilities and diversion ditches, and lakes and reservoirs. The atmospheric, land surface, and river & streams water budgets for this Basins have been combined into a single surface water budget. As a result, not all the components in Figure 6-3 have corresponding budget items listed for the Basin. For example, the runoff and return flow components of the land surface system into the river & stream system in Figure 6-3 are part of the surface water outflow component (Labeled "L").

The six bar graphs are graphical representations of the water budget that allow quick comparisons of the various budget quantities, but are not individually referenced. Figure 6-4, Figure 6-5, and Figure 6-6 illustrate the surface water budget portions of Table 6-1, Table 6-2, and Table 6-3, while Figure 6-7, Figure 6-8, and Figure 6-9 illustrate the groundwater budget portions of the tables. Water budget climate, historical time period, methodology, sustainable yield, and overdraft interpretation are also presented in this chapter.

Some general observations on the water budget are worth noting. First, the surface water budget for the two subareas shows similar patterns of increasing and decreasing total flow from year to year, which is expected given similar precipitation with somewhat proportional stream flow. The San Luis Valley subarea

surface water budget is close to double the Edna Valley surface water budget, however. This is due to a larger watershed area for the San Luis Valley subarea and to the significant volume of surface water imported by the City of San Luis Obispo. Secondly, the groundwater budget for the Edna Valley subarea shows high groundwater recharge events during all wet years, which is expected, while the San Luis Obispo shows a more attenuated response, with some wet years (1993, 2017) providing greater recharge than others. This is because during some wet years, the aquifers in the San Luis Valley subarea fill up to the point where there is no more available storage volume, and therefore no additional recharge occurs (also inferred by the relatively flat water level hydrographs in Figure 5-11). In 1993 and 2017, there was sufficient storage room following drought to allow greater recharge than during other wet years when the subarea was effectively full.

Table 6-1: Historical Water Budget - San Luis Valley Subarea.

Water Year	SURFACE WATER INFLOW (AF)							SURFACE WATER OUTFLOW (AF)									GROUNDWATER INFLOW (AF)					GROUNDWATER OUTFLOW (AF)					Change in GW Storage (AF)			
	Precipitation	GW extractions (Urban)	GW extractions (Ag)	Stream Inflow	Wastewater discharge	Local Imported Supplies	TOTAL IN	ET of Precipitation	ET of Applied Water (Urban)	ET of Applied Water (Ag)	Wetland/Lake Riparian ET	Surface Water delivery offset	Infiltration of Precipitation	Infil. of Applied Water (Urban)	Infil. of Applied Water (Ag)	GW-SW interaction	Stream outflow	TOTAL OUT	Infiltration of Precipitation	Infil. of Applied Water (Urban)	Infil. of Applied Water (Ag)	GW-SW interaction	Subsurface Inflow	TOTAL IN	GW Extractions (Urban)	GW Extractions (Ag)		Wetland direct ET	Subsurface Outflow	TOTAL OUT
KEY	A	B	B	C	D	E		F	F	F	F/G	H	I	J	J	K	L		I	J	J	K	M		B	B	N	O		P
1987	7,720	410	1,300	6,410	5,520	8,490	29,850	7,450	2,850	1,050	740	5,520	220	530	260	1,090	10,150	29,860	220	530	260	1,090	340	2,440	410	1,300	1,050	120	2,880	-440
1988	10,080	430	1,750	9,660	5,320	8,180	35,420	8,540	2,780	1,410	780	5,320	1,260	520	350	1,640	12,840	35,440	1,260	520	350	1,640	340	4,110	430	1,750	1,320	120	3,620	490
1989	7,850	660	1,580	3,600	4,070	6,020	23,780	7,550	2,180	1,270	380	4,070	250	430	310	610	6,730	23,780	250	430	310	610	340	1,940	660	1,580	1,130	120	3,490	-1,550
1990	6,790	2,180	1,850	2,140	1,970	1,280	16,210	6,660	1,200	1,490	410	1,970	110	290	370	360	3,360	16,220	110	290	370	360	340	1,470	2,180	1,850	1,250	120	5,400	-3,930
1991	9,450	2,350	1,790	5,790	2,520	1,960	23,860	8,250	1,460	1,440	380	2,520	980	320	350	980	7,160	23,840	980	320	350	980	340	2,970	2,350	1,790	1,190	120	5,450	-2,480
1992	11,250	2,240	1,820	11,250	3,070	2,910	32,540	8,590	1,720	1,460	700	3,070	2,200	360	360	1,910	12,160	32,530	2,200	360	360	1,910	340	5,170	2,240	1,820	1,090	120	5,270	-100
1993	15,700	1,030	1,790	17,350	3,630	4,980	44,480	8,640	1,980	1,440	660	3,630	5,950	400	350	1,210	20,210	44,470	5,950	400	350	1,210	340	8,250	1,030	1,790	1,190	120	4,130	4,120
1994	8,620	790	1,690	7,640	3,750	5,400	27,890	7,900	2,030	1,360	740	3,750	580	410	330	1,300	9,480	27,880	580	410	330	1,300	340	2,960	790	1,690	1,090	120	3,690	-730
1995	16,930	660	1,870	26,690	3,780	5,590	55,520	8,630	2,060	1,500	540	3,780	6,070	410	370	1,870	30,300	55,530	6,070	410	370	1,870	340	9,060	660	1,870	1,110	120	3,760	5,300
1996	11,740	740	1,910	11,930	4,210	6,160	36,690	8,530	2,250	1,530	680	4,210	1,820	440	380	830	16,010	36,680	1,820	440	380	830	340	3,810	740	1,910	1,040	120	3,810	0
1997	15,930	780	2,280	17,670	4,400	6,440	47,500	8,580	2,370	1,830	690	4,400	2,690	460	450	530	25,510	47,510	2,690	460	450	530	340	4,470	780	2,280	1,290	120	4,470	0
1998	16,930	680	1,870	26,460	4,150	6,130	56,220	8,580	2,230	1,500	520	4,150	1,770	440	370	790	35,880	56,230	1,770	440	370	790	340	3,710	680	1,870	1,040	120	3,710	0
1999	8,670	660	2,510	7,720	4,350	6,470	30,380	7,870	2,340	2,020	810	4,350	650	450	500	1,310	10,100	30,400	650	450	500	1,310	340	3,250	660	2,510	1,330	120	4,620	-1,370
2000	12,620	670	1,810	13,130	4,410	6,560	39,200	8,530	2,360	1,450	670	4,410	2,950	450	360	920	17,090	39,190	2,950	450	360	920	340	5,020	670	1,810	1,040	120	3,640	1,380
2001	12,470	710	1,740	12,920	4,250	6,270	38,360	8,570	2,290	1,400	670	4,250	1,590	440	340	900	17,900	38,350	1,590	440	340	900	340	3,610	710	1,740	1,040	120	3,610	0
2002	7,510	630	1,850	6,130	4,530	6,340	26,990	7,240	2,000	1,490	770	4,530	220	440	360	1,040	8,900	26,990	220	440	360	1,040	340	2,400	630	1,850	1,140	120	3,740	-1,340
2003	11,630	610	1,470	11,780	4,610	6,300	36,400	8,640	1,860	1,180	680	4,610	2,490	440	290	820	15,390	36,400	2,490	440	290	820	340	4,380	610	1,470	1,040	120	3,240	1,140
2004	8,140	620	1,500	6,990	4,340	6,740	28,330	7,780	2,560	1,200	760	4,340	300	460	290	1,190	9,450	28,330	300	460	290	1,190	340	2,580	620	1,500	1,140	120	3,380	-800
2005	15,120	620	1,370	16,560	5,390	6,250	45,310	8,720	1,040	1,100	600	5,390	1,850	440	270	1,160	24,730	45,300	1,850	440	270	1,160	340	4,060	620	1,370	950	120	3,060	1,000
2006	13,180	610	1,280	6,500	4,950	6,280	32,800	8,710	1,500	1,030	660	4,950	1,580	440	250	450	13,220	32,790	1,580	440	250	450	340	3,060	610	1,280	1,050	120	3,060	0
2007	4,340	610	1,510	6,140	4,200	6,840	23,640	4,330	2,770	1,210	840	4,200	0	480	290	1,040	8,440	23,600	0	480	290	1,040	340	2,150	610	1,510	1,250	120	3,490	-1,340
2008	7,800	520	1,550	11,030	4,010	6,730	31,640	7,540	2,770	1,250	790	4,010	210	470	300	1,870	12,410	31,620	210	470	300	1,870	340	3,190	520	1,550	1,260	120	3,450	-260
2009	5,890	560	1,430	7,670	3,930	6,580	26,060	5,840	2,740	1,150	790	3,930	40	480	280	1,300	9,500	26,050	40	480	280	1,300	340	2,440	560	1,430	1,140	120	3,250	-810
2010	11,980	580	1,160	22,860	4,160	5,860	46,600	8,680	1,850	940	650	4,160	2,590	450	220	1,600	25,460	46,600	2,590	450	220	1,600	340	5,200	580	1,160	960	120	2,820	2,380
2011	16,930	530	1,260	21,360	4,480	5,530	50,090	8,750	1,170	1,020	610	4,480	1,400	430	240	640	31,350	50,090	1,400	430	240	640	340	3,050	530	1,260	1,150	120	3,060	-10
2012	8,470	530	1,420	5,430	3,950	5,770	25,570	7,940	1,910	1,150	770	3,950	430	450	270	920	7,770	25,560	430	450	270	920	340	2,410	530	1,420	1,200	120	3,270	-860
2013	5,290	510	1,790	3,670	4,060	6,330	21,650	5,260	2,320	1,450	430	4,060	30	470	340	620	6,670	21,650	30	470	340	620	340	1,800	510	1,790	1,350	120	3,770	-1,970
2014	5,220	540	1,560	3,270	3,660	6,190	20,440	5,190	2,620	1,260	420	3,660	20	470	300	560	5,940	20,440	20	470	300	560	340	1,690	540	1,560	1,290	120	3,510	-1,820
2015	5,960	400	1,680	1,620	3,420	5,750	18,830	5,900	2,300	1,360	410	3,420	50	440	330	270	4,340	18,820	50	440	330	270	340	1,430	400	1,680	1,270	120	3,470	-2,040
2016	10,150	400	1,690	4,850	3,550	5,490	26,130	8,490	1,920	1,360	730	3,550	1,350	430	330	820	7,130	26,110	1,350	430	330	820	340	3,270	400	1,690	1,170	120	3,380	-110
2017	16,930	400	1,550	18,450	4,400	5,370	47,100	8,730	960	1,250	590	4,400	6,910	440	300	550	22,970	47,100	6,910	440	300	550	340	8,540	400	1,550	1,260	120	3,330	5,210
2018	6,980	400	1,190	2,630	3,330	5,790	20,320	6,870	2,430	970	800	3,330	90	450	230	180	4,970	20,320	90	450	230	180	340	1,290	400	1,190	1,270	120	2,980	-1,690
2019	15,040	400	1,030	16,360	4,360	5,080	42,270	8,800	720	830	630	4,360	4,430	420	200	490	21,400	42,280	4,430	420	200	490	340	5,880	400	1,030	1,070	120	2,620	3,260

Type Year: Dry / Below Normal / Above Normal /

Wet

AF = Acre-Feet; KEY = Referenced Components on Figure 6-3

Table 6-2: Historical Water Budget - Edna Valley Subarea.

Water Year	SURFACE WATER INFLOW (AF)					SURFACE WATER OUTFLOW (AF)										GROUNDWATER INFLOW (AF)					GROUNDWATER OUTFLOW (AF)				Change in GW Storage (AF)	
	Precipitation	GW extractions (Urban)	GW extractions (Ag)	Stream Inflow	TOTAL IN	ET of Precipitation	ET of Applied Water (Urban)	ET of Applied Water (Ag)	Riparian ET	Infiltration of Precipitation	Infiltr. of Applied Water (Urban)	Infiltr. of Applied Water (Ag)	GW-SW interaction	Stream outflow	TOTAL OUT	Infiltration of Precipitation	Infiltr. of Applied Water (Urban)	Infiltr. of Applied Water (Ag)	GW-SW interaction	Subsurface Inflow	TOTAL IN	GW Extractions (Urban)	GW Extractions (Ag)	Subsurface Outflow		TOTAL OUT
KEY	A	B	B	C		F	F	F	F	I	J	J	K	L		I	J	J	K	M		B	B	O		P
1987	6,780	630	2,450	2,150	12,010	6,610	450	2,000	40	140	190	440	300	1,840	12,010	140	190	440	300	110	1,180	630	2,450	100	3,180	-2,000
1988	8,860	760	2,750	3,240	15,610	7,970	560	2,240	40	660	210	510	450	2,960	15,600	660	210	510	450	110	1,940	760	2,750	100	3,610	-1,670
1989	6,900	640	2,670	1,210	11,420	6,670	470	2,190	20	180	180	480	170	1,070	11,430	180	180	480	170	110	1,120	640	2,670	100	3,410	-2,290
1990	5,960	740	3,040	730	10,470	5,860	530	2,490	20	90	220	550	100	620	10,480	90	220	550	100	110	1,070	740	3,040	100	3,880	-2,810
1991	8,300	760	2,810	1,940	13,810	7,550	530	2,300	20	570	240	510	270	1,840	13,830	570	240	510	270	110	1,700	760	2,810	100	3,670	-1,970
1992	9,880	790	2,810	3,770	17,250	8,030	530	2,300	40	1,460	270	510	530	3,590	17,260	1,460	270	510	530	110	2,880	790	2,810	100	3,700	-820
1993	13,780	840	2,710	5,810	23,140	8,000	570	2,220	40	4,800	290	490	810	5,940	23,160	4,800	290	490	810	110	6,500	840	2,710	100	3,650	2,850
1994	7,570	760	2,640	2,560	13,530	7,050	500	2,170	40	400	270	470	360	2,280	13,540	400	270	470	360	110	1,610	760	2,640	100	3,500	-1,890
1995	14,870	820	2,820	8,930	27,440	7,930	550	2,320	40	5,740	280	500	1,250	8,840	27,450	5,740	280	500	1,250	110	7,880	820	2,820	100	3,740	4,140
1996	10,310	850	3,000	3,990	18,150	7,880	550	2,470	40	1,920	310	530	560	3,900	18,160	1,920	310	530	560	110	3,430	850	3,000	100	3,950	-520
1997	13,990	1,030	3,460	5,910	24,390	7,840	690	2,850	40	5,010	350	610	830	6,190	24,410	5,010	350	610	830	110	6,910	1,030	3,460	100	4,590	2,320
1998	14,870	860	3,000	9,730	28,460	7,790	570	2,480	40	5,750	300	520	1,360	9,660	28,470	5,750	300	520	1,360	110	8,040	860	3,000	100	3,960	4,080
1999	7,620	1,020	3,720	2,590	14,950	6,990	690	3,070	40	470	340	650	360	2,340	14,950	470	340	650	360	110	1,930	1,020	3,720	100	4,840	-2,910
2000	11,080	940	2,700	4,400	19,120	7,710	600	2,230	40	2,650	350	480	620	4,470	19,150	2,650	350	480	620	110	4,210	940	2,700	100	3,740	470
2001	10,950	980	3,320	4,330	19,580	7,670	630	2,750	40	2,550	360	570	610	4,400	19,580	2,550	360	570	610	110	4,200	980	3,320	100	4,400	-200
2002	6,600	960	3,220	2,060	12,840	6,400	630	2,660	40	170	340	570	290	1,760	12,860	170	340	570	290	110	1,480	960	3,220	100	4,280	-2,800
2003	10,220	870	3,030	3,950	18,070	7,600	570	2,500	40	2,000	320	520	550	3,970	18,070	2,000	320	520	550	110	3,500	870	3,030	100	4,000	-500
2004	7,150	970	3,040	2,340	13,500	6,740	630	2,520	40	320	350	530	330	2,070	13,530	320	350	530	330	110	1,640	970	3,040	100	4,110	-2,470
2005	13,280	840	2,870	5,540	22,530	7,610	550	2,370	40	4,450	300	500	780	5,930	22,530	4,450	300	500	780	110	6,140	840	2,870	100	3,810	2,330
2006	11,570	900	3,040	2,180	17,690	7,580	590	2,520	40	3,100	320	530	310	2,730	17,720	3,100	320	530	310	110	4,370	900	3,040	100	4,040	330
2007	3,810	1,180	3,830	2,160	10,980	3,800	770	3,170	40	0	430	660	300	1,820	10,990	0	430	660	300	110	1,500	1,180	3,830	100	5,110	-3,610
2008	6,850	1,210	3,750	3,750	15,560	6,580	780	3,100	40	220	440	650	520	3,230	15,560	220	440	650	520	110	1,940	1,210	3,750	100	5,060	-3,120
2009	5,170	950	3,660	2,740	12,520	5,100	650	3,040	40	50	310	620	380	2,330	12,520	50	310	620	380	110	1,470	950	3,660	100	4,710	-3,240
2010	10,520	820	3,360	7,490	22,190	7,560	550	2,790	40	2,260	270	570	1,050	7,100	22,190	2,260	270	570	1,050	110	4,260	820	3,360	100	4,280	-20
2011	14,870	840	3,330	7,840	26,880	7,550	580	2,760	40	5,760	270	570	1,100	8,260	26,890	5,760	270	570	1,100	110	7,810	840	3,330	100	4,270	3,540
2012	7,440	940	3,560	1,810	13,750	6,830	650	2,950	40	450	290	610	250	1,660	13,730	450	290	610	250	110	1,710	940	3,560	100	4,600	-2,890
2013	4,640	1,040	3,780	1,260	10,720	4,600	740	3,120	20	40	310	660	180	1,070	10,740	40	310	660	180	110	1,300	1,040	3,780	100	4,920	-3,620
2014	4,590	960	3,580	1,120	10,250	4,550	680	2,960	20	30	280	620	160	950	10,250	30	280	620	160	110	1,200	960	3,580	100	4,640	-3,440
2015	5,230	880	4,230	490	10,830	5,160	650	3,500	20	60	230	720	70	410	10,820	60	230	720	70	110	1,190	880	4,230	100	5,210	-4,020
2016	8,920	790	3,200	1,560	14,470	7,550	580	2,680	40	980	220	530	220	1,680	14,480	980	220	530	220	110	2,060	790	3,200	100	4,090	-2,030
2017	14,870	850	3,640	6,240	25,600	7,570	640	3,030	40	5,730	220	610	870	6,890	25,600	5,730	220	610	870	110	7,540	850	3,640	100	4,590	2,950
2018	6,130	880	3,550	650	11,210	6,020	650	2,960	40	90	240	590	90	540	11,220	90	240	590	90	110	1,120	880	3,550	100	4,530	-3,410
2019	13,210	770	3,350	5,480	22,810	7,630	580	2,800	40	4,370	210	550	770	5,870	22,820	4,370	210	550	770	110	6,010	770	3,350	100	4,220	1,790

Type Year: Dry / Below Normal / Above Normal / Wet

AF = Acre-Feet; KEY = Referenced Components on Figure 6-3

Table 6-3: Historical Water Budget - San Luis Obispo Valley Groundwater Basin.

Water Year	SURFACE WATER INFLOW (GW)							SURFACE WATER OUTFLOW (GW)										GROUNDWATER INFLOW (GW)					GROUNDWATER OUTFLOW (GW)					Change in GW Storage (AF)		
	Precipitation	GW extractions (Urban)	GW extractions (Ag)	Stream Inflow	Wastewater discharge	Local Imported Supplies	TOTAL IN	ET of Precipitation	ET of Applied Water (Urban)	ET of Applied Water (Ag)	Wetland/Lake Riparian ET	Surface Water deliveries	Infiltration of Precipitation	Infilt. of Applied Water (Urban)	Infilt. of Applied Water (Ag)	GW-SW interaction	Stream outflow	TOTAL OUT	Infiltration of Precipitation	Infilt. of Applied Water (Urban)	Infilt. of Applied Water (Ag)	GW-SW interaction	Subsurface Inflow	TOTAL IN	GW Extractions (Urban)	GW Extractions (Ag)	Wetland direct ET		Subsurface Outflow	TOTAL OUT
KEY	A	B	B	C	D	E		F	F	F	F/G	H	I	J	J	K	L		I	J	J	K	M		B	B	N	O		P
1987	14,500	1,040	3,750	8,560	5,520	8,490	41,860	14,060	3,300	3,050	780	5,520	360	720	700	1,390	11,990	41,870	360	720	700	1,390	450	3,620	1,040	3,750	1,050	220	6,060	-2,440
1988	18,940	1,190	4,500	12,900	5,320	8,180	51,030	16,510	3,340	3,650	820	5,320	1,920	730	860	2,090	15,800	51,040	1,920	730	860	2,090	450	6,050	1,190	4,500	1,320	220	7,230	-1,180
1989	14,750	1,300	4,250	4,810	4,070	6,020	35,200	14,220	2,650	3,460	400	4,070	430	610	790	780	7,800	35,210	430	610	790	780	450	3,060	1,300	4,250	1,130	220	6,900	-3,840
1990	12,750	2,920	4,890	2,870	1,970	1,280	26,680	12,520	1,730	3,980	430	1,970	200	510	920	460	3,980	26,700	200	510	920	460	450	2,540	2,920	4,890	1,250	220	9,280	-6,740
1991	17,750	3,110	4,600	7,730	2,520	1,960	37,670	15,800	1,990	3,740	400	2,520	1,550	560	860	1,250	9,000	37,670	1,550	560	860	1,250	450	4,670	3,110	4,600	1,190	220	9,120	-4,450
1992	21,130	3,030	4,630	15,020	3,070	2,910	49,790	16,620	2,250	3,760	740	3,070	3,660	630	870	2,440	15,750	49,790	3,660	630	870	2,440	450	8,050	3,030	4,630	1,090	220	8,970	-920
1993	29,480	1,870	4,500	23,160	3,630	4,980	67,620	16,640	2,550	3,660	700	3,630	10,750	690	840	2,020	26,150	67,630	10,750	690	840	2,020	450	14,750	1,870	4,500	1,190	220	7,780	6,970
1994	16,190	1,550	4,330	10,200	3,750	5,400	41,420	14,950	2,530	3,530	780	3,750	980	680	800	1,660	11,760	41,420	980	680	800	1,660	450	4,570	1,550	4,330	1,090	220	7,190	-2,620
1995	31,800	1,480	4,690	35,620	3,780	5,590	82,960	16,560	2,610	3,820	580	3,780	11,810	690	870	3,120	39,140	82,980	11,810	690	870	3,120	450	16,940	1,480	4,690	1,110	220	7,500	9,440
1996	22,050	1,590	4,910	15,920	4,210	6,160	54,840	16,410	2,800	4,000	720	4,210	3,740	750	910	1,390	19,910	54,840	3,740	750	910	1,390	450	7,240	1,590	4,910	1,040	220	7,760	-520
1997	29,920	1,810	5,740	23,580	4,400	6,440	71,890	16,420	3,060	4,680	730	4,400	7,700	810	1,060	1,360	31,700	71,920	7,700	810	1,060	1,360	450	11,380	1,810	5,740	1,290	220	9,060	2,320
1998	31,800	1,540	4,870	36,190	4,150	6,130	84,680	16,370	2,800	3,980	560	4,150	7,520	740	890	2,150	45,540	84,700	7,520	740	890	2,150	450	11,750	1,540	4,870	1,040	220	7,670	4,080
1999	16,290	1,680	6,230	10,310	4,350	6,470	45,330	14,860	3,030	5,090	850	4,350	1,120	790	1,150	1,670	12,440	45,350	1,120	790	1,150	1,670	450	5,180	1,680	6,230	1,330	220	9,460	-4,280
2000	23,700	1,610	4,510	17,530	4,410	6,560	58,320	16,240	2,960	3,680	710	4,410	5,600	800	840	1,540	21,560	58,340	5,600	800	840	1,540	450	9,230	1,610	4,510	1,040	220	7,380	1,850
2001	23,420	1,690	5,060	17,250	4,250	6,270	57,940	16,240	2,920	4,150	710	4,250	4,140	800	910	1,510	22,300	57,930	4,140	800	910	1,510	450	7,810	1,690	5,060	1,040	220	8,010	-200
2002	14,110	1,590	5,070	8,190	4,530	6,340	39,830	13,640	2,630	4,150	810	4,530	390	780	930	1,330	10,660	39,850	390	780	930	1,330	450	3,880	1,590	5,070	1,140	220	8,020	-4,140
2003	21,850	1,480	4,500	15,730	4,610	6,300	54,470	16,240	2,430	3,680	720	4,610	4,490	760	810	1,370	19,360	54,470	4,490	760	810	1,370	450	7,880	1,480	4,500	1,040	220	7,240	640
2004	15,290	1,590	4,540	9,330	4,340	6,740	41,830	14,520	3,190	3,720	800	4,340	620	810	820	1,520	11,520	41,860	620	810	820	1,520	450	4,220	1,590	4,540	1,140	220	7,490	-3,270
2005	28,400	1,460	4,240	22,100	5,390	6,250	67,840	16,330	1,590	3,470	640	5,390	6,300	740	770	1,940	30,660	67,830	6,300	740	770	1,940	450	10,200	1,460	4,240	950	220	6,870	3,330
2006	24,750	1,510	4,320	8,680	4,950	6,280	50,490	16,290	2,090	3,550	700	4,950	4,680	760	780	760	15,950	50,510	4,680	760	780	760	450	7,430	1,510	4,320	1,050	220	7,100	330
2007	8,150	1,790	5,340	8,300	4,200	6,840	34,620	8,130	3,540	4,380	880	4,200	0	910	950	1,340	10,260	34,590	0	910	950	1,340	450	3,650	1,790	5,340	1,250	220	8,600	-4,950
2008	14,650	1,730	5,300	14,780	4,010	6,730	47,200	14,120	3,550	4,350	830	4,010	430	910	950	2,390	15,640	47,180	430	910	950	2,390	450	5,130	1,730	5,300	1,260	220	8,510	-3,380
2009	11,060	1,510	5,090	10,410	3,930	6,580	38,580	10,940	3,390	4,190	830	3,930	90	790	900	1,680	11,830	38,570	90	790	900	1,680	450	3,910	1,510	5,090	1,140	220	7,960	-4,050
2010	22,500	1,400	4,520	30,350	4,160	5,860	68,790	16,240	2,400	3,730	690	4,160	4,850	720	790	2,650	32,560	68,790	4,850	720	790	2,650	450	9,460	1,400	4,520	960	220	7,100	2,360
2011	31,800	1,370	4,590	29,200	4,480	5,530	76,970	16,300	1,750	3,780	650	4,480	7,160	700	810	1,740	39,610	76,980	7,160	700	810	1,740	450	10,860	1,370	4,590	1,150	220	7,330	3,530
2012	15,910	1,470	4,980	7,240	3,950	5,770	39,320	14,770	2,560	4,100	810	3,950	880	740	880	1,170	9,430	39,290	880	740	880	1,170	450	4,120	1,470	4,980	1,200	220	7,870	-3,750
2013	9,930	1,550	5,570	4,930	4,060	6,330	32,370	9,860	3,060	4,570	450	4,060	70	780	1,000	800	7,740	32,390	70	780	1,000	800	450	3,100	1,550	5,570	1,350	220	8,690	-5,590
2014	9,810	1,500	5,140	4,390	3,660	6,190	30,690	9,740	3,300	4,220	440	3,660	50	750	920	720	6,890	30,690	50	750	920	720	450	2,890	1,500	5,140	1,290	220	8,150	-5,260
2015	11,190	1,280	5,910	2,110	3,420	5,750	29,660	11,060	2,950	4,860	430	3,420	110	670	1,050	340	4,750	29,640	110	670	1,050	340	450	2,620	1,280	5,910	1,270	220	8,680	-6,060
2016	19,070	1,190	4,890	6,410	3,550	5,490	40,600	16,040	2,500	4,040	770	3,550	2,330	650	860	1,040	8,810	40,590	2,330	650	860	1,040	450	5,330	1,190	4,890	1,170	220	7,470	-2,140
2017	31,800	1,250	5,190	24,690	4,400	5,370	72,700	16,300	1,600	4,280	630	4,400	12,640	660	910	1,420	29,860	72,700	12,640	660	910	1,420	450	16,080	1,250	5,190	1,260	220	7,920	8,160
2018	13,110	1,280	4,740	3,280	3,330	5,790	31,530	12,890	3,080	3,930	840	3,330	180	690	820	270	5,510	31,540	180	690	820	270	450	2,410	1,280	4,740	1,270	220	7,510	-5,100
2019	28,250	1,170	4,380	21,840	4,360	5,080	65,080	16,430	1,300	3,630	670	4,360	8,800	630	750	1,260	27,270	65,100	8,800	630	750	1,260	450	11,890	1,170	4,380	1,070	220	6,840	5,050

Type Year: Dry / Below Normal / Above Normal / Wet  
AF = Acre-Feet; KEY = Referenced Components on Figure 6-3

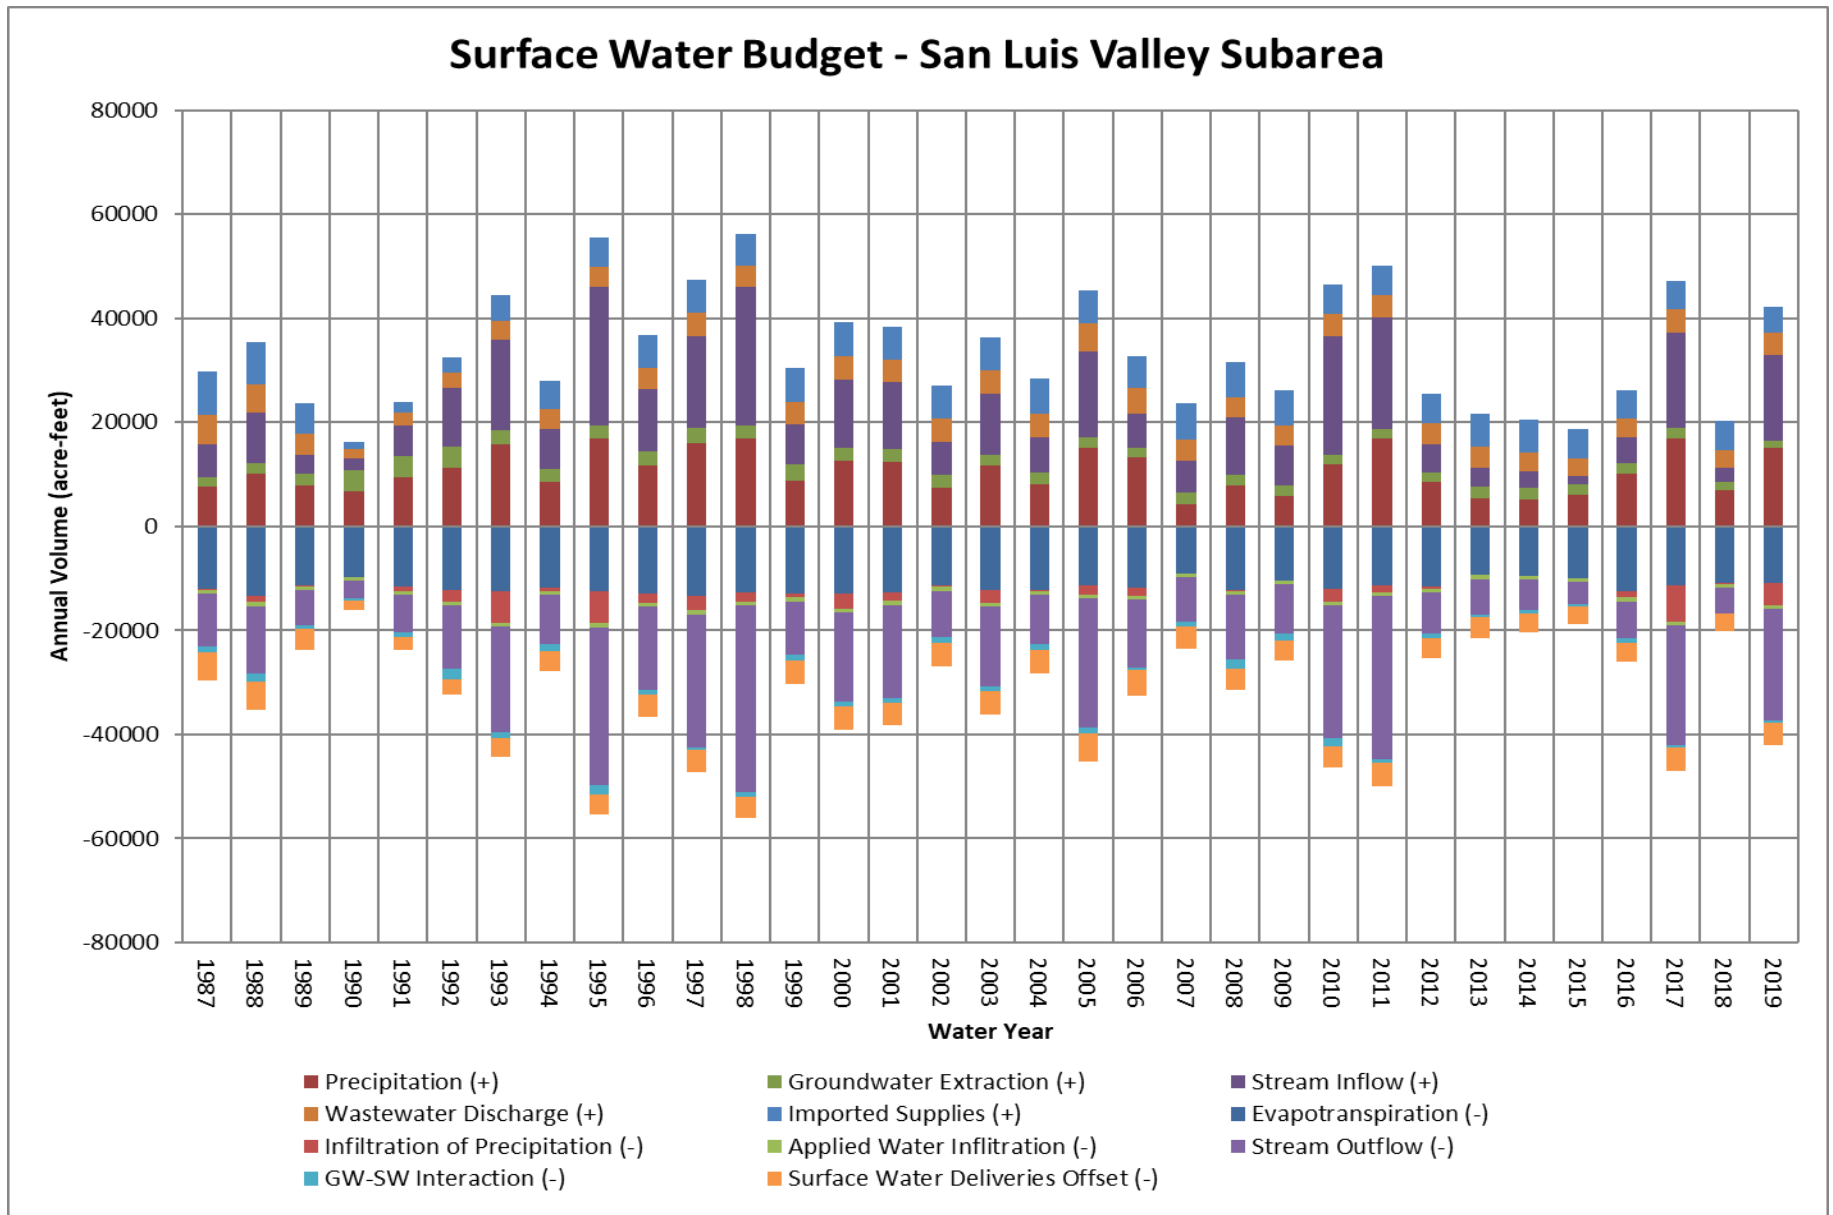


Figure 6-4: Surface Water Budget – San Luis Valley Subarea.



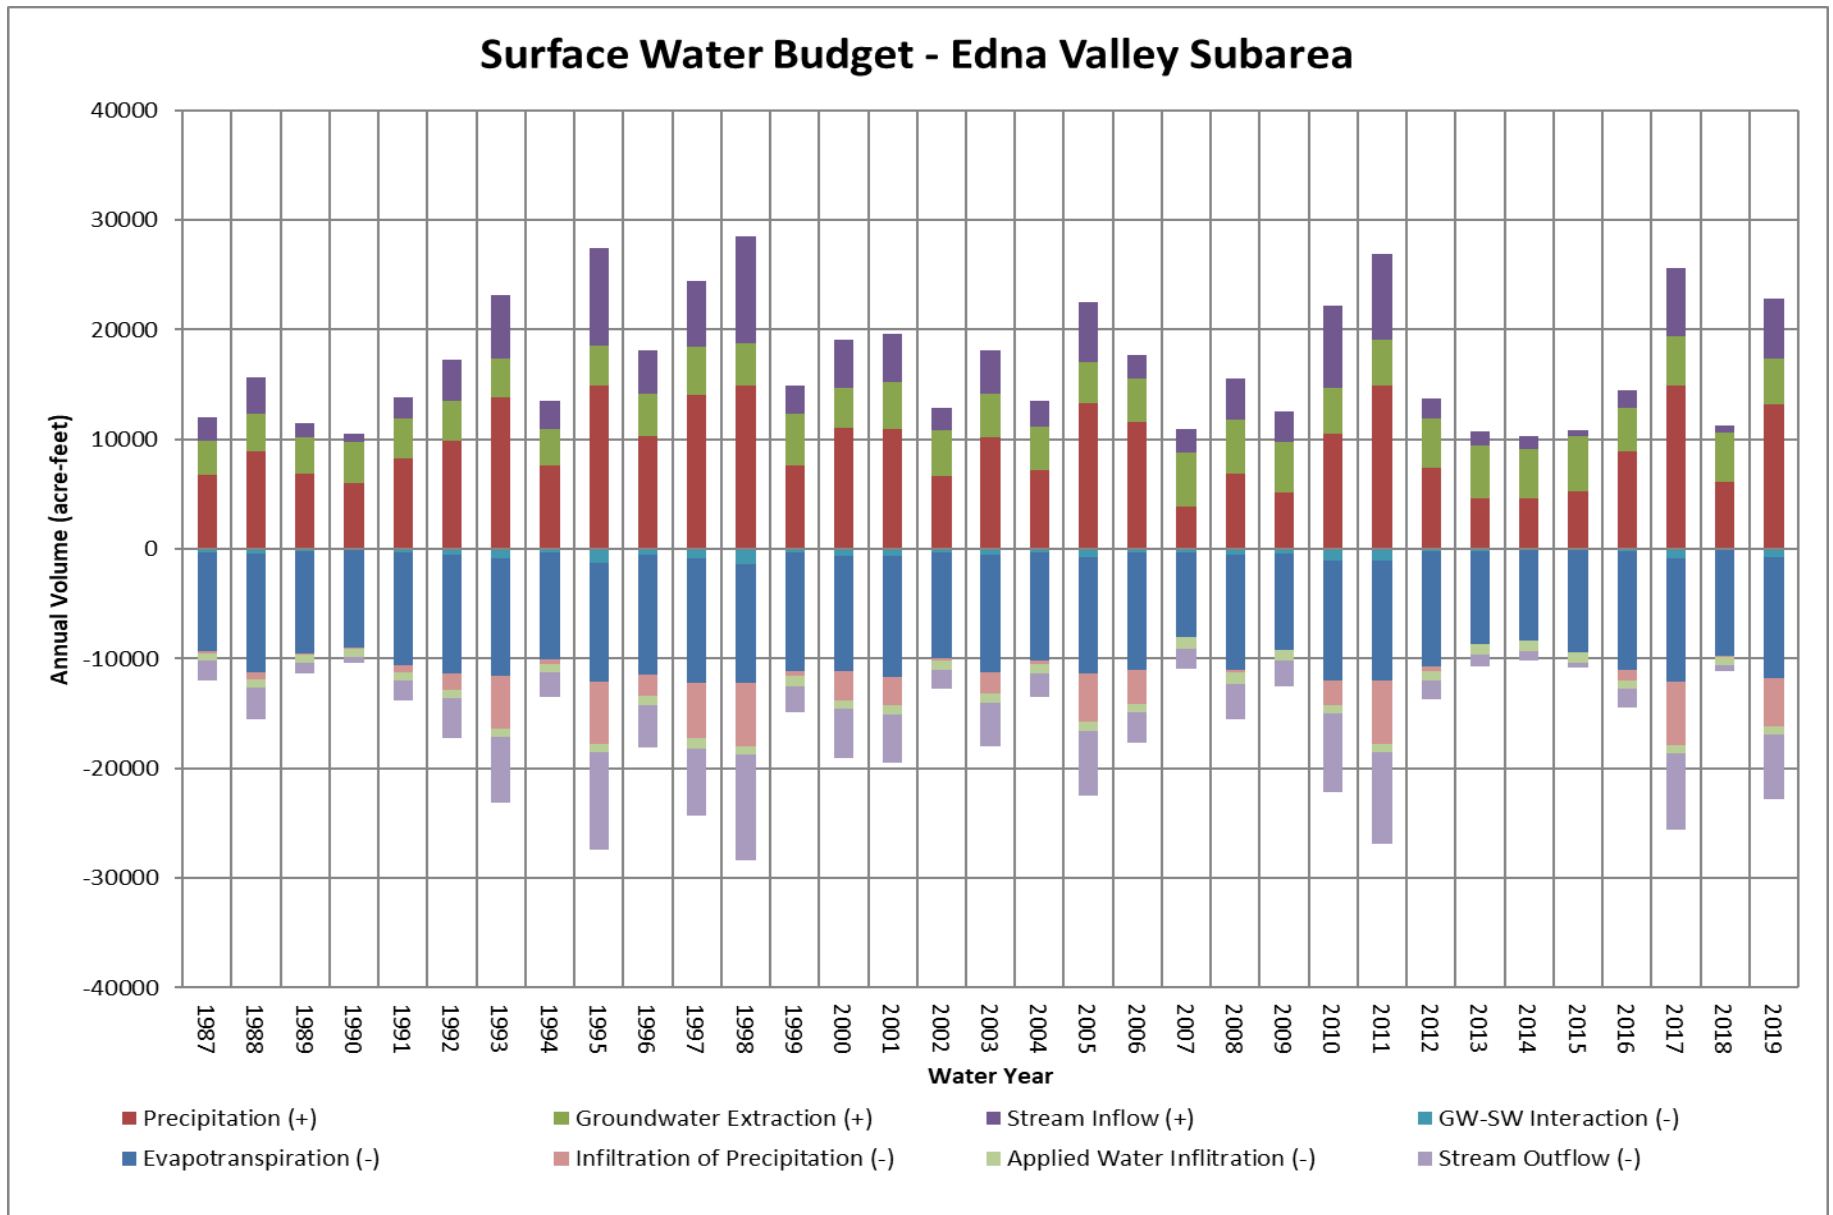


Figure 6-5: Surface Water Budget – Edna Valley Subarea.

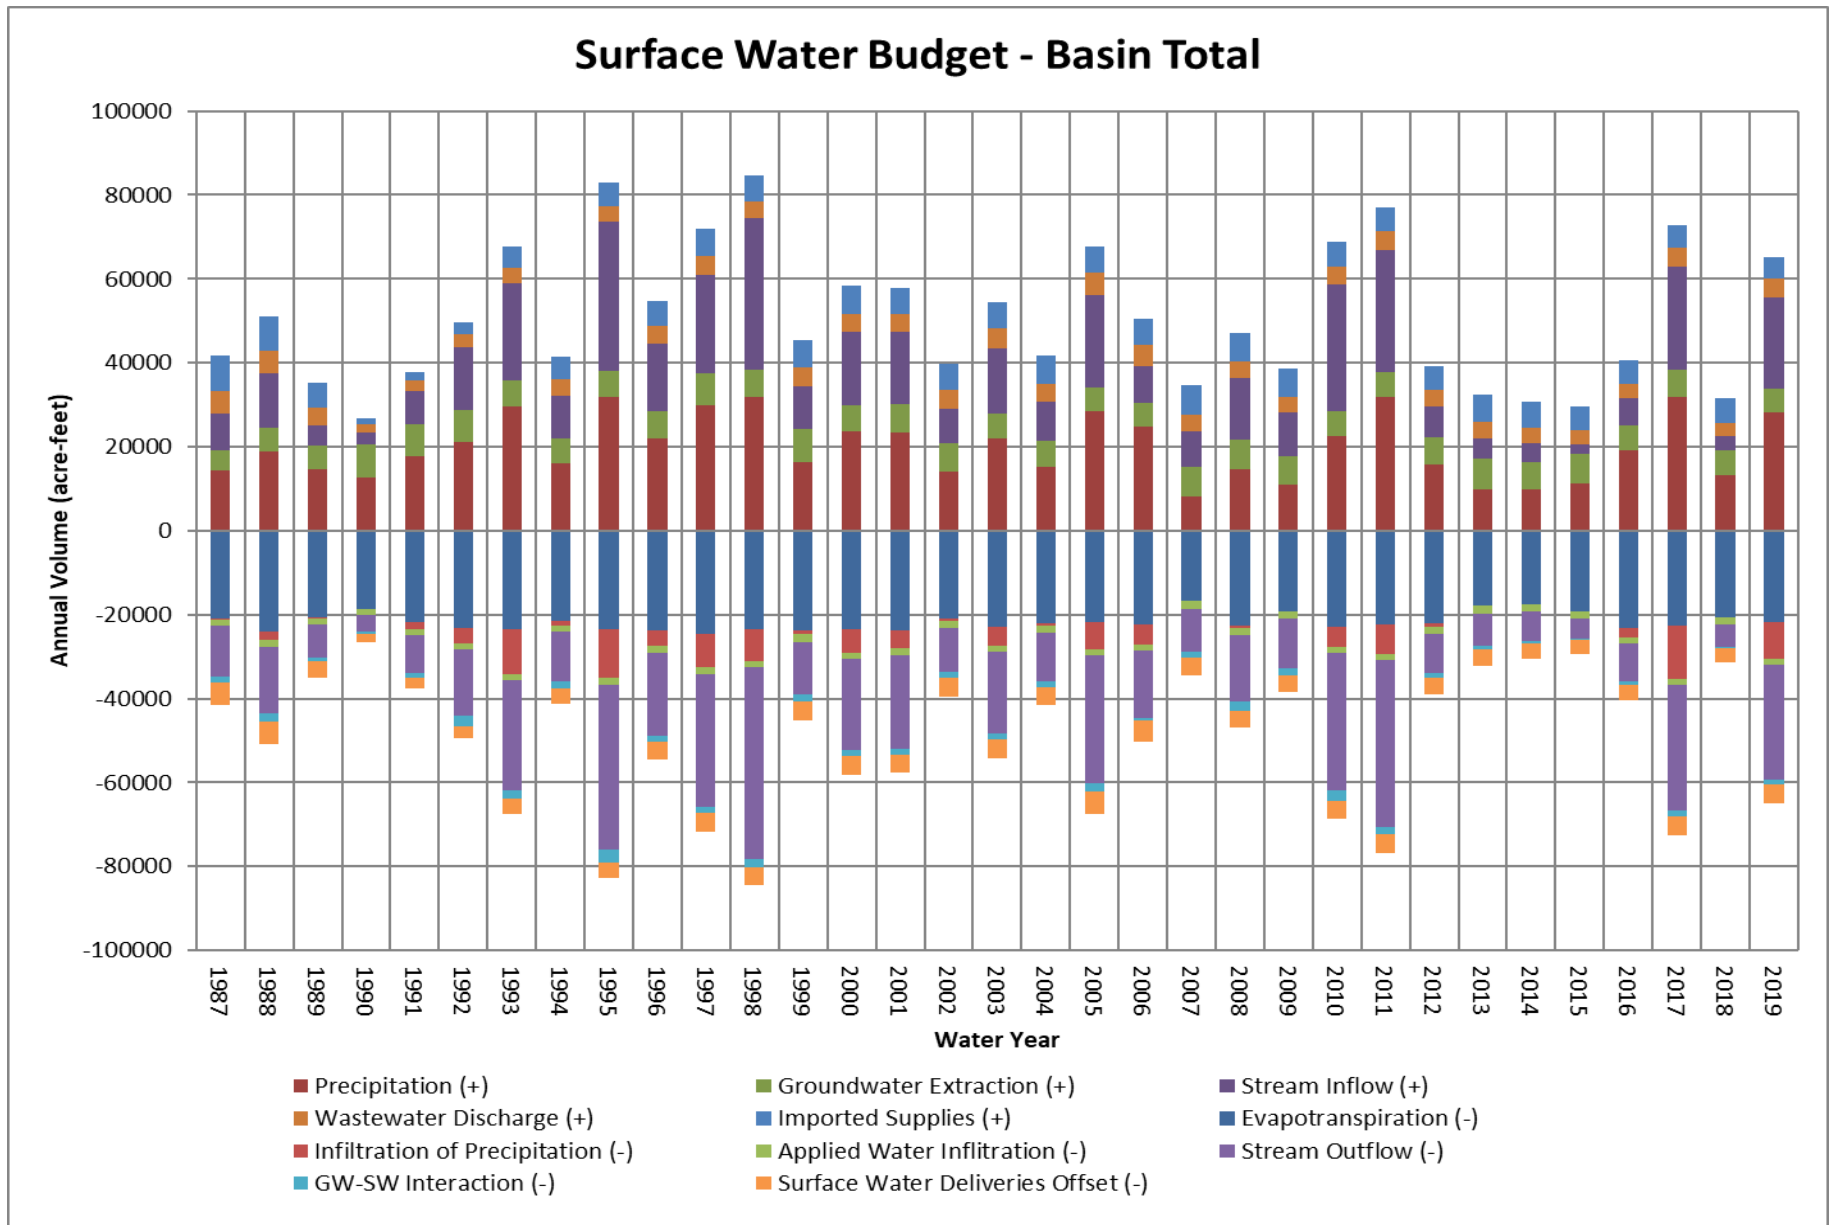


Figure 6-6: Surface Water Budget – Basin Total.

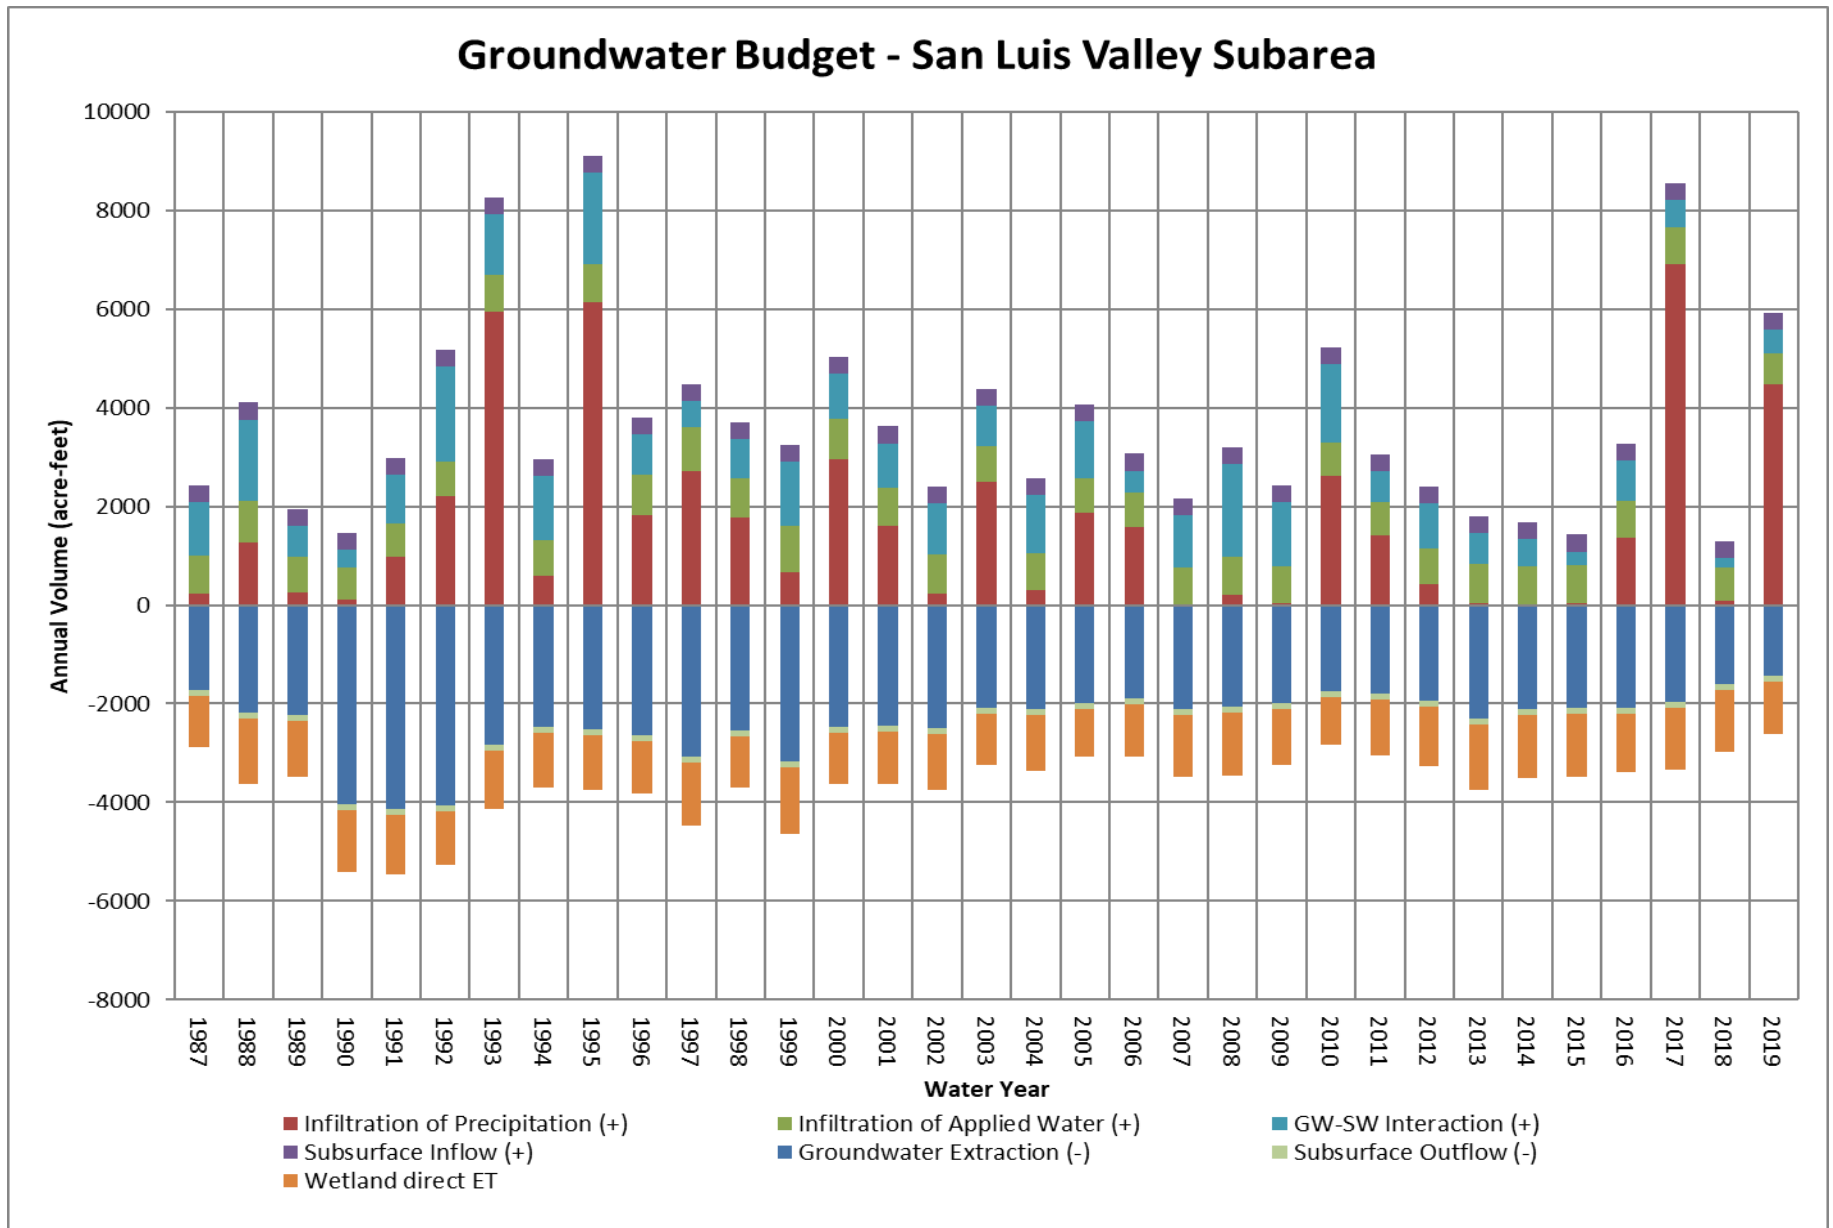


Figure 6-7: Groundwater Budget – San Luis Valley Subarea.

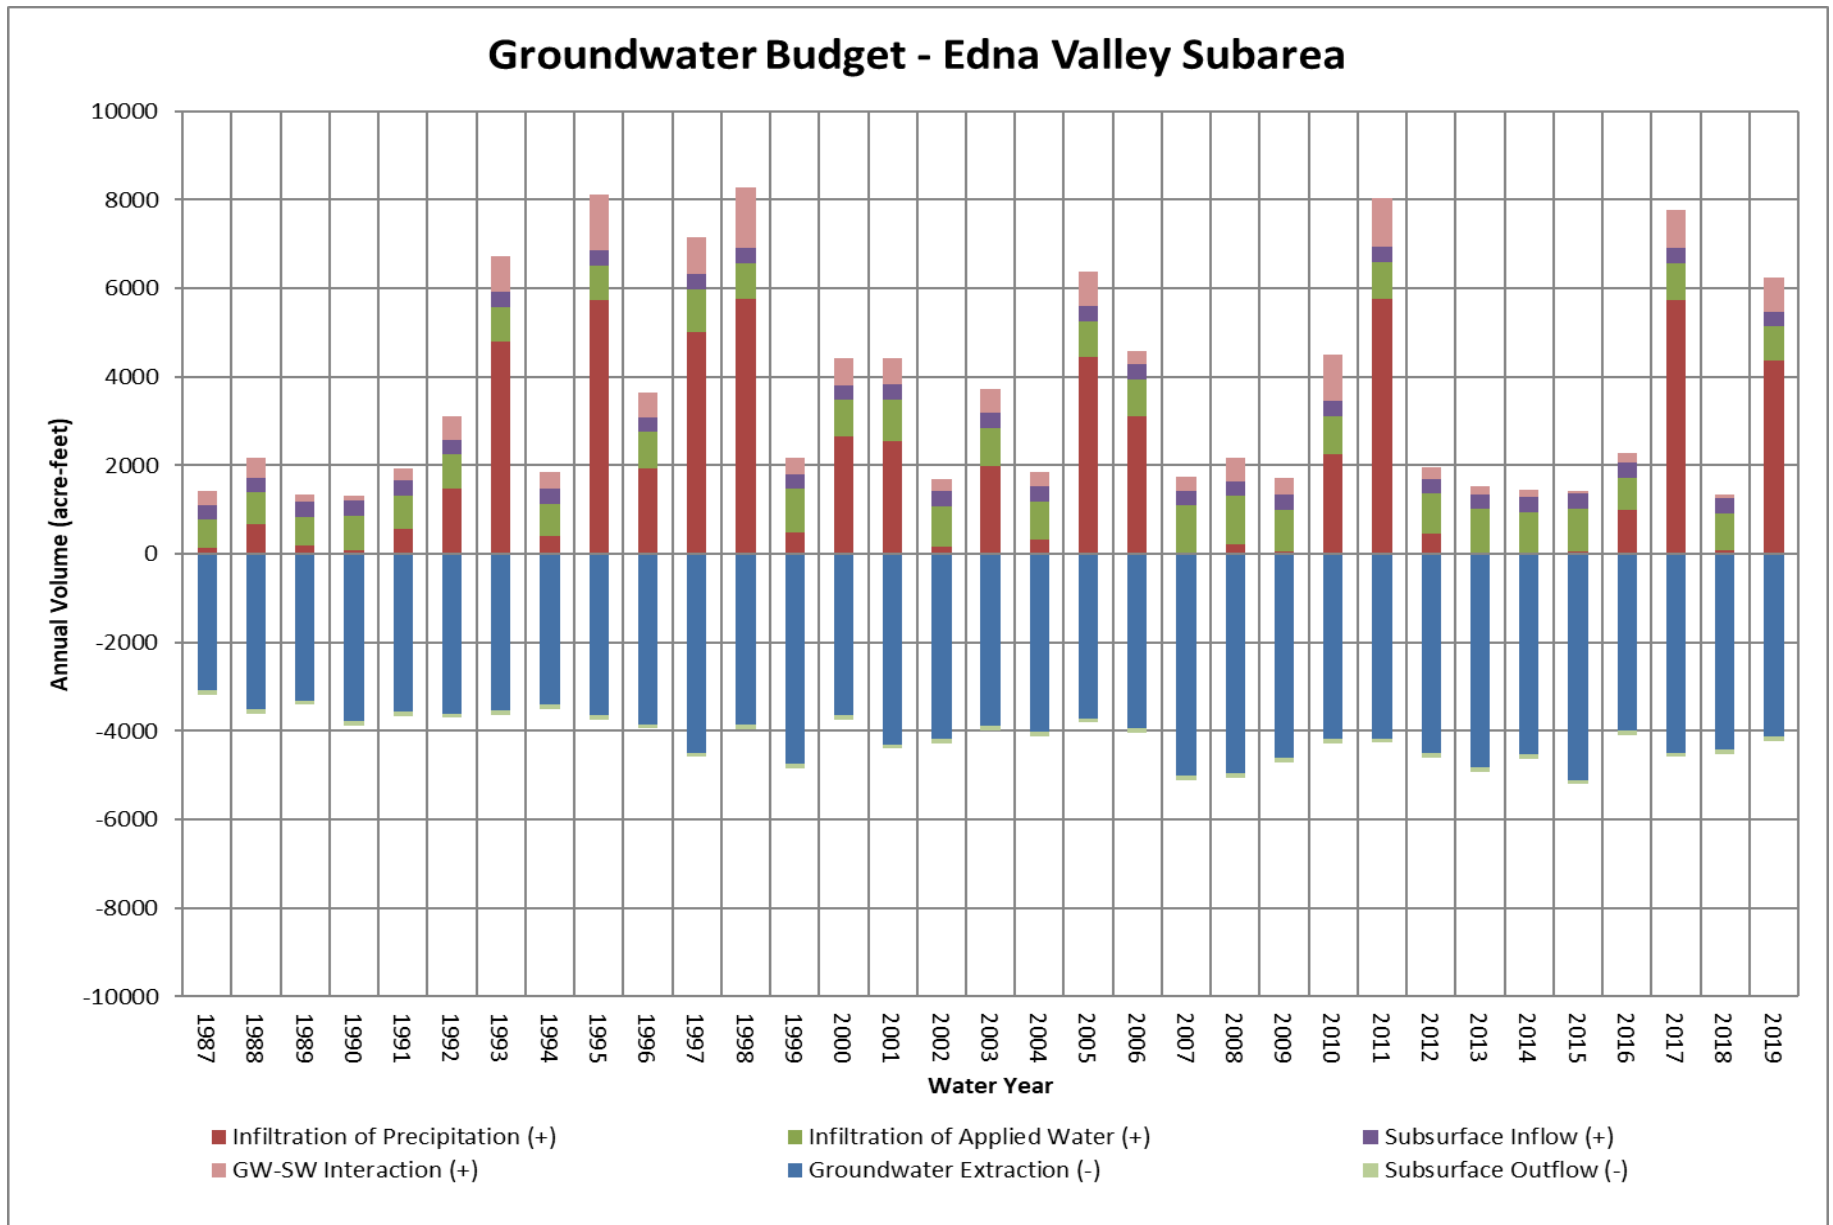


Figure 6-8: Groundwater Budget – Edna Valley Subarea.

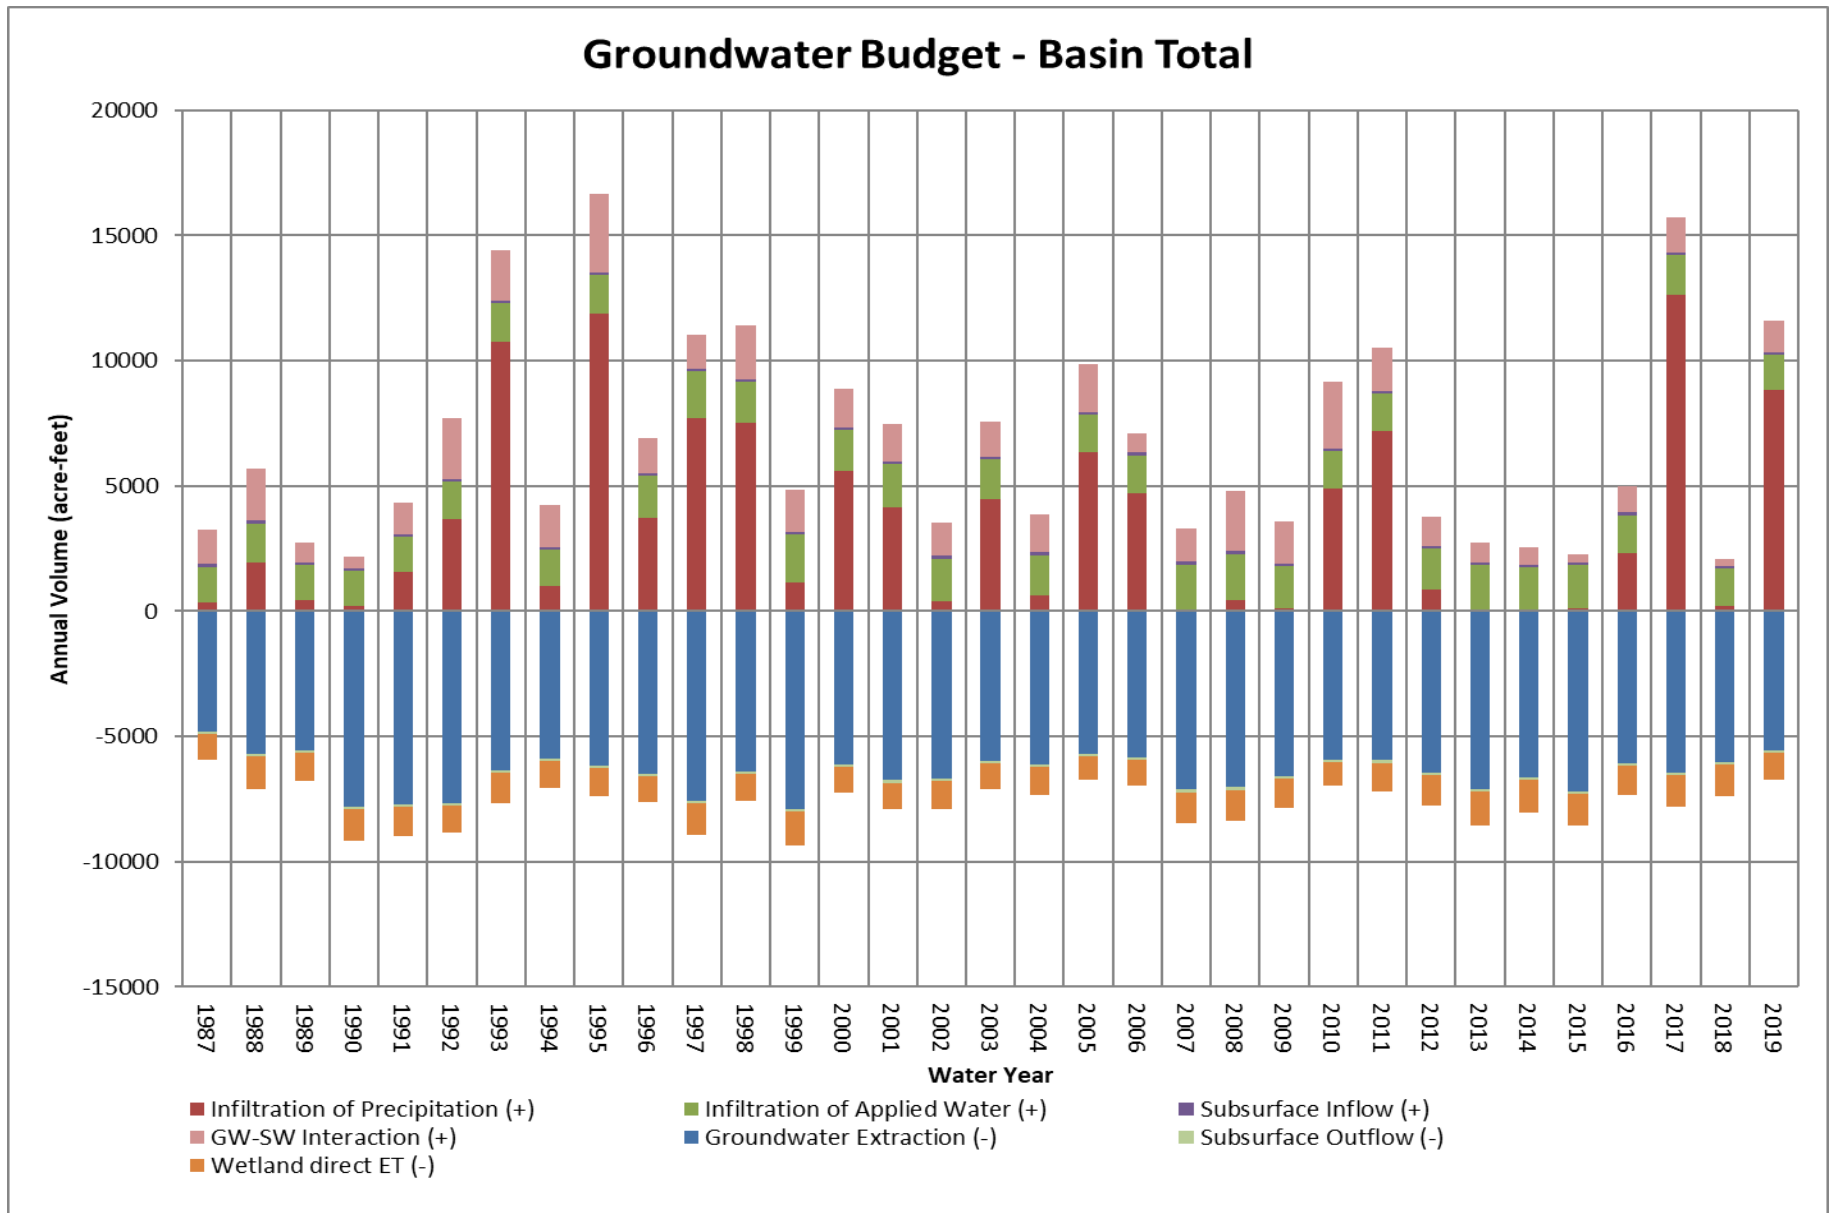


Figure 6-9: Groundwater Budget – Basin Total.

## 6.1 CLIMATE

Climate is one of the principal measures of water supply conditions and is used for hydrologic base period definition and for developing evapotranspiration estimates. The main component of climate monitoring in the Basin is rainfall, with records at the Cal Poly NOAA Station (formerly Cal Poly #1) beginning in the 1870-71 rainfall year. Rainfall is used in the water budget for establishing the hydrologic base period needed for representing long-term water supply conditions.

Another climate parameter used in the water budget is evapotranspiration. Evapotranspiration is calculated from a combination of monitored parameters, such as air temperature, wind speed, solar radiation, vapor pressure, and relative humidity. These parameters, along with precipitation, have been monitored at CIMIS Station #52 (San Luis Obispo – Cal Poly) since 1986. The water budget uses crop evapotranspiration for estimating the applied irrigation requirements for crops (see Section 6.3.4.2). Cal Poly, the San Luis Valle, and the Edna Valley are all within DWR reference evapotranspiration Zone 6, which is one of 18 climate zones in California based on long-term monthly average reference evapotranspiration (CIMIS, 1999).

### 6.1.1 Historical Climate/Base Period

The historical rainfall record at the Cal Poly NOAA Station has been used to define a period of years, referred to as a base period, which represents long-term hydrologic conditions. As described by DWR (2002):

*The base period should be representative of long-term hydrologic conditions, encompassing dry, wet, and average years of precipitation. It must be contained in the historical record and should include recent cultural conditions to assist in determining projected Basin operations. To minimize the amount of water in transit in the zone of aeration, the beginning and end of the base period should be preceded by comparatively similar rainfall quantities.*

The historical rainfall record for the Cal Poly NOAA Station, which is the longest record in the San Luis Obispo area, was presented in Figure 3-11; Chapter 3. The water year in San Luis Obispo County for rainfall runs from July 1 through June 30 (also referred to as rainfall year), while other hydrologic data is reported from October 1 through September 30 (San Luis Obispo County, 2005). These conventions are maintained for the water budget, and water years are referenced herein based on the ending year.

The hydrologic base period selected to represent historical climatic conditions for the Basin encompasses the years 1987 through 2019 (33 years). Average precipitation at the Cal Poly NOAA gage over this base period was 21.76 inches, compared to the long-term average of 21.95 inches, and included wet, average, and dry periods (Figure 6-10). These periods are visually defined by the movement of the cumulative departure from mean precipitation curve, which declines over dry periods, is flat through average periods, and rises over wet periods.

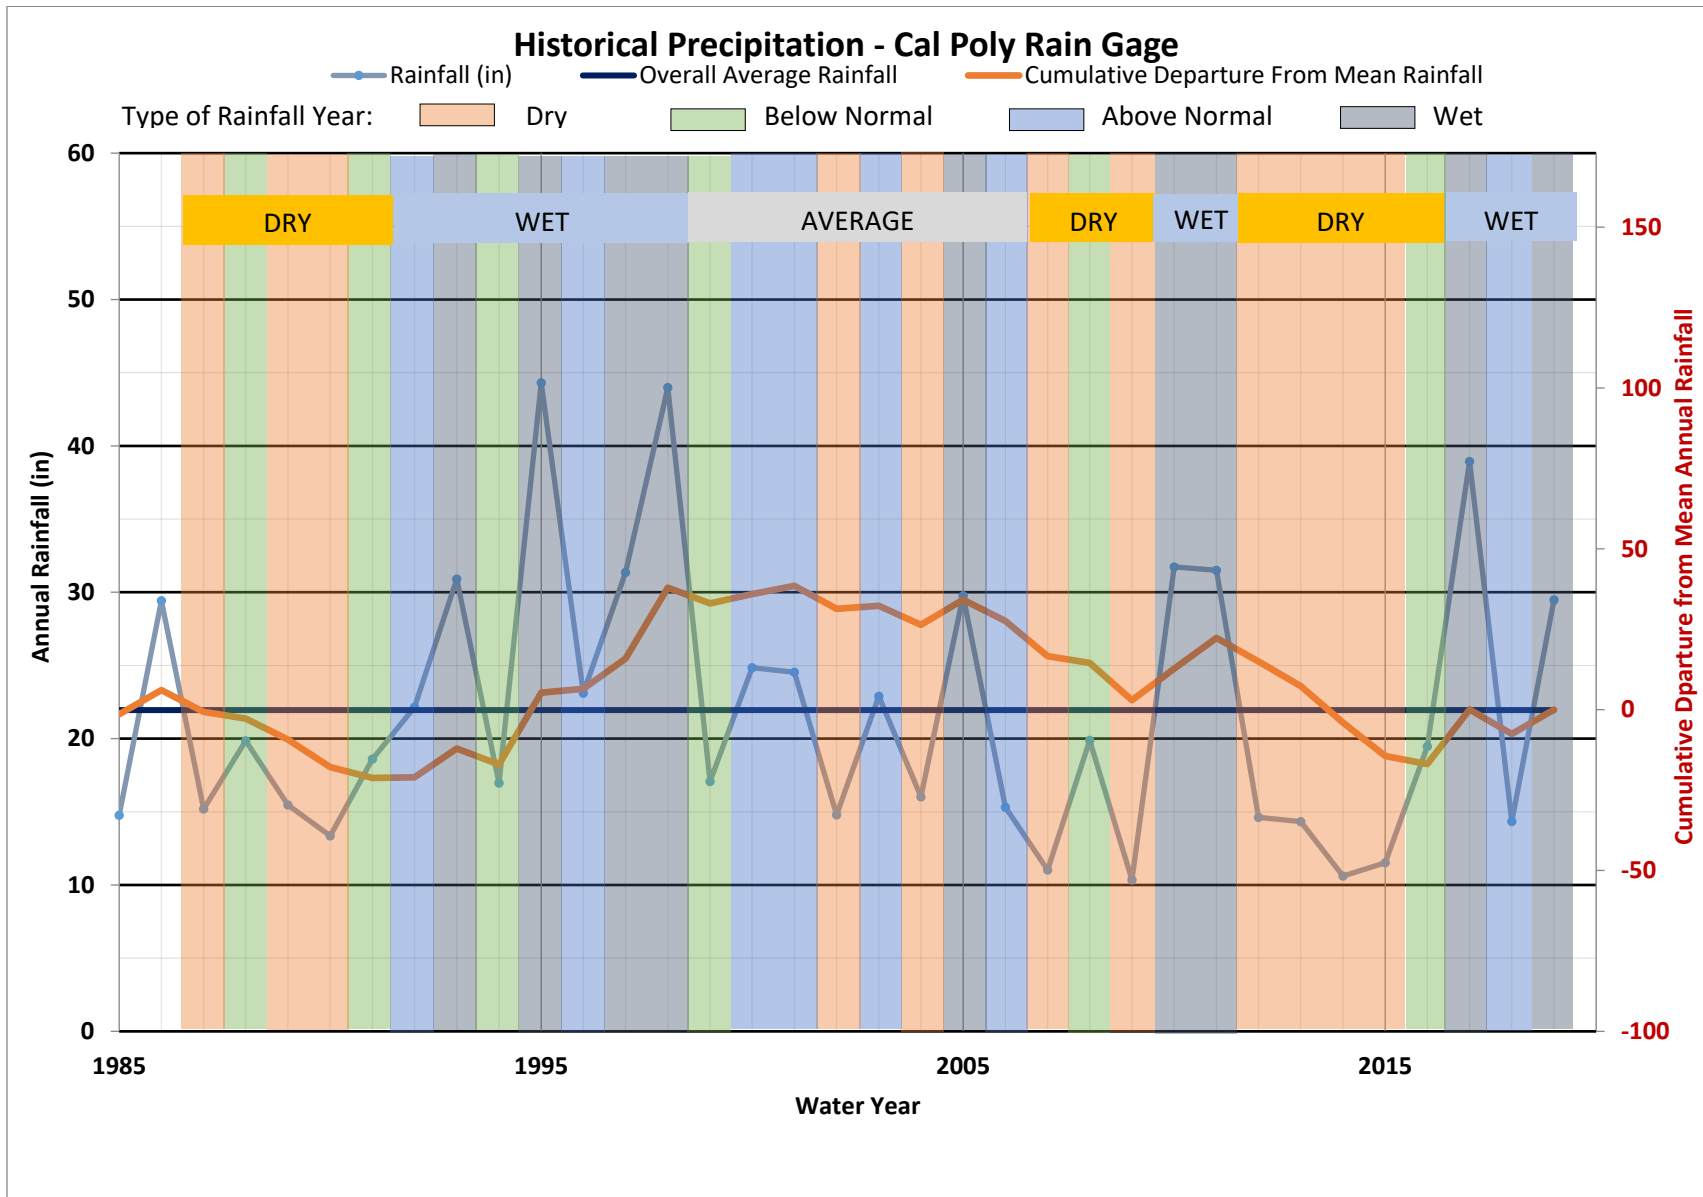


Figure 6-10: 1987-2019 Historical Base Period Climate.

Water year types for this water budget have been developed and classified based on annual precipitation as a percentage of the previous 30-year average precipitation. Each July 1 through June 30 rainfall year of the historical base period was given a ranking of 1 (wettest) through 30 (driest) based on a comparison to a 30-year (rolling) data set. The minimum precipitation threshold for wet type years was assigned based on the average for the 10th ranked year (26.3 inches). The maximum precipitation threshold for dry type years was assigned based on the average for the 21st ranked year (16.8 inches). Below normal (from 16.8 to less than 20.5 inches) represents the 16th through 20th ranked years, while above normal (from 20.5 to 26.3 inches) represents the 10th through 15th ranked years. Note that the division between below normal and above normal rainfall (20.5 inches) is less than the average over the base period (21.76 inches) because there are more below average rainfall years than above average years. The water year types were developed from Cal Poly NOAA rainfall records, with one exception. The exception is the 2006 rainfall year, which would be classified as dry based on 15.31 inches reported at Cal Poly NOAA, but which is considered above normal when reviewing other local rain gages, including the Gas Company rain gage (23.35 inches in 2006).

The base period includes recent cultural conditions, such as expanded recycled water use by the City and water conservation by Basin users in response to the recent drought period. Differences between water in transit in the vadose zone (deep percolation of precipitation and stream seepage) are minimal, based on comparing the two rainfall years leading up to the beginning and ending of the base period. The 1985 and 1986 rainfall years leading in the base period have 14.77 inches and 29.43 inches, respectively, compared to 14.34 and 29.48 inches of rainfall at the end of the base period in 2018 and 2019 (Figure 6-10).

There are other rainfall gages in the Basin (Table 3-5 and Figure 3-10; Chapter 3), and an isohyetal map of average annual rainfall is shown in Figure 4-3 (Chapter 4). The average annual precipitation across the Basin between 1981 and 2010 was approximately 19 inches (Figure 4-3; Chapter 4), compared to the Cal Poly NOAA rainfall gage, which averaged 23.03 inches over that same period.

Although the water budget uses the Cal Poly NOAA gage (formerly Cal Poly #1) to identify the historical base period and water year types due to the extensive period of record, the Gas Company rain gage is used in water budget calculations that involve precipitation volumes to account for the difference between rainfall at Cal Poly and the Basin. A correlation between the Gas Company and Cal Poly NOAA was performed to estimate rainfall prior to 2006 for the historical water budget (Figure 6-11). Based on linear regression using data recorded between 2006 and 2019, rainfall at the Gas Company gage is approximately 90 percent of rainfall at the Cal Poly NOAA gage. No precipitation data was recorded for the Gas Company rain gage prior to 2006, and the 90 percent correlation was used to estimate precipitation at the gage between 1987 and 2005 to complete the historical base period. Climate data from CIMIS Station #52 (located within same enclosure as the Cal Poly NOAA rain gage) has been used for evapotranspiration and applied agricultural water estimates.



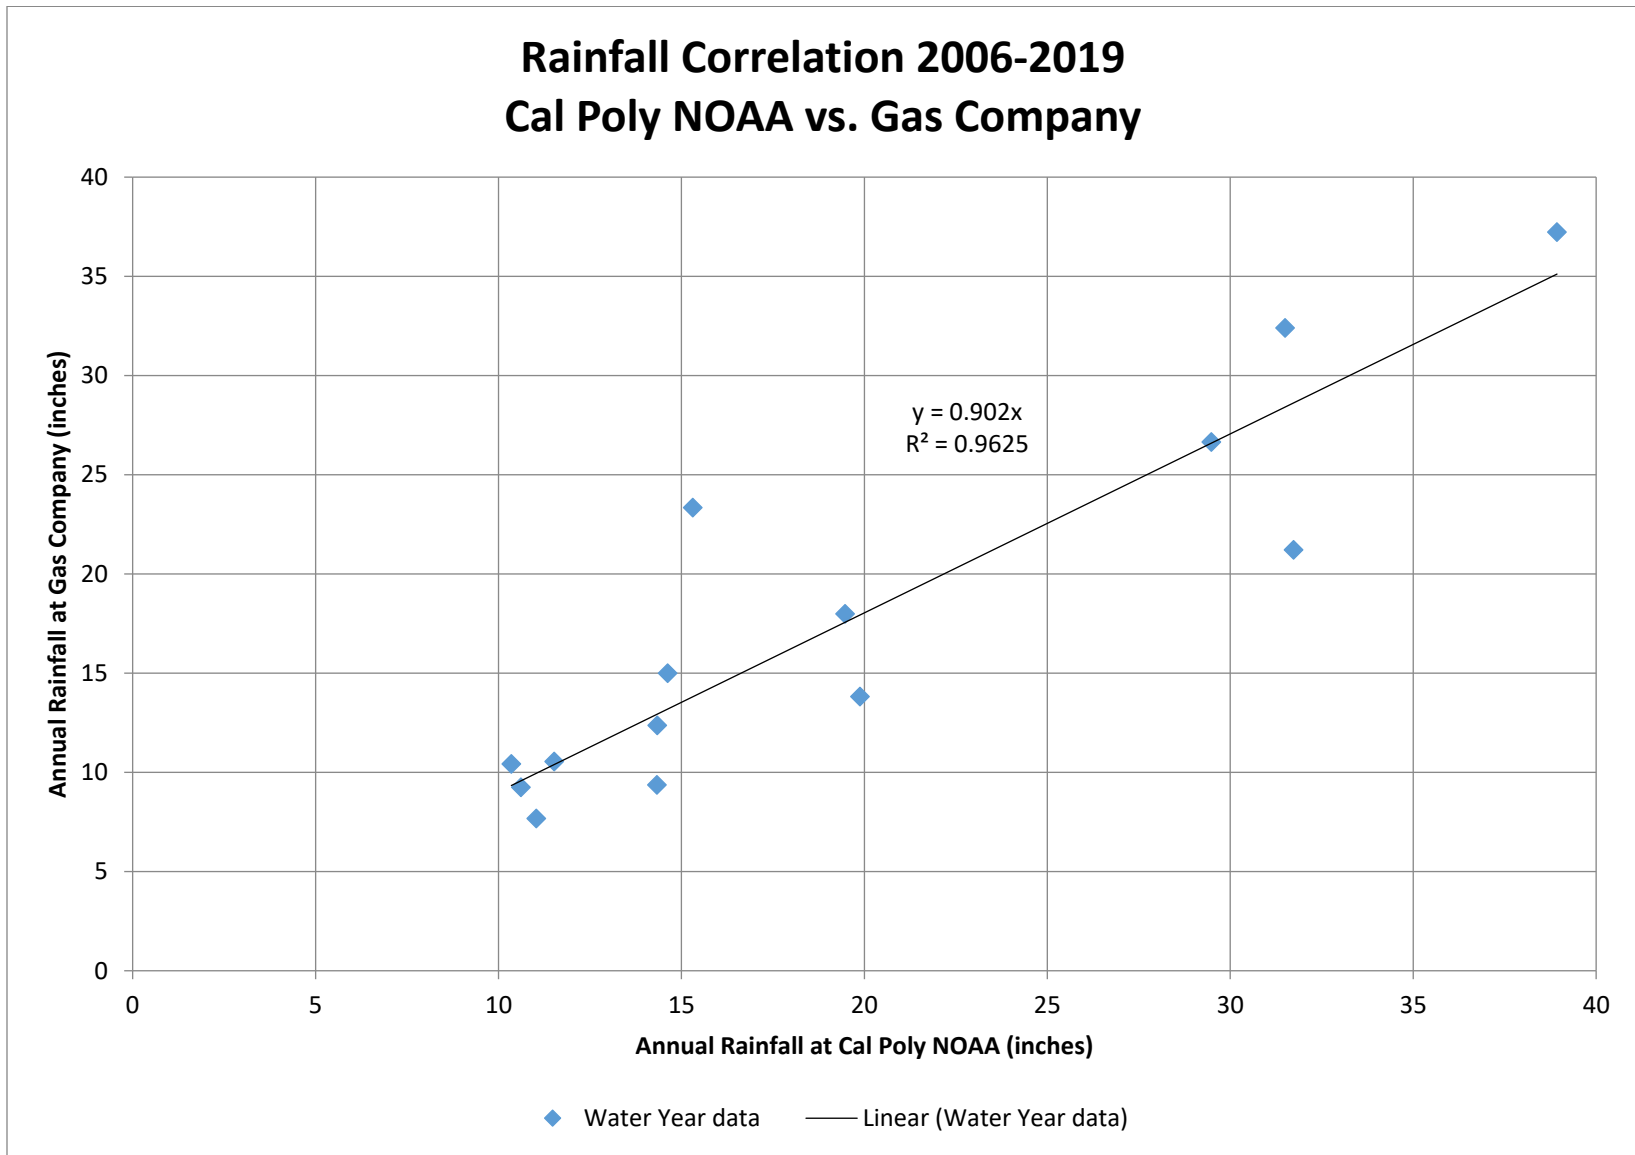


Figure 6-11: Rainfall Correlation Cal Poly vs. Gas Company.

Table 6-4 presents the annual rainfall for the historical water budget. Average annual rainfall within the Basin over the historical base period is estimated to be 19.6 inches. This average closely matches the estimated value for average rainfall across the Basin on the 30-year isohyetal map (Figure 4-3; Chapter 4).

**Table 6-4: Historical Base Period Rainfall.**

Year	Type	Cal Poly NOAA	Gas Company
		Rainfall (in.)	
1987	Dry	15.19	13.67
1988	Below Normal	19.85	17.87
1989	Dry	15.46	13.91
1990	Dry	13.36	12.02
1991	Below Normal	18.6	16.74
1992	Above Normal	22.14	19.93
1993	Wet	30.9	27.81
1994	Below Normal	16.96	15.26
1995	Wet	44.31	39.88
1996	Above Normal	23.11	20.8
1997	Wet	31.36	28.22
1998	Wet	43.98	39.58
1999	Below Normal	17.07	15.36
2000	Above Normal	24.84	22.36
2001	Above Normal	24.54	22.09
2002	Dry	14.79	13.31
2003	Above Normal	22.9	20.61
2004	Dry	16.02	14.42
2005	Wet	29.76	26.78
2006	Above Normal*	15.31	23.35
2007	Dry	11.03	7.68
2008	Below Normal	19.88	13.82
2009	Dry	10.35	10.43
2010	Wet	31.73	21.22
2011	Wet	31.5	32.4
2012	Dry	14.62	15
2013	Dry	14.33	9.37
2014	Dry	10.61	9.25
2015	Dry	11.52	10.55
2016	Below Normal	19.47	17.99
2017	Wet	38.93	37.23
2018	Dry	14.34	12.37
2019	Wet	29.48	26.65
<b>Average</b>		21.8	19.6

Gas Company Estimates in blue (approximately 90% of Cal Poly)

\*2006 type year based on Gas Company gage reporting

## 6.2 WATER BUDGET DATA SOURCES

The following sources and types of data have been used for the water budget:

- Hydrogeologic and geologic studies and maps
- Groundwater monitoring reports
- County stream flow gages
- County and NOAA precipitation Stations
- PRISM 30-year normal dataset (1981-2010)
- CIMIS weather station data
- Aerial Imagery
- County water level monitoring program
- San Luis Obispo City, County and DWR land use data and planning documentation
- County Ag commissioner's office data sets
- County Water Master Plan
- Geotracker Groundwater Information System
- Stakeholder supplied information
- Environmental Impact Reports
- Water rights filings
- SRWQCB Drinking Water Division Water systems
- Wastewater discharge reports

## 6.3 HISTORICAL WATER BUDGET

In accordance with GSP regulations, the historical water budget shall quantify the following, either through direct measurement or estimates based on data (reference to location of data in Chapter 6 also listed):

- (1) Total surface water entering and leaving a Basin by water source type (Table 6-3).
- (2) Inflow to the groundwater system by water source type, including subsurface groundwater inflow and infiltration of precipitation, applied water, and surface water systems, such as lakes, streams, rivers, canals, springs, and conveyance systems (Table 6-3).
- (3) Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow (Table 6-3).
- (4) The change in annual volume of groundwater in storage between seasonal high conditions (Table 6-3).
- (5) If overdraft occurs, as defined in Bulletin 118, the water budget shall include a quantification of overdraft over a period of years during which water year and water supply conditions approximate average conditions (Section 6.3.8).
- (6) The water year type associated with the annual supply, demand, and change in groundwater stored (Table 6-3).
- (7) An estimate of sustainable yield for the Basin (Section 6.3.7).

### 6.3.1 Historical Time Period

The time period over which the historical water budget is estimated is the hydrologic base period from 1987-2019 (33 years). Groundwater storage calculations using the specific yield method were performed for 1986, 1990, 1995, 1998, 2005, 2011, 2014, and 2019. These years include the beginning and ending years in the base period, along with sufficient intervening years to characterize change in storage trends through the base period.


### 6.3.2 Historical Land Use

Land use is one of the primary data sets used in developing a water budget. Several types of land use/land cover in the basin have been used to estimate components of the water budget. For example, the acreages of various crops are multiplied by their respective water use factors to estimate agricultural groundwater extractions (Section 6.3.4.2), and acreages of various land covers are multiplied by empirical correlations to estimate their respective evapotranspiration and percolation of precipitation (Section 6.3.4.1). The land uses/land covers including the following:

- Irrigated Agriculture
  - Citrus
  - Deciduous
  - Pasture
  - Vegetable
  - Vineyard
- Native Vegetation
  - Brush, trees, native grasses
  - Wetlands/open water
- Urban/Suburban
  - Developed (City, subdivisions)
  - Open space (parks, empty lots)
  - Turf (golf courses, play fields)

#### **Irrigated Agriculture**

Irrigated crop acreage was estimated from aerial imagery of the Basin for the following years: 1987, 1994, 1999, 2003, 2005, 2007, 2009, 2010, and 2011. San Luis Obispo County land use data was used for crop acreage from 2013 to 2018. DWR land use surveys for 1985, 1995, and 2014 were also reviewed during the interpretation of aerial imagery. Figure 6-12 shows an example of the County irrigated crop data set for 2016.

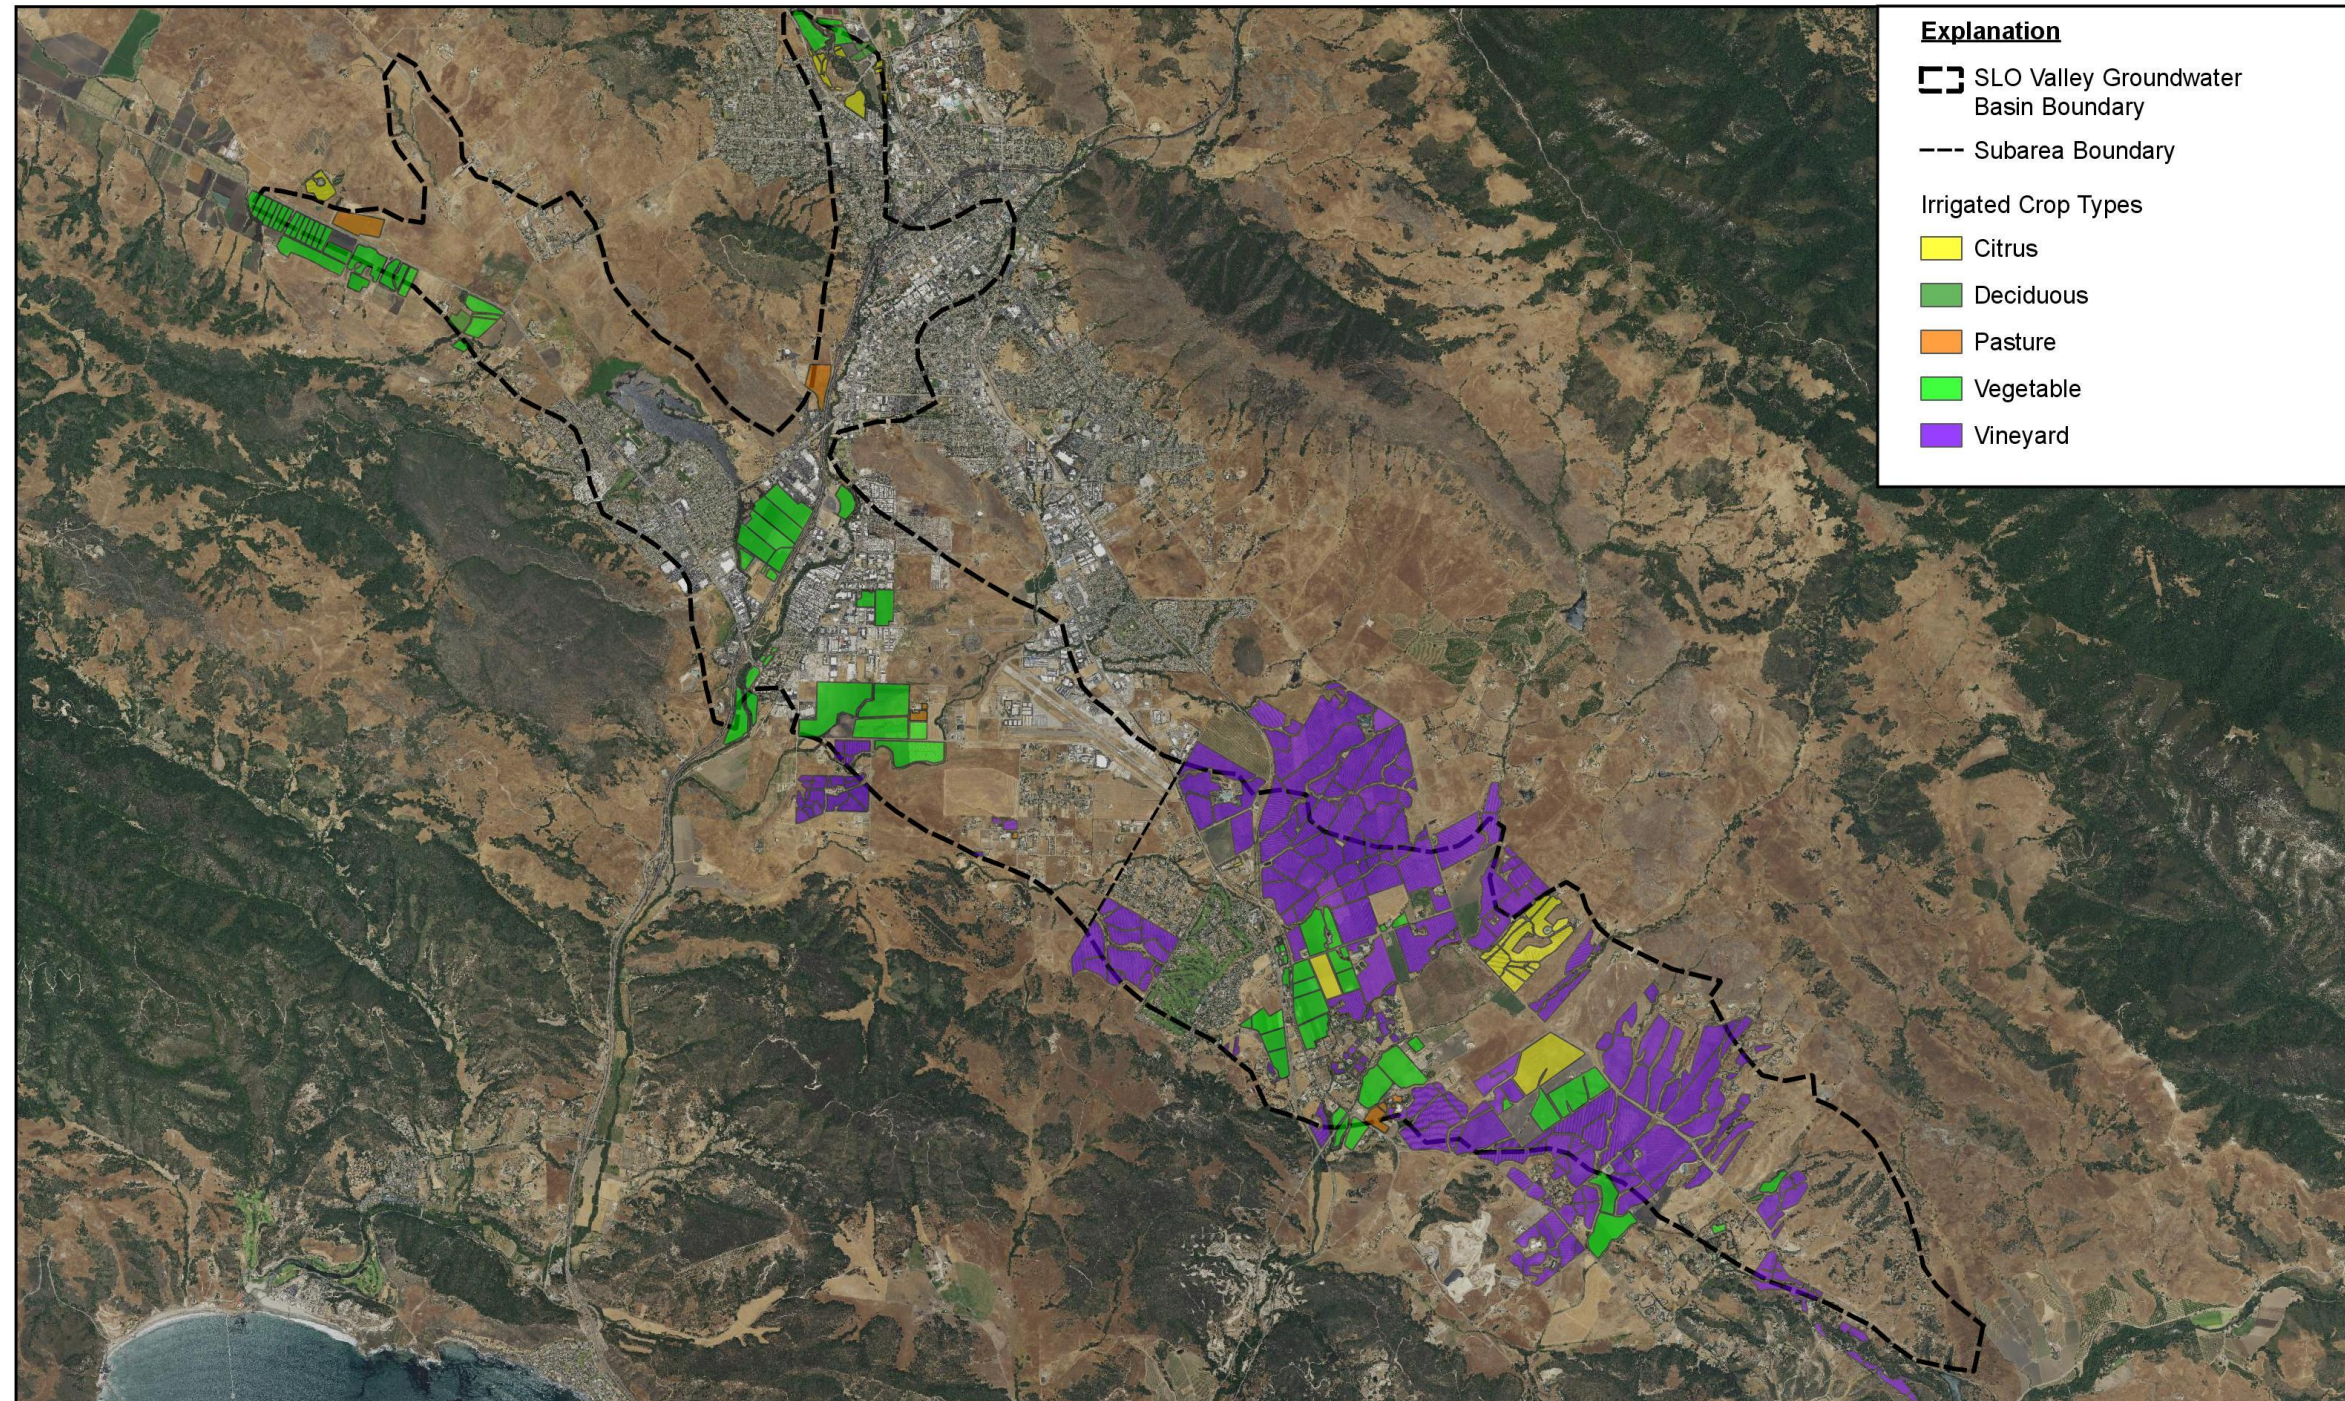

**Explanation**

- SLO Valley Groundwater Basin Boundary
- Subarea Boundary

Irrigated Crop Types

- Citrus
- Deciduous
- Pasture
- Vegetable
- Vineyard




Prepared For:




Author: TK  
 Date: 05/21/2020

SAN LUIS OBISPO VALLEY BASIN GSP

N

**References:**

1. Coordinate System: State Plane California V FIPS 0405 Feet
2. Projection: Lambert Conformal Conic
3. Horizontal Datum: NAD 83
4. Vertical Datum: NAVD 88
5. Basemap: 2016 NAIP Satellite Imagery

**Notes:**

- 1.
- 2.
- 3.

San Luis Obispo Valley Basin Irrigated Crops  
 2016

Figure 6-12

Irrigated acreage for years in the historical base period without aerial imagery, surveys, or County data were estimated from the nearest available year with data. Acreages for irrigated crops, estimated from aerial imagery and County datasets within the historical base period are shown in Table 6-5.

**Table 6-5: Irrigated Agriculture Acreages.**

Crop Type	1987	1994	1999	2003	2005	2007	2009	2010	2011	2013	2014	2015	2016	2017	2018
San Luis Valley Subarea (acres)															
Citrus	26	26	30	51	49	49	49	49	49	45	44	44	44	46	46
Deciduous	12	12	12	12	12	12	12	12	12	67	21	17	17	17	17
Pasture	33	22	27	28	28	28	28	28	28	28	37	37	53	28	28
Vegetable	594	766	880	647	592	487	526	494	495	488	490	532	593	492	363
Vineyard	0	5	6	6	8	58	58	58	58	92	86	86	86	86	86
Subtotal	665	831	955	744	689	634	673	641	642	720	678	716	793	669	540
Edna Valley Subarea (acres)															
Citrus	12	6	47	49	51	51	53	49	105	105	111	111	191	191	210
Deciduous	0	0	0	0	0	0	0	0	0	0	2	2	2	4	3
Pasture	138	19	19	19	19	19	19	19	19	16	19	19	15	14	13
Vegetable	533	703	685	686	646	699	663	679	647	671	670	691	394	505	453
Vineyard	1,180	1,344	1,900	2,252	2,297	2,377	2,377	2,372	2,380	2,423	2,419	2,419	2,454	2,415	2,323
Subtotal	1,863	2,072	2,651	3,006	3,013	3,146	3,112	3,119	3,151	3,215	3,221	3,242	3,056	3,129	3,002

***Native Vegetation and Urban Areas***

Native vegetation acreages were compiled using data sets from the National Land Cover Database (NLCD), which is derived primarily from satellite imagery. The years for which NLCD coverage is available are 2001, 2004, 2006, 2008, 2011, 2013, and 2016. Adjustments to the acreages in the NLCD data were performed to reconcile with the agricultural acreages and urban turf areas (golf course, play fields) compiled using the aerial imagery and crop survey data set. Where the NLCD data sets showed less agricultural acreage than the aerial imagery, the native vegetation (brush, trees, grassland) acreage was reduced so the total basin acreage remained constant. The estimated acreages for native vegetation and urban areas, along with irrigated agriculture interpolated from Table 6-5, are presented in Table 6-6 below.

**Table 6-6: Land Cover Acreages.**

Land cover	2001	2004	2006	2008	2011	2013	2016
	San Luis Valley Subarea (acres)						
Native - brush, trees, grassland	2,315	2,450	2,482	2,466	2,386	2,315	2,203
Native - wetlands/open water	566	566	573	571	569	569	575
Urban - Developed	2,150	2,142	2,219	2,219	2,325	2,312	2,353
Urban - Open Space	870	875	841	841	829	835	825
Urban - Turf	23	23	23	23	23	23	23
Irrigated Agriculture	849	716	636	653	642	720	793
Subarea Total	6,773	6,773	6,773	6,773	6,773	6,773	6,773
	Edna Valley Subarea (acres)						
Native - brush, trees, grassland	2,659	2,473	2,406	2,356	2,333	2,266	2,423
Native - wetlands/open water	13	17	13	13	15	13	13
Urban - Developed	230	230	232	232	232	235	237
Urban - Open Space	77	77	77	77	77	78	79
Urban - Turf	141	141	141	141	141	141	141
Irrigated Agriculture	2,829	3,010	3,079	3,129	3,150	3,215	3,056
Subarea Total	5,948	5,948	5,948	5,948	5,948	5,948	5,948

**6.3.3 Historical Surface Water Budget**

The surface water system is represented by water at the land surface within the boundaries of the Basin. Surface water systems for the water budget include streams and Laguna Lake.

**6.3.3.1 Components of Surface Water Inflow**

The surface water budget includes the following sources of inflow:

- Local Supplies
  - Precipitation
  - Groundwater extractions
  - Stream inflow at Basin boundary
  - Groundwater-Surface Water Interactions
  - Treated wastewater discharge into streams
- Local Imported Supplies
  - Nacimiento Project Water
  - Salinas Reservoir Water
  - Whale Rock Reservoir Water

**Precipitation**

Precipitation occurs as rainfall. The annual volume of rainfall within the Basin has been estimated by multiplying the rainfall year totals in Table 6-4 by each Basin subarea. Rainfall volumes falling within the Basin boundary are shown as precipitation in the surface water inflow budget of Table 6-1, Table 6-2, and Table 6-3.

**Groundwater Extractions**


Groundwater extractions are included in the surface water budget as inflow because after extraction groundwater is distributed and applied at land surface. The surface water budget includes the land surface

system and rivers & streams system (Figure 6-2). These extractions are divided into Urban and Agricultural water use sectors and match the groundwater extraction outflow values from the groundwater budget. Details on data collection and groundwater pumping estimates are provided in the Historical Groundwater Budget section (Section 6.3.3).

**Stream Inflow at Basin Boundary**

Inflow along stream channels at the Basin boundary has been estimated based on paired watershed methodology. The total watershed area drained by the Basin was divided into 15 sub-watershed areas, one of which was the subarea drained by San Luis Obispo Creek upstream of the Andrews Street gage (sub-watershed 1, Figure 6-13). Flow from 2007 through 2018 at the Andrews Street gage was reconstructed using stage records and a stage-discharge curve. The resulting annual flows were then processed using a watershed area factor and an isohyetal factor to estimate annual flows for each of the other 14 subareas. The watershed area factor was the ratio of the watershed area for which flow was being estimated to the Andrews Street gage watershed area. The isohyetal factor addressed differences between the average annual rainfall across each of the sub-watersheds being compared (Figure 6-13), and consisted of the ratio of average annual precipitation over 15 inches between sub-watersheds. Correlation between rainfall and runoff for the paired watersheds are shown in Figure 6-14. A drought period adjustment was also made for 1989-1991 inflow estimates (Figure 6-14) consisting of 3,000 AFY less inflow for the San Luis Valley subarea and 1,000 AFY less inflow for the Edna Valley subarea. Once these factors were applied, the estimated stream flow entering the respective SLO subarea watershed and Edna Valley subarea watershed were totaled.



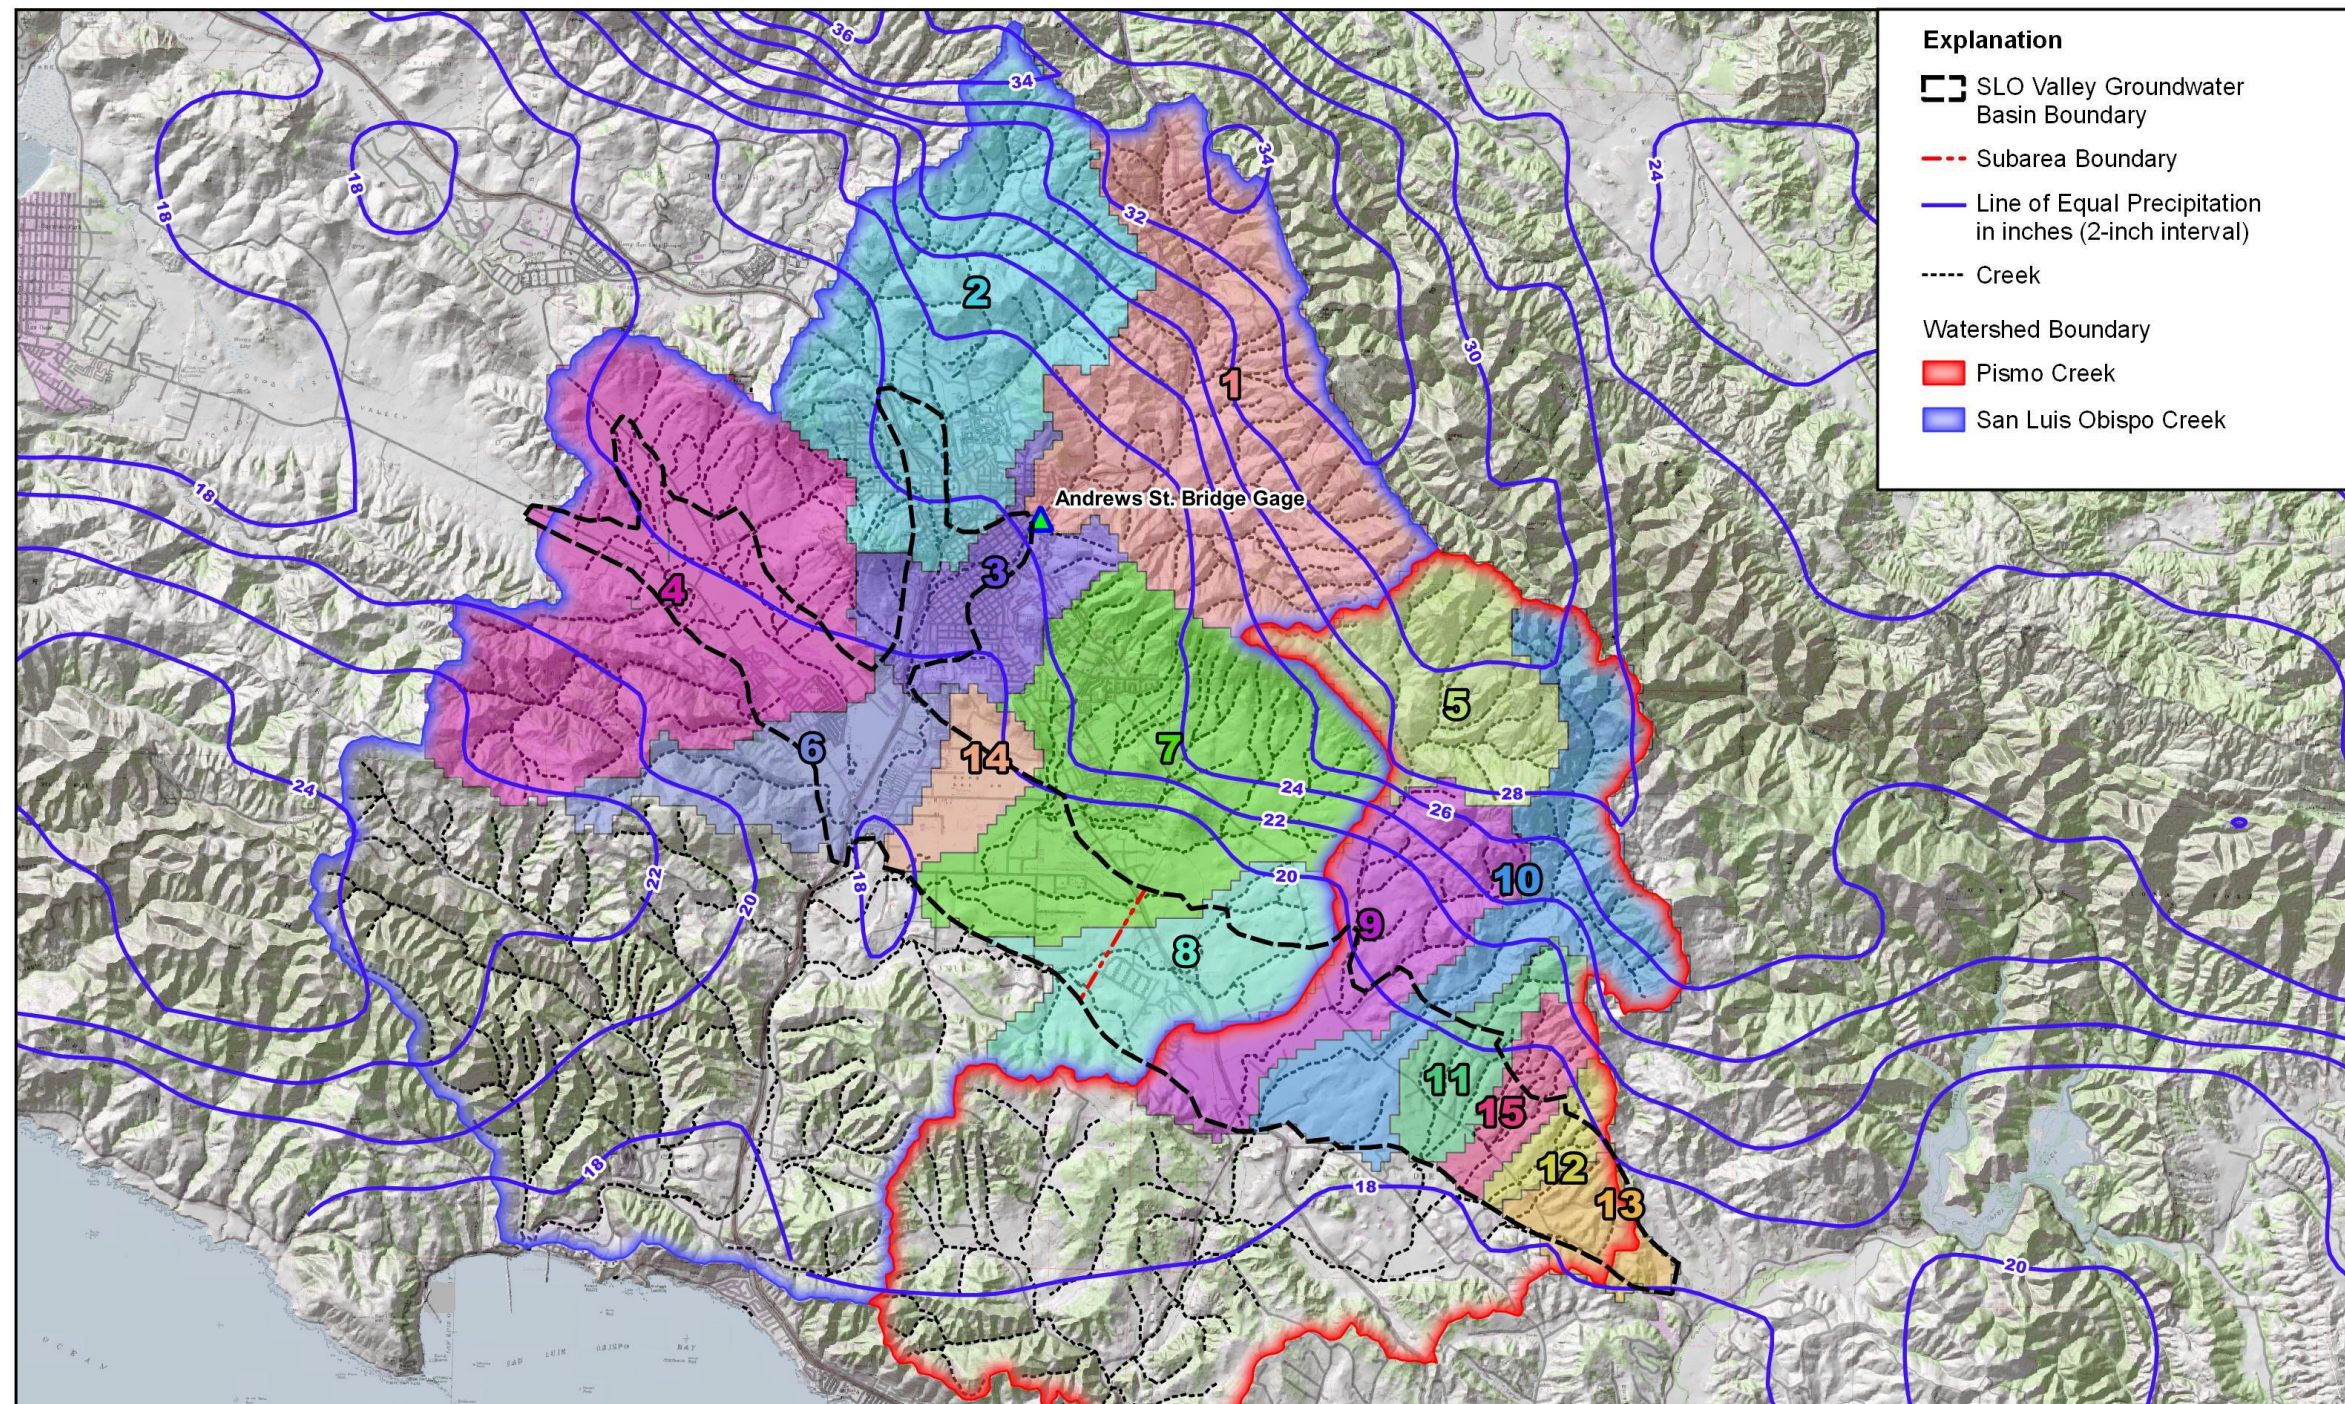

**Explanation**

- SLO Valley Groundwater Basin Boundary
- Subarea Boundary
- Line of Equal Precipitation in inches (2-inch interval)
- Creek
- Watershed Boundary**
- Pismo Creek
- San Luis Obispo Creek

Prepared For:  
 COUNTY OF SAN LUIS OBISPO  
 CITY OF SAN LUIS OBISPO  
 SAN LUIS OBISPO VALLEY BASIN GSP

N

0 0.5 1 1.5 mi  
 0 0.5 1 1.5 2 km

**References:**

1. Coordinate System: State Plane California V FIPS 0405 Feet
2. Projection: Lambert Conformal Conic
3. Horizontal Datum: NAD 83
4. Vertical Datum: NAVD 88
5. Basemap: USGS 7.5' Topographic Map

**Notes:**

1. Precipitation data from: PRISM 30 yr Normal dataset (1981-2010)
- 2.
- 3.

**Basin Sub-watershed Areas and Isohyetals**

**Figure 6-13**

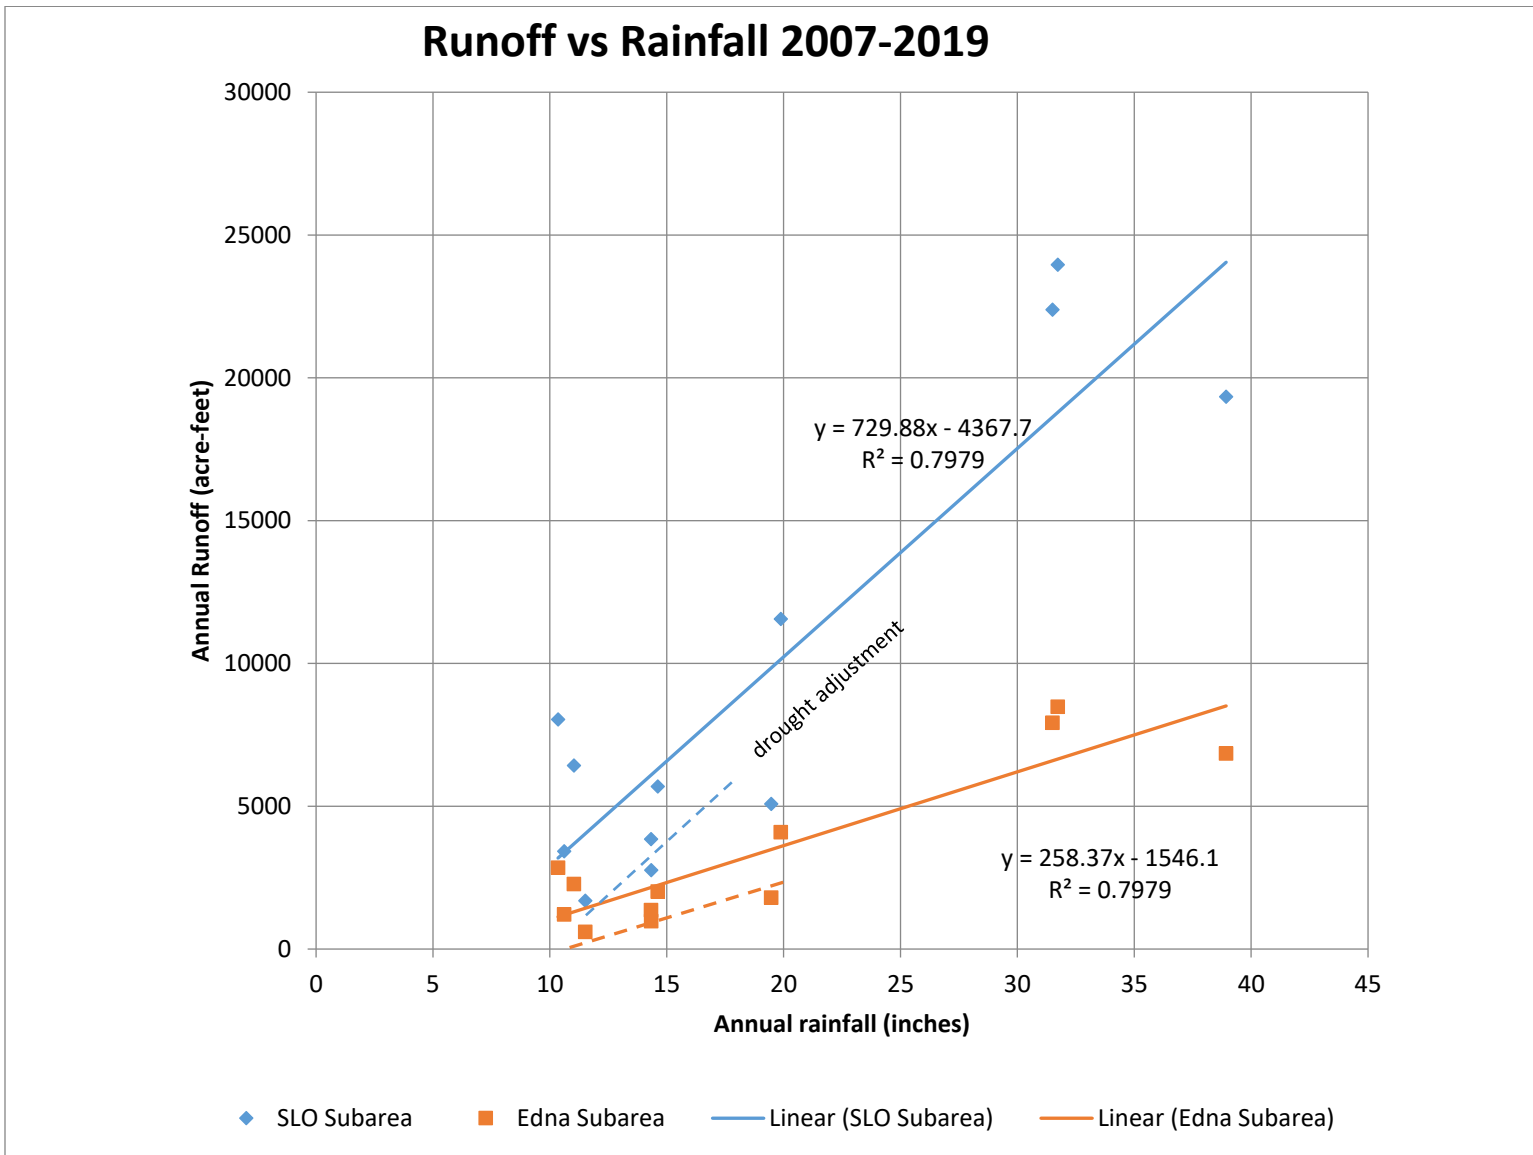


Figure 6-14: Runoff vs Rainfall Correlation for Subareas.

Stream inflow on the West Coral de Piedra sub-watershed 5 (Figure 6-13) was reduced to account for surface water diversions. There is a permitted reservoir where surface water diversion is utilized mainly for agricultural irrigation (SWRCB, 1990). The stream inflow adjustment consisted of correlating the total reported diversions from Statements of Diversion and Use between 2010 and 2018 with annual precipitation, and applying the correlation to other years in the base period (the r-squared value of the correlation 0.71) is. Reported annual surface water diversions ranged from 14 acre-feet to 900 acre-feet, with average annual diversion over the base period estimated at 350 acre-feet per year (AFY), including estimated reservoir evaporation which was added to the diversion. The resulting estimated stream inflow estimates for the historical base period are shown in the surface water budget of Table 6-1, Table 6-2, and Table 6-3.

#### **Groundwater-Surface Water Interaction (Net)**

Groundwater-surface water interactions take place primarily along stream channels. When groundwater is rising into streams (gaining reaches of a stream), the interaction is a surface water budget inflow and a groundwater budget outflow. Conversely, when stream flow is percolating to groundwater (losing reaches of a stream), the interaction is a surface water budget outflow and groundwater budget inflow. This water budget has combined the gaining and losing stream reaches into single (net) term, the result of which are net losing streams in the Basin which is an outflow component of the surface water budget and inflow component of the groundwater budget. Net groundwater-surface water interaction was estimated by adjusting the percent of stream inflow that recharges groundwater while optimizing the water balance. The optimization consisted of minimizing the sum of squares of the residual error between the calculated change in storage and measured change in storage (Section 6.3.4.1).

#### **Treated wastewater discharge to streams**

The City of San Luis Obispo discharges treated wastewater into San Luis Obispo Creek. Available records of wastewater treatment plant discharges have been compiled by water year. Daily discharge records provided by the City were compiled for water years 2001-2019. For water years 1987-2000, treated wastewater discharges were estimated as a nominal 65 percent of total City water deliveries, based on the average ratio of annual wastewater flows to water deliveries in the years 2001-2019. The treated wastewater discharges to San Luis Obispo creek are presented in the surface water budget of Table 6-1.

#### **Local Imported Supplies**

The City of San Luis Obispo imports water from three reservoirs. Surface water deliveries from Salinas and Whale Rock reservoirs occurred through the historical base period, while Nacimiento reservoir water deliveries to the City began in 2011. Surface water reservoirs have historically provided most of the water supply used by the City. Local imported water supplies are based on City records and Boyle (1991). Local imported supplies are presented in the surface water budget of Table 6-1.

Cal Poly imports surface water and also pumps groundwater for agricultural irrigation. Fields overlying and adjacent to the Basin are typically irrigated with groundwater, while imported surface water is generally used for irrigation outside of the Basin boundary. Therefore, only the local imported supplies used for potable water deliveries by the City have been accounted for in the GSP water budgets.

#### **6.3.3.2 Components of Surface Water Outflow**

The surface water budget includes the following sources of outflow:

- Evapotranspiration of Precipitation
- Evapotranspiration of Applied Water
- Infiltration of Precipitation
- Infiltration of Applied Water

- Surface Water Deliveries Offset
- Wetland/Lake ET
- Groundwater-Surface Water Interaction
- Stream outflow (runoff)

### **Evapotranspiration of Precipitation**

The fate of precipitation that falls within the Basin boundaries can be divided into three components: evapotranspiration, infiltration, and runoff. Of these three, infiltration has the greatest influence on the groundwater budget and ultimately, Basin sustainable yield. Therefore, the approach to estimating the fate of precipitation uses a methodology focused primarily on infiltration, but from which the other two components may also be estimated. This methodology is based on work by Blaney (1933, 1963), and which has been used for other analytical water budgets in major studies of central coast Basins (DWR, 2002; Fugro, 2002).

Evapotranspiration is the evaporation of water from surfaces and the transpiration of water from plants. The first seasonal rains falling on the Basin are mostly evaporated directly from surfaces (vegetative canopy, soil, urban area hardscapes) and used to replenish soil moisture deficits that accumulate during the dry season. For the Arroyo Grande – Nipomo Mesa area of the Santa Maria groundwater Basin, DWR (2002) assumed that precipitation could begin to infiltrate to groundwater (deep percolate) only after 11 inches of annual precipitation had fallen in urban and agricultural irrigation areas, and when 17 inches of rainfall had fallen in areas of native vegetation. In the Paso Robles groundwater Basin, an estimated 12 inches of annual rainfall was needed for infiltration below agricultural lands, while 18 inches of rainfall was needed for infiltration beneath native ground cover and urban/suburban areas (Fugro, 2002).

These threshold values for minimum annual rainfall prior to infiltration are assumed to approximate the annual evapotranspiration of precipitation. Once these thresholds are exceeded, infiltration to groundwater and runoff would become dominant. It is recognized that a portion of the initial annual rainfall may result in runoff, depending on rain intensity, but this is assumed to be offset by the portion of the late season rainfall that is evapotranspired. Since infiltration is the critical component of precipitation with respect to Basin safe yield, offsetting of early wet season runoff with late wet season evapotranspiration in the water budget is considered a reasonable approach.

The specific thresholds for annual rainfall that is estimated to evapotranspire prior to infiltration and runoff have been developed from Blaney's field studies. Evapotranspiration of precipitation has been estimated by multiplying land use/land cover acreages by the infiltration threshold values. Results of these estimates are shown in the surface water budget of Table 6-1, Table 6-2, and Table 6-3. Additional details of the methodology are provided in section 6.3.4.1 (Components of Groundwater Inflow).

### **Evapotranspiration of Applied Water**

The evapotranspiration of applied irrigation water has been divided into urban and agricultural sectors. Urban applied water includes residential outdoor irrigation, urban recycled water use, and golf course/play field irrigation. Much of the urban applied water is accounted for by City of San Luis Obispo or other water purveyor records. Estimation of applied water for urban and agricultural irrigation not supplied by purveyors involves a soil-moisture balance approach discussed in section 6.3.4.1 (Components of Groundwater Outflow).

Most water applied for irrigation is taken up by plants and transpired. Some water, however, is lost to evaporation or infiltrates to groundwater as return flow. The evapotranspiration of applied irrigation water has been calculated by subtracting the estimated return flow from the applied water estimates. Both

applied water and return flow estimates are presented under the historical groundwater budget section. Results of the calculations of evapotranspiration of applied water are shown in the surface water budget of Table 6-1, Table 6-2, and Table 6-3.

### **Riparian Corridor Evapotranspiration**

Riparian plant communities present along the creeks can access surface flows and creek underflow. Riparian areas are included within the native brush, trees, and grasses acreage for the subareas (Table 6-6). Besides evapotranspiration of precipitation, however, an additional 0.8 acre-feet per acre of consumptive water use is estimated for riparian corridors (Fugro, 2002; Robinson, 1958) that lie within potential Groundwater Dependent Ecosystems, which cover approximately 200 acres in the San Luis Valley subarea and 50 acres in the Edna Valley Subarea (Figure 5-15; Chapter 5). Riparian corridor water use during severe drought is reduced a nominal 50 percent to reflect lack of creek underflow. Riparian evapotranspiration is included in Table 6-1, Table 6-2, and Table 6-3.

### **Infiltration of Precipitation and Applied Water**

Infiltration of precipitation and applied water are both outflow components from the surface water budget and inflow components to the groundwater budget. Discussion of these components is provided in Section 6.3.4.1 (Components of Groundwater Inflow).

### **Surface Water Deliveries Offset**

When imported surface water is brought into the Basin from local supplies (Salinas Reservoir, Whale Rock Reservoir, and Nacimiento Reservoir), it is counted as surface water inflow. This imported water is then provided to customers through surface water deliveries from the City water treatment plant. After residential and business use, most of the delivered water is conveyed by sewer to the wastewater treatment plant for recycling and discharge into San Luis Obispo Creek. Since wastewater discharges to the creek are also counted as surface water inflow, an offset factor is needed to avoid double counting that portion of imported surface water. The surface water deliveries offset is an outflow equal to the wastewater discharges inflow and is shown in the surface water budget of Table 6-1.

### **Laguna Lake**

Laguna Lake is an approximate 100-acre open water body within the San Luis Valley subarea (Figure 3-10; Chapter 3). There are an additional 100 acres of adjacent wetlands connected to the lake. Evaporation from the water surface and transpiration by phreatophytes in the wetlands are included in the water budget as surface water outflow. Local pan evaporation is estimated at 70 inches per year (for all years), with a reservoir coefficient of 0.7, based on a review of information from nearby reservoirs (San Luis Obispo County, 2005). The resulting estimated annual evaporation rate for this water budget component is 4.1 feet (not including offset from direct precipitation). Evapotranspiration by phreatophytes were estimated to use lake water at a rate equal to irrigated pasture applied water demand. Results for Wetland/Lake ET outflow from the surface water budget are shown in Table 6-1. As with riparian water use, during severe drought the lake and wetland evapotranspiration is reduced by 50 percent.

### **Groundwater-Surface Water Interaction (Net)**

Groundwater-surface water interaction involves both surface water and groundwater budgets. The net interaction is an outflow component for the surface water budget and an inflow component for the groundwater budget (losing streams). Details of the methodology used to develop the groundwater-surface water interaction are presented in the Sections 6.3.4.1 and 6.3.6.

### **Stream Outflow from Basin**

Stream outflow from each subarea was estimated using the water balance method and compared to available flow records. No significant changes to surface water in storage are assumed in the water budget from year to year. Storm water runoff exits the Basin annually, and Laguna Lake storage fluctuations are considered minor compared to the total surface water budget. Surface water supply reservoirs are outside of the Basin boundary.

Using the water budget equation, stream outflow is estimated as the difference between total surface water inflow and all other components of surface water outflow. Results of stream outflow calculations are presented in the main water budget Tables.

There are limited annual stream flow records available for comparison to the estimates in the historical surface water budget. For the San Luis Valley subarea, the only applicable published records for stream outflow from the San Luis Valley subarea are two years of data recorded on Lower San Luis Obispo Creek at San Luis Bay Drive. In the 1971 water year, 20.46 inches of rainfall was recorded at Cal Poly and approximately 14,000 acre-feet of stream flow was reported at the San Luis Bay Drive gage (records missing in October). In the 1972 water year, 12.42 inches of rainfall was recorded at Cal Poly with 4,260 acre-feet of stream flow at the San Luis Bay Drive gage (San Luis Obispo County, 1974). These two years are outside of the historical water budget base period, and a comparison of flow for water years with similar precipitation suggests that the estimated Basin outflows are reasonable.

Measured annual flows on Pismo Creek downstream of the Basin boundary are also available for only two water years, 1991 and 1992 (Balance Hydrologics, 2008). These are years within the historical base period, although the flows were measured at Highway 101, where Pismo Creek has a watershed of 38 square miles, compared to 25 square miles upstream of the Basin boundary. Estimated outflow in the water budget from the Edna Valley subarea for 1991 and 1992 are lower than the flows measured at Highway 101, as would be expected. Table 6-7 shows the stream outflow comparisons.

**Table 6-7: Stream Outflow Comparison.**

Location	Water Year	Precipitation at Cal Poly (in.)	Flow (acre-feet)
San Luis Obispo Creek at San Luis Bay Drive gage	1971	20.46	13,705*
San Luis Valley subarea stream outflow estimate	2003	22.9	15,390
San Luis Obispo Creek at San Luis Bay Drive gage	1972	12.42	4,260
San Luis Valley subarea stream outflow estimate	1990	13.36	3,360
Pismo Creek at Highway 101 gage	1991	18.6	2,033
Edna Valley subarea stream outflow estimate			1,840
Pismo Creek at Highway 101 gage	1992	22.14	4,640
Edna Valley subarea stream outflow estimate			3,590

\*October 1970 missing – estimate 300 acre-feet = approx. 14,000 acre-feet for year

**6.3.4 Historical Groundwater Budget**

The groundwater budget includes the following sources of inflow:

- Infiltration of Precipitation
- Groundwater-Surface Water Interaction
- Subsurface Inflow
- Infiltration of Applied Water

The groundwater budget includes the following sources of outflow:

- Groundwater Extractions
- Subsurface Outflow
- Groundwater-Surface Water Interaction

#### **6.3.4.1 Components of Groundwater Inflow**

##### **Infiltration of Precipitation**

Infiltration of precipitation refers to the amount of rainfall that directly recharges groundwater after moving through the soil and unsaturated zone (Figure 6-2). Direct measurement of infiltration has not been performed in the Basin, and estimates have been prepared based on prior work by Blaney (1933) in Ventura County Basins and Blaney et al. (1963) in the Lompoc Area. These studies involved soil moisture measurements at rainfall penetration test plots with various types of land cover, and the resulting deep percolation versus rainfall correlations have been considered applicable to central coast Basins (DWR, 2002; Fugro, 2002). The work by Blaney is several decades old, however, modeling efforts have shown the generalizations are relatively accurate for semi-arid climates (Rosenberg, 2001). The main advantage of Blaney's approach is that it is based on direct measurements of infiltration of precipitation.

Criteria based on Blaney et al. (1963) were used for analytical water budgets in the Santa Maria Valley and Tri-Cities Mesa areas, where it was assumed that precipitation could infiltrate only in urban and agricultural areas when 11 inches of precipitation had fallen annually, and on areas of native vegetation when 17 inches of precipitation had fallen annually. Any amount of rainfall above 30 inches annually was not considered to contribute to deep percolation of precipitation, regardless of the land use classification (DWR, 2002). Correlations between infiltration and annual rainfall based on Blaney (1933) were also used for the 2002 Paso Robles groundwater Basin analytical water budget (Fugro, 2002).

Estimates for infiltration of precipitation for the SLO Basin have been developed by applying Blaney correlations that restrict deep percolation to precipitation in agricultural areas that occurs after 11-12 inches of rainfall, and in native vegetation areas after approximately 18 inches of rainfall. Native vegetation was the most restrictive land cover for infiltration when tested by Blaney due to high initial soil moisture deficiencies.

Urban areas were not part of the original studies by Blaney. The low permeability of hardscape (buildings and paving) limits infiltration and increases surface evaporation, compared to other types of land cover, but hardscape also increases runoff, which can lead to greater infiltration in adjacent areas receiving the runoff. Therefore, the infiltration threshold was set higher than irrigated agricultural land, but not as high as native grasslands. The Blaney correlation that produces infiltration between irrigated agriculture and native grassland is the curve for non-irrigated grain, with an infiltration threshold of approximately 14 inches of rainfall. Figure 6-15 plots the data collected by Blaney (1933).

As with prior work by the DWR in northern Santa Barbara and southern San Luis Obispo Counties, rainfall above 30 inches was not considered to contribute to deep percolation in the Basin (DWR, 2002). Infiltration of precipitation results are shown in the water budget tables and graphs.

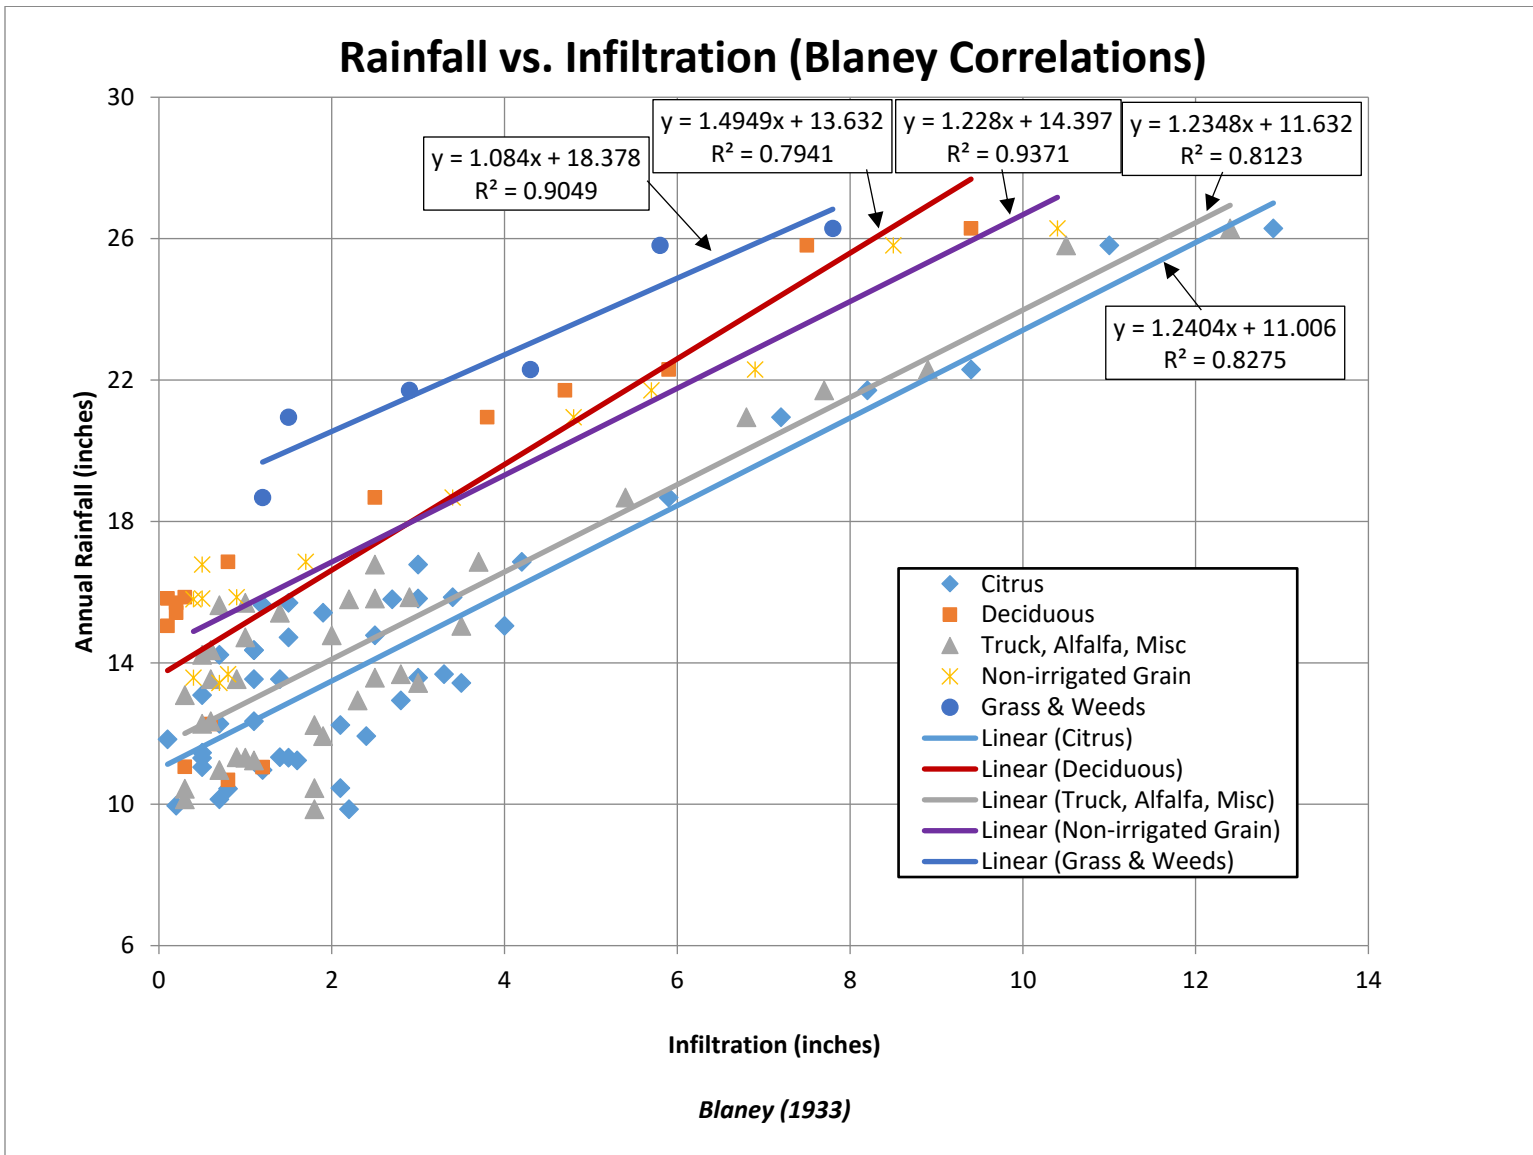


Figure 6-15: Rainfall vs Infiltration.



The land use classifications for which infiltration thresholds have been developed for this GSP include citrus, deciduous, pasture, vegetable, vineyard, native brush/grassland (includes riparian corridors), wetland, urban developed/open space, and Urban turf. The minimum rainfall needed before infiltration of precipitation can occur for various land uses and covers are summarized in Table 6-8.

**Table 6-8: Minimum Rainfall for Infiltration.**

Land Use/Cover	Infiltration Threshold (in.)
Citrus	11.0
Deciduous	13.6
Pasture	11.6
Vegetable	11.6
Vineyard	13.6
Native brush/grassland	18.4
Wetland*	11.6
Urban developed/open space	14.4
Urban turf	11.6

\* ET of precip. prior to runoff (no infiltration)

Wetland soils are assumed to be close to field capacity due to shallow groundwater and the infiltration threshold is only used for estimating ET in the surface water budget, with the remaining precipitation as runoff (mainly into Laguna Lake).

**Groundwater-Surface Water Interaction (Net)**

As previously mentioned, groundwater-surface water Interaction involves both components of the surface water and groundwater budgets. The net interaction is an outflow component of the surface water budget and inflow component of the groundwater budget (losing streams).

The groundwater-surface water interaction component is estimated using a mass balance approach for the Edna Valley subarea by adjusting the percent of stream inflow that percolates to groundwater (as Basin recharge) while minimizing the sum of squares of the residual error between the calculated change in storage and the measured change in storage (specific yield method) for multiple years. A similar optimization was performed for the San Luis Valley subarea except a variable percentage was used depending on the type of year (a greater percentage of stream flow percolation during lower rainfall years). A spill mechanism was developed in the budget to allow groundwater outflow to streams when storage reached full capacity, which was set to a nominal 37,000 acre-feet based on historical storage estimates using the specific yield method. The groundwater-surface water interaction estimates are in the water budget tables. Additional details of the calibration methodology used to minimize the residual error are presented in Change in Storage (Section 6.3.6).

**Subsurface inflow**

Subsurface inflow from bedrock surrounding the groundwater Basin flows into both subareas. Subsurface inflows were estimated using Darcy’s Law, which is an empirical formula describing the flow of fluid through a porous material, and expressed as:

$$Q = -K \frac{dh}{dl} A$$

Where:

Q = groundwater discharge rate through a cross-sectional area of the porous material

K = hydraulic conductivity of the material

$\frac{dh}{dl}$  = hydraulic gradient at the cross-section


A = cross-sectional area

The negative sign denotes that flow is in the direction of decreasing pressure. Since groundwater pressures are greater within the bedrock hills surrounding the Basin than beneath the alluvial valleys, there is subsurface inflow to the Basin from bedrock. Similarly, groundwater elevations in the Edna Valley subarea are greater than in the San Luis Valley subarea and the direction of subsurface flow is from the Edna Valley to the San Luis Valley. The application of Darcy’s Law to estimate subsurface inflow from bedrock involves simplification and assumptions of uniformity in the subsurface. The Basin boundary was divided into six reaches, each representing different boundary conditions. Cross-sectional areas for boundary flows were based on the length of each reach times the average thickness of adjacent saturated Basin sediments determined from cross-sections presented in Chapter 4. Hydraulic gradients for each reach were developed by averaging topographic slopes between a line along the Basin boundary and a line drawn at a 5,000-foot setback from the Basin boundary, and assuming the hydraulic gradient paralleled these slopes. Hydraulic conductivity was estimated for each reach based on the bedrock type, a review of pumping test data in the SLO Basin Characterization Report (GSI, 2018), and structural features. Table 6-9 summarizes the results of subsurface inflow estimates. Bedrock subsurface inflow reaches are shown on Figure 6-16.

**Table 6-9: Subsurface Inflow Estimates.**

Reach	Bedrock Formation	Boundary description	Length	Thickness	Hydraulic gradient	Hydraulic conductivity	Inflow
			ft	ft	ft/ft	ft/day	AFY
1	KJf melange w/serp.	Depositional	43,900	100	0.05	0.05	90
2	Monterey/Lower Pismo	Edna fault	38,100	200	0.01	0.03	30
3	KJf melange w/serp.	Depositional	88,300	20	0.09	0.05	130
4	JKf metavolcanics	Los Osos fault	28,600	40	0.09	0.2	220
5	KJf melange w/serp.	Los Osos fault	12,200	60	0.05	0.05	20
6	Obispo/Rincon w/ serp.	Depositional	9,500	60	0.06	0.05	10
Note: KJf - Franciscan Assemblage				San Luis Valley subarea			320
Serp. = serpentinite				Edna Valley subarea			110
AFY = acre-feet per year				Basin total			430

Basin boundary types for evaluating subsurface inflow are depositional or fault-bounded. Depositional boundaries occur where Basin sediments gradually thin toward the Basin boundary, while fault boundaries are where Basin sediments are abruptly offset by faulting. Fault boundaries are generally on the south side

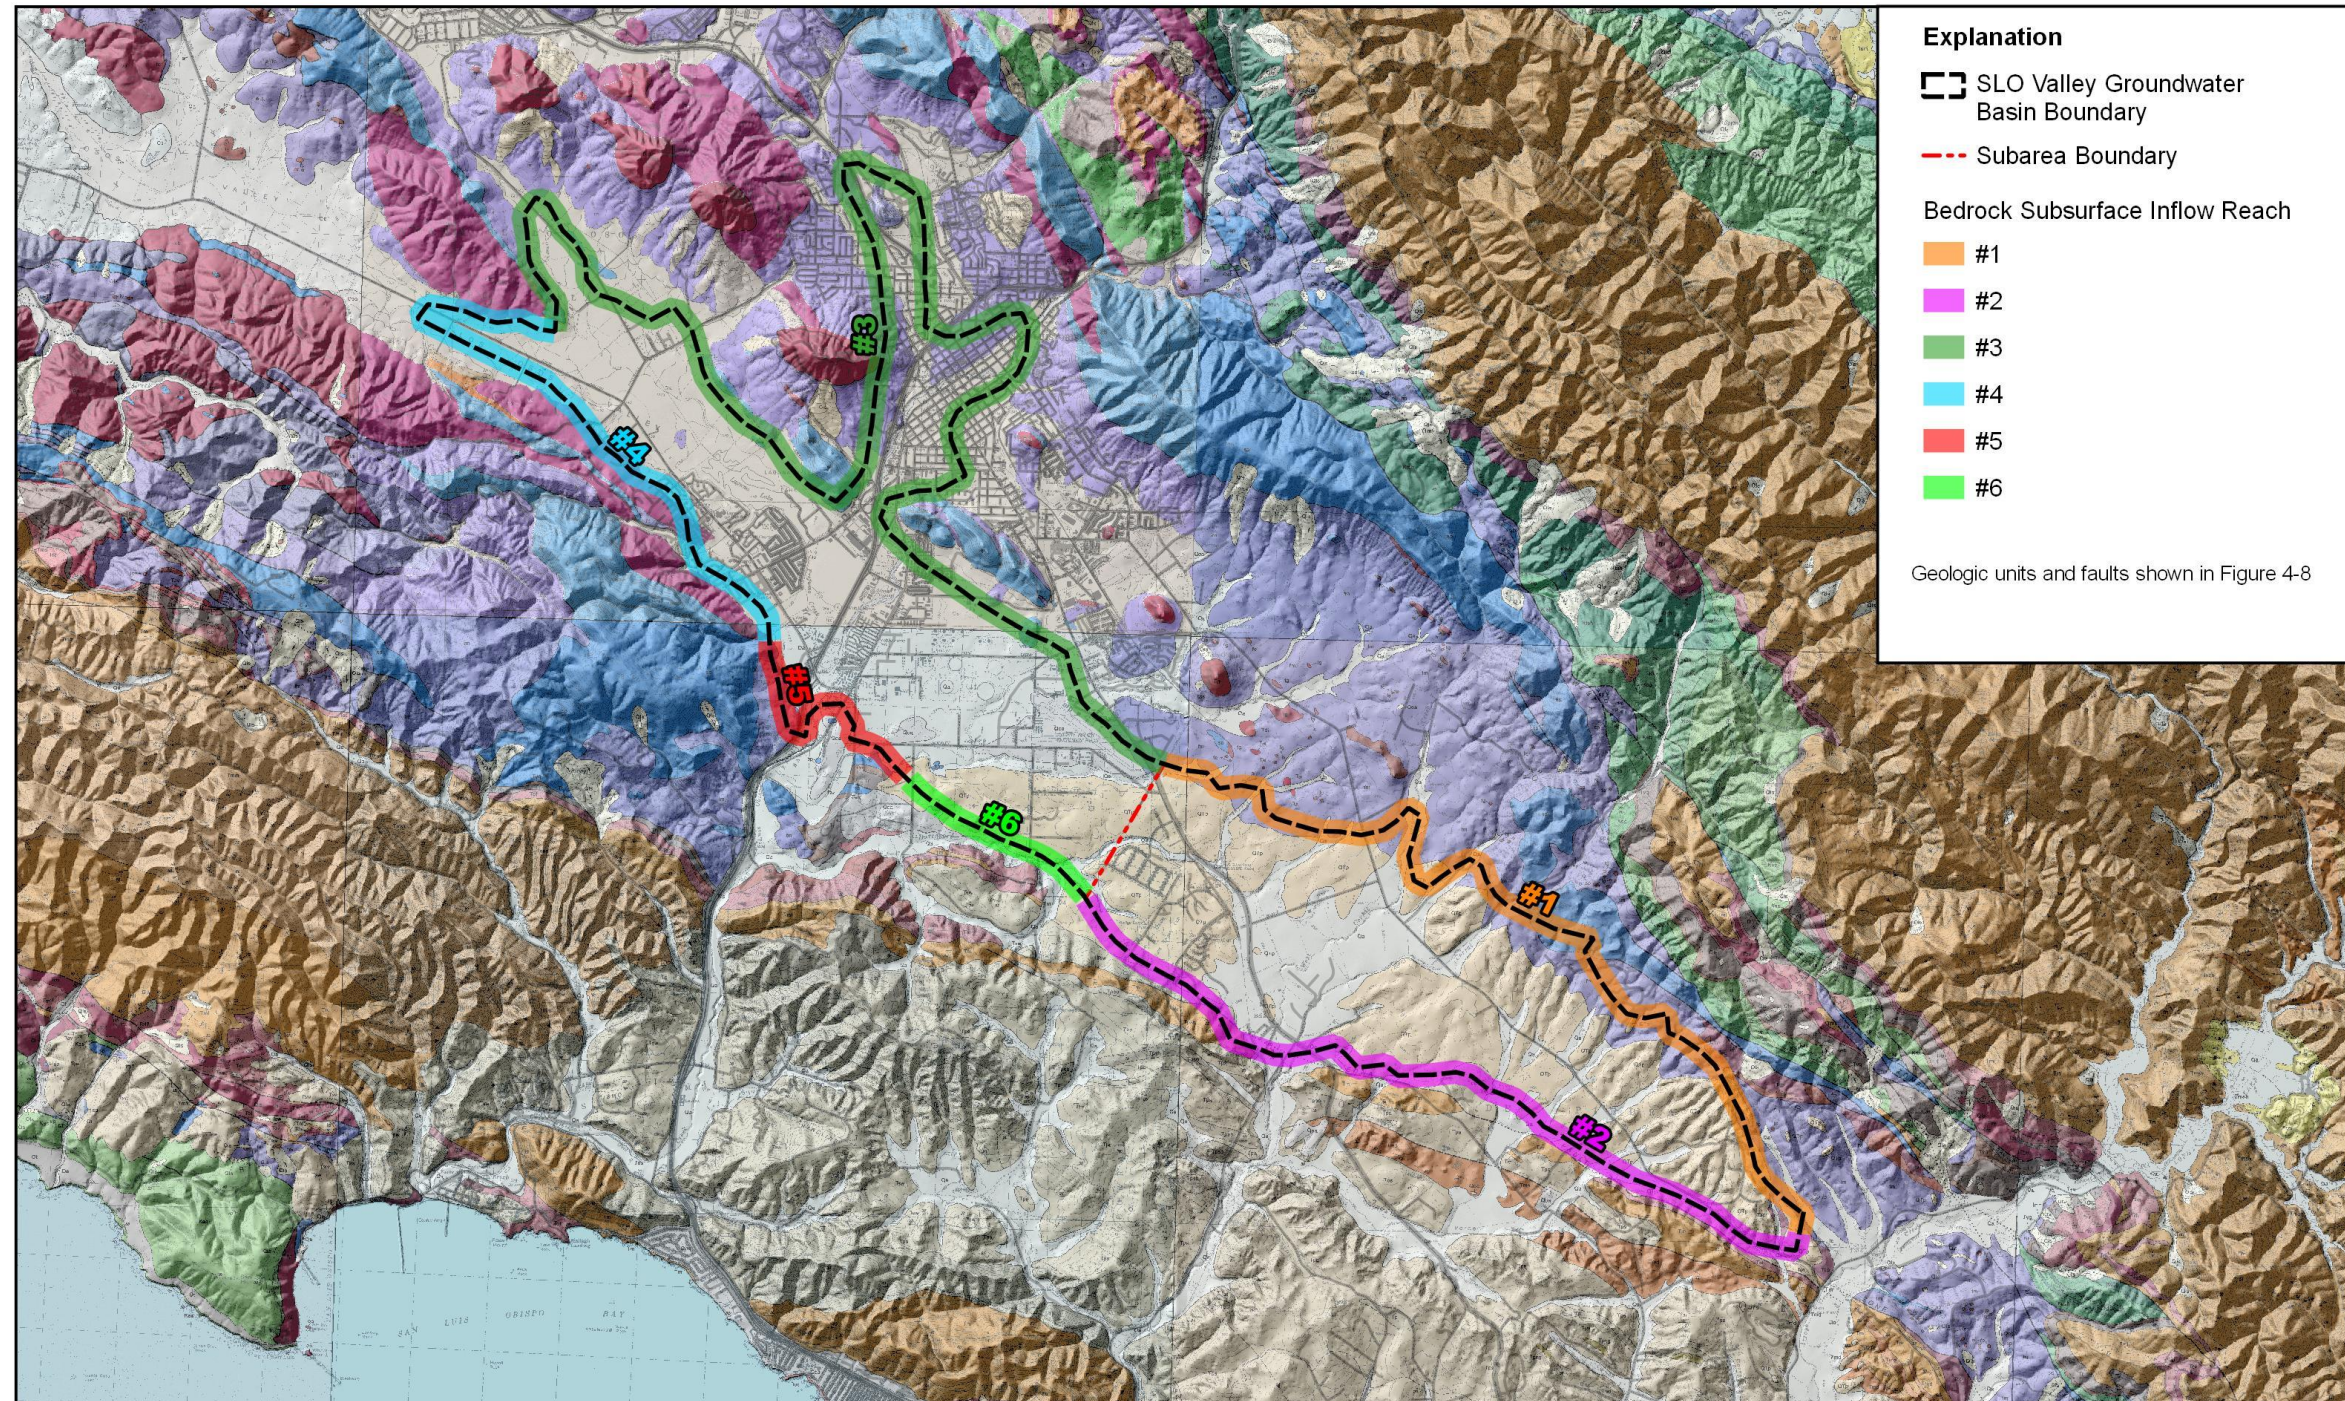

**Explanation**

- SLO Valley Groundwater Basin Boundary
- Subarea Boundary

**Bedrock Subsurface Inflow Reach**

- #1
- #2
- #3
- #4
- #5
- #6

Geologic units and faults shown in Figure 4-8

Prepared For:  
 COUNTY OF SAN LUIS OBISPO  
 CITY OF SAN LUIS OBISPO  
 SAN LUIS OBISPO VALLEY BASIN GSP

Author: TK  
 Date: 06/18/2020

N

0 0.5 1 1.5 2 km  
 0 0.5 1 1.5 2 mi

**References:**

1. Coordinate System: State Plane California V FIPS 0405 Feet
2. Projection: Lambert Conformal Conic
3. Horizontal Datum: NAD 83
4. Vertical Datum: NAVD 88
5. Basemap: Dibble (DF-129, DF-130, DF-210, DF-211, DF-212, DF-213, DF-214)

**Notes:**

- 1.
- 2.
- 3.

**Bedrock Subsurface Inflow Reaches**

Figure 6-16

of the Basin, while depositional boundaries are on the north side (see geologic-cross sections in Chapter 4). Thicknesses at the Basin boundary are estimated from Basin cross-sections (Chapter 4).

The hydraulic conductivity of bedrock across the Basin boundary was estimated at a nominal 0.05 feet per day, with two exceptions (Table 6-9). The Franciscan Assemblage metavolcanics are more permeable where fractured along the Los Osos fault zone (southwest Basin boundary; Figure 4-8), and are assigned a greater hydraulic conductivity. The Edna fault (Figure 4-8) offsets sedimentary beds along the Basin boundary and is interpreted to create a barrier to groundwater flow, corresponding to lower permeability.

Subsurface inflow to the San Luis Valley subarea also takes place as Basin cross-flow from the Edna Valley subarea. A subsurface profile of the bedrock high was developed as part of this GSP using geophysical methods (CHG, 2019). Darcy's Law was used to estimate subsurface flow based on a cross-sectional area of 140,000 square feet (approximately 3,500 feet in length and 40 feet saturated depth), a typical hydraulic gradient perpendicular to the boundary of 0.004 feet per foot (average of high and low values from 1986 and 2019 water level contour maps) and an estimated hydraulic conductivity for the sediments of 7 ft/day from local pumping tests listed in the SLO Basin Characterization Report (GSI,2018). The resulting estimated average subsurface cross-flow from the Edna Valley subarea to the San Luis Valley subarea is 30 AFY.

#### **Infiltration of Applied Water (Return Flows)**

Estimates for infiltration of applied water include urban return flow and agricultural return flow. Urban return flow comes from water delivered for domestic or commercial/industrial uses that infiltrates to groundwater, mainly through landscape/turf irrigation and septic system discharges (includes suburban/rural residential return flow and recycled water return flow). Urban return flow does not include City wastewater that is discharged to San Luis Obispo Creek, which is accounted for in the surface water budget. Agricultural return flows come from applied irrigation water to crops.

The first step in estimating urban return flows was to separate all delivered water (groundwater pumped from the Basin and imported surface water supplies) into indoor and outdoor use. An estimated 5 percent of indoor use is assumed to be consumptive use (95 percent return flow; EPA, 2008), while 85 percent of outdoor use is consumed (15 percent return flow) based on the typical range of estimates for other local Basins (DWR, 2002; Fugro, 2002). Almost all Indoor water use drains to septic systems or sewer systems. Outdoor water use is generally for irrigation, most of which evapotranspires into the atmosphere.

The distribution of indoor to outdoor water use will vary based on the user. City customers are estimated to average 70 percent indoor use and 30 percent outdoor use, based on approximately 65 percent of delivered water reaching the wastewater treatment plant (with 5 percent indoor consumptive use). Large parcel residential water users outside of City limits tend to use a greater percentage of water for outdoor use than City residents. Businesses served by small water companies can have a wide range of indoor and outdoor distribution, and were assigned values based on the results of a local study on business water use (City of San Luis Obispo, 2000).

The indoor and outdoor water use and associated return flows from water use by City, suburban/rural residential, and small water systems were compiled, together with estimated return flow from recycled water use. Infiltration of Applied Water estimates for urban and agricultural sectors are presented in the historical water budget Table 6-1, Table 6-2, and Table 6-3.

### **6.3.4.2 Components of Groundwater Outflow**

#### **Urban Groundwater Extractions**

Groundwater extraction from wells is the primary component of outflow in the groundwater budget. Estimates for historical pumping were derived from various sources, including purveyor records, land use data and water duty factors, and daily soil-moisture budgets. Available purveyor records (meter records) were obtained from the following Basin users:

- City of San Luis Obispo
- Golden State Water Company
- Edna Valley East Mutual Water Company
- Varian Ranch Mutual Water Company

Production records ranged from weekly to quarterly, and were compiled to reflect the water year per GSP requirements. The City used groundwater from wells between 1989 and 2014, with the highest use in water years 1990, 1991, and 1992, averaging 1,830 AFY. Overall City groundwater use averaged 405 AFY between 1989 and 2014. Golden State Water Company averaged 335 AFY over the historical base period (1987-2019), although average water use over the last 5 water years is approximately 210 AFY. Edna Valley East MWC and Varian Ranch MWC have averaged approximately 100 AFY combined since reaching full development in the late 1990s, with 80 AFY combined over the last 5 years.

There are also 42 small water systems, mostly in the San Luis Valley subarea, which use groundwater from wells. Each water system was assigned a use category, and a corresponding water use factor. For example, groundwater use for commercial service connections were assigned water use based on building square footage (from aerial image review), with a 0.06 acre-foot per year per square foot use factor. Water use factors for local use categories were obtained from the results of a study conducted by the City of San Luis Obispo utilities conservation office (SLO City, 2000). The water use estimate was developed for current conditions, as almost all water companies were active throughout the historical base period. The total amount of water used by small water systems in the Basin is estimated at 270 AFY, with the majority of use (260 AFY) in the San Luis Valley subarea. Less than 10 of the 42 small water systems using groundwater are connected to the City sewer.

Urban groundwater extractions have also been used for golf course irrigation (turf). Laguna Lake golf course was served by groundwater wells through 2007, with recycled water use from the City beginning in 2008. San Luis Country Club uses a combination of recycled water use from County Service Area 18 and groundwater. The groundwater extractions and recycled water use components of urban turf irrigation are accounted for separately in the water budget. Estimates for turf irrigation water demand used the same daily soil moisture balance program as crop irrigation (see Agricultural Irrigation).

#### **Rural Residential Groundwater Extractions**

Rural residential groundwater use was estimated based on the number of residences identified on aerial images outside of water company service areas. Each rural residence was assigned a water use of 0.8 AFY, consistent with the San Luis Obispo County Master Water Plan (Carollo, 2012). As a comparison, the City study reported residential use for large parcels (>0.26 acres) at 0.6 AFY (City of San Luis Obispo, 2000), which is similar to the average estimated use per service connection in the Golden State Water Company service area over the historical base period. Water use per connection at Varian Ranch MWC and Edna Valley East MWC has ranged from 0.6 to 1.5 AFY, averaging approximately 1 acre-foot per year over the historical base period defined in Section 6.1.1.

Aerial images for 1986, 1994, 2009, and 2018 were reviewed for rural residential development. The estimated number of residences outside of water company service areas was compiled, and resulting computed rural residential water use for these years is presented in Table 6-10.

**Table 6-10: Rural Residential Water Use.**

Year	SLO subarea	Edna Subarea	Basin Total
	Estimated Number of Residences <sup>1</sup>		
1986	108	54	162
1994	119	61	180
2009	162	145	307
2018	173	158	331
	Estimated Water Use (AFY) <sup>2</sup>		
1986	86	43	130
1994	95	49	144
2009	130	116	246
2018	138	126	265

<sup>1</sup>outside of water company service areas

<sup>2</sup>based on 0.8 AFY per residence

**Agricultural Groundwater Extractions**

Groundwater use for agricultural irrigation has been estimated using the DWR Consumptive Use Program Plus (CUP+; DWR, 2015) which is a crop water use estimator that uses a daily soil moisture balance. CUP+ was developed as part of the 2013 California Water Plan Update to help growers and agencies estimate the net irrigation water needed to produce a crop.

Daily climate data from CIMIS Station #52 (San Luis Obispo) from 1986 to 2019 were used by the CUP+ program, along with estimates for various crop and soil parameters. The climate data is used to determine local reference evapotranspiration (ET<sub>o</sub>) on a daily basis. Crop coefficients are then estimated for up to four growth stages (initial, rapid, mid-season, late-season) which determine the crop evapotranspiration (ET<sub>c</sub>) values. Lastly, the CUP+ program uses variables related to the soil and crop type to determine the estimated applied water demand (ET<sub>aw</sub>), which is equivalent to the net irrigation requirement. Figure 6-17 shows the annual ET<sub>aw</sub> for various crops during the historical base period, along with the reference evapotranspiration (ET<sub>o</sub>) and precipitation at CIMIS Station #52.

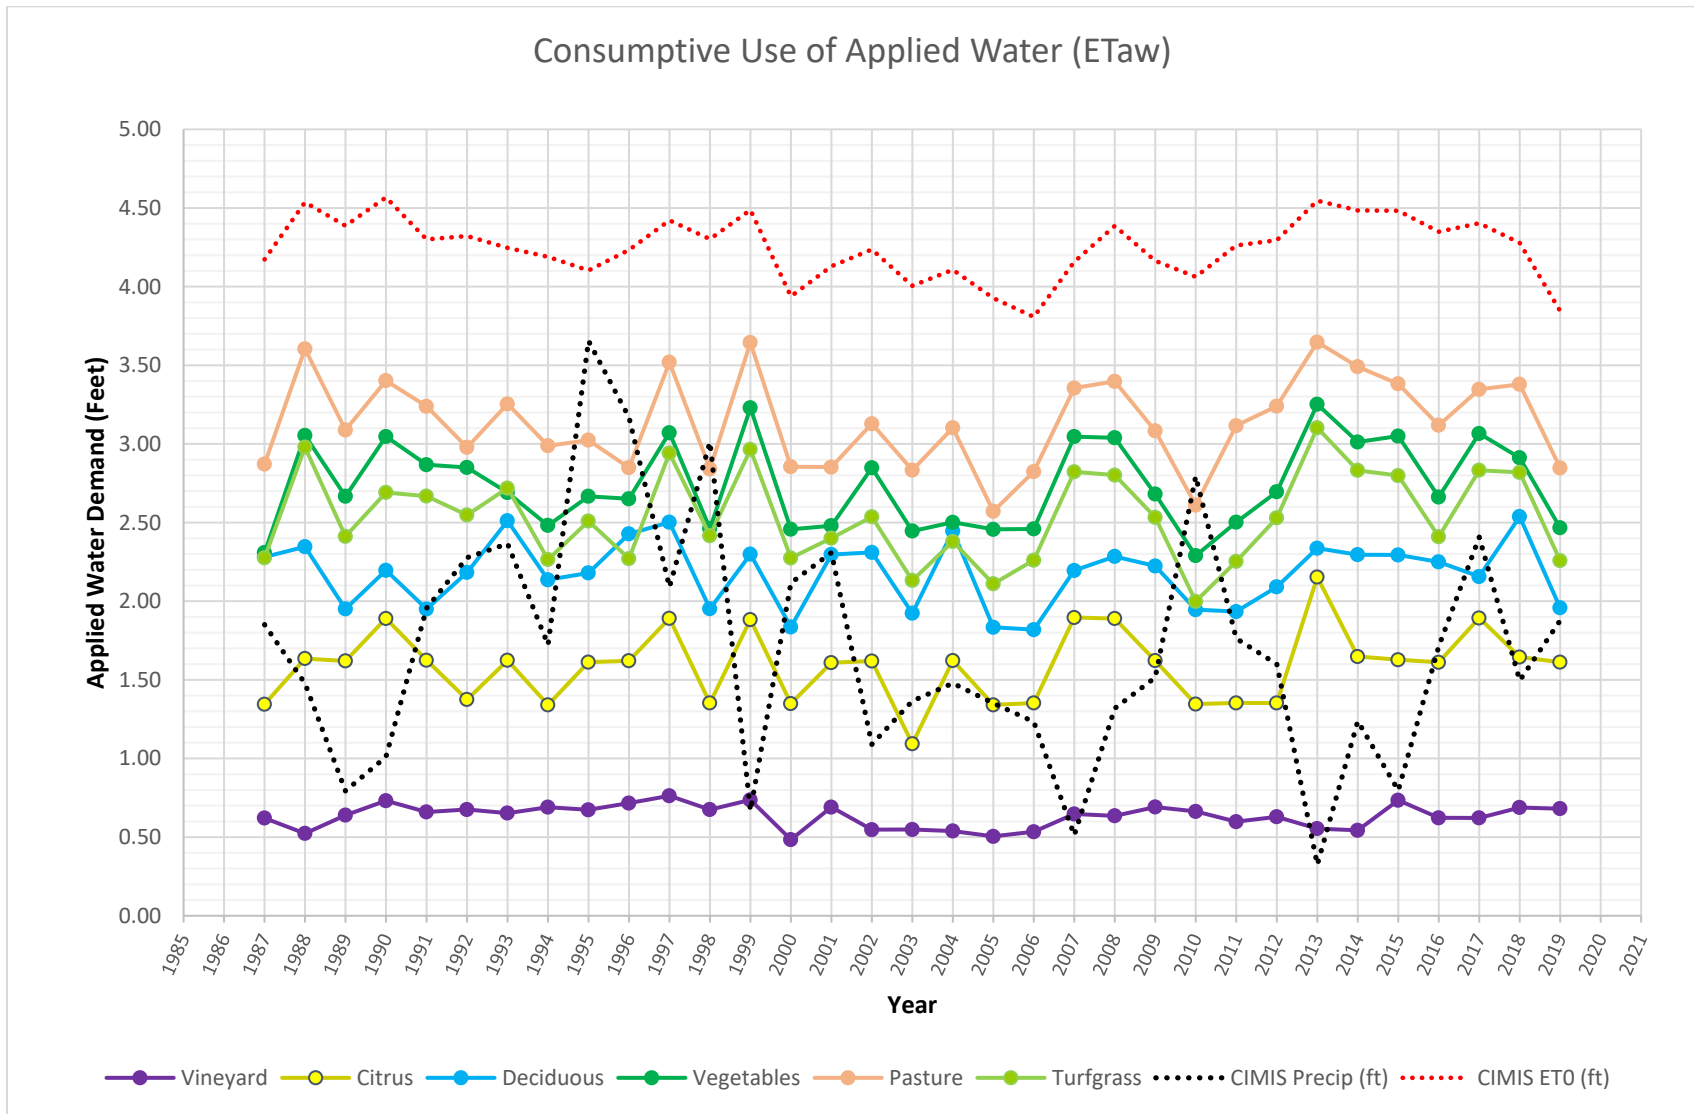


Figure 6-17: Consumptive Use of Applied Water.

Crop types were grouped according to the classification used by County Agricultural Commissioner’s Office for crops overlying the Basin. These crop types included citrus, deciduous (non-vineyard), pasture, vegetable, and vineyard. A turf grass classification was added for estimating Urban sector water demand served by groundwater. The CUP+ program provides monthly water demand for each crop type during the hydrologic base period (1987-2019). Low, medium, and high consumptive use of applied irrigation water estimates are presented in Table 6-11. Low and high consumptive use are the respective annual minimum and maximum estimates over the base period, while medium consumptive use is the average. The CUP+ applied water requirement for vegetables was reduced by 40 percent to account for fallow acreage, which is not in production at any given time, based on historical aerial image review.

**Table 6-11: Consumptive Use of Applied Water.**

Crop Type	Acre-feet per acre per year		
	Low	Med	High
Citrus	1.1	1.6	2.2
Deciduous	1.8	2.2	2.5
Pasture	2.6	3.1	3.7
Vegetables*	1.4	1.6	2.0
Vineyard	0.5	0.6	0.8
Turfgrass	2	2.6	4.1

\*60 percent of ETaw to account for fallow fields

As previously discussed in section 6.3.2 (Historical Land Use), the distribution of crop acreage was determined by a review and correlation of DWR and County crop surveys with aerial imagery. Crop acreages were interpolated between the years with data.

Applied water demand volumes were calculated by multiplying the annual acreage for each crop by the average annual applied water demand during each year. The final applied water estimates used for the water budget were adjusted to include efficiency (with system leakage) factors of 80 percent for drip/micro emitter and high-efficiency sprinkler irrigation (citrus, deciduous, vineyard, and turfgrass) and 75 percent for mostly sprinkler with some drip irrigation (pasture and vegetables). The estimated groundwater extractions for agricultural water use are shown in the main water budget Table 6-1, Table 6-2, and Table 6-3.

**Wetland Direct ET**

There are approximately 570 acres of wetlands and open water in the San Luis Obispo subsurface (Table 6-6), of which approximately 100 acres are open water and 100 acres are wetlands directly connected to Laguna Lake (based on aerial image review) and part of the surface water budget. The remaining 370 acres of wetlands, most of which extend northwest of Laguna Lake into the Los Osos Valley, are assumed to be areas with seasonally shallow groundwater where evapotranspiration by native grasses effectively draws from the groundwater reservoir.

The water demand of wetlands through direct groundwater use is assumed to be equivalent to average consumptive use of irrigated pasture as shown in Table 6-11. Any rainfall over 11.6 inches (Table 6-8) also contributes to meeting wetland water demand. Wetland direct ET estimates are shown in Table 6-1.

**Subsurface Outflow**

Subsurface outflow from Basin sediments occurs as underflow along the main creek channels (San Luis Obispo Creek and Pismo Creek). Outflow volumes were estimated using Darcy’s Law (see Subsurface Inflow in Section 6.3.4.2). Table 6-12 presents the parameters used for subsurface outflow estimates.



**Table 6-12: Subsurface Outflow Estimates.**

Location	Cross-sectional Area	Hydraulic gradient	Hydraulic conductivity	Outflow
	ft <sup>2</sup>	ft/ft	ft/day	AFY
San Luis Obispo Creek	46,800	0.004	65	100
Pismo Creek*	20,600	0.01	20	35

\*begins at confluence of West Corral and East Corral de Piedra Creeks (Figure 4-2; Chapter 4)

Cross sectional areas for outflow were based on the estimated width and saturated depth of alluvial deposits in the vicinity of where the creeks exit the groundwater Basin. Hydraulic gradients are the approximate grade of the stream channel, and the hydraulic conductivities are based on pumping tests (GSI, 2018; CHG, 2018). Additional subsurface outflow from the San Luis Valley subarea occurs along Davenport Creek and East Fork Creek, but would be significantly less than San Luis Obispo Creek due to shallower and less permeable alluvial deposits. Total average subsurface outflow from the San Luis Valley subarea is estimated at 100 AFY from San Luis Obispo Creek and a nominal 20 AFY from the smaller tributaries, for a total of 120 AFY. Subsurface outflow from the Edna Valley subarea along the Canada Verde drainage and tributaries is estimated to be similar to Pismo Creek (35 AFY), for a total subsurface outflow from that subarea of 90 AFY (35 AFY each from Pismo Creek and Canada Verde, and 20 AFY cross-flow through the bedrock high; see Subsurface Inflow section above).

### 6.3.5 Total Groundwater in Storage

Groundwater is stored within the pore space of Basin sediments. The Specific yield is a ratio of the volume of pore water that will drain under the influence of gravity to the total volume of saturated sediments. The specific yield method for estimating groundwater in storage is the product of total saturated Basin volume and average specific yield. Calculation of total groundwater in storage for selected years was performed based on the specific yield method.

Estimates of specific yield for Basin sediments were obtained based on a review of 21 representative well logs. The lithology for each well log was correlated with specific yield values reported for sediment types in San Luis Obispo County (Johnson, 1967). A summary of the correlations is shown in Table 6-13. Locations of well logs used for the specific yield correlations are shown in the referenced cross-sections from the SLO Basin Characterization Report (GSI, 2018).

Groundwater in storage calculations were performed for the Spring conditions of 1986, 1990, 1995, 1998, 2011, 2014, and 2019 using the specific yield method. Water level contours for each year were prepared based on available water level data from various sources, including the County water level monitoring program, Geotracker Groundwater Information System data, groundwater monitoring reports, Stakeholder provided information, and Environmental Impact Reports. Water level contour maps for the Spring 1986 and Spring 2019 are shown in Figure 6-18 and Figure 6-19.


The water level contours for storage calculations extend to the Basin boundaries. Groundwater levels in the San Luis Valley subarea may contour at, or slightly above, ground surface in areas where wetlands are present, and there are no major differences between Spring 1986 and Spring 2019 water levels. In the Edna Valley subarea, water level contours show some notable areas of decline between 1986 and 2019 near the intersection of Edna Road (Highway 227) and Biddle Ranch Road and at the southeast end of the Basin. Declines in these areas are also shown for other time intervals in Figure 5-8 and 5-9 of Chapter 5. Of note, however, is that Spring 2019 water levels shown in Figure 6-18 are lower near the intersection of

Edna and Biddle Ranch Road than for the same period shown in Figure 5-6 (Chapter 5). This is because Figure 5-6 contours pressure in a shallow alluvial aquifer in this area while Figure 6-19 contours pressure in the deeper Pismo Formation aquifer that is the main supply aquifer for irrigation, and more appropriate for water budget storage calculations.

**Table 6-13: Specific Yield Averages.**

Well ID	Basin Cross-Section	Aquifer Specific Yield (percent)		
		Qal	QTp	Pismo
139405	B-B'	3.0	4.7	
158599	G-G'	6.8	6.9	18.0
279128	C2-C2'	11.0		
279130	A1-A2	8.2	6.5	3.0
287786	C1-C1'	7.2		
319126	C1-C1'	5.5	11.7	
438979	A1-A2	4.4	8.1	
469906	A3-A4		12.0	10.7
529099	E-E'		8.1	11.2
68734	A2-A3		5.9	8.0
710817	G-G'	3.0	5.0	10.8
73143	A1-A2	12.7	5.8	
782309	A2-A3	7.1	10.5	15.8
782656	D-D'	5.0	16.0	
e026022	H-H'		7.4	18.6
e0047435	G-G'	6.6	4.5	17.6
e0115806	offset I-I'		9.1	16.2
e0161526	F-F'		5.4	15.6
e0183287	H-H'	3.0	7.0	
e0225875	A2-A3	3.6	17.3	10.1
TH1	C1-C1'	5.9	8.9	18.0
Average Specific Yield		6.2	8.5	13.4
Basin Average (weighted)		10.5		
San Luis Valley Subarea (weighted)		8.0		
Edna Valley Subarea (weighted)		11.7		


Notes: Cross-sections shown in SLO Basin Characterization Report (GS1, 2018)  
 Qal = alluvium; QTp = Paso Robles Formation; Pismo = Pismo Formation  
 Weighted averages based on penetrated thicknesses of aquifer type.

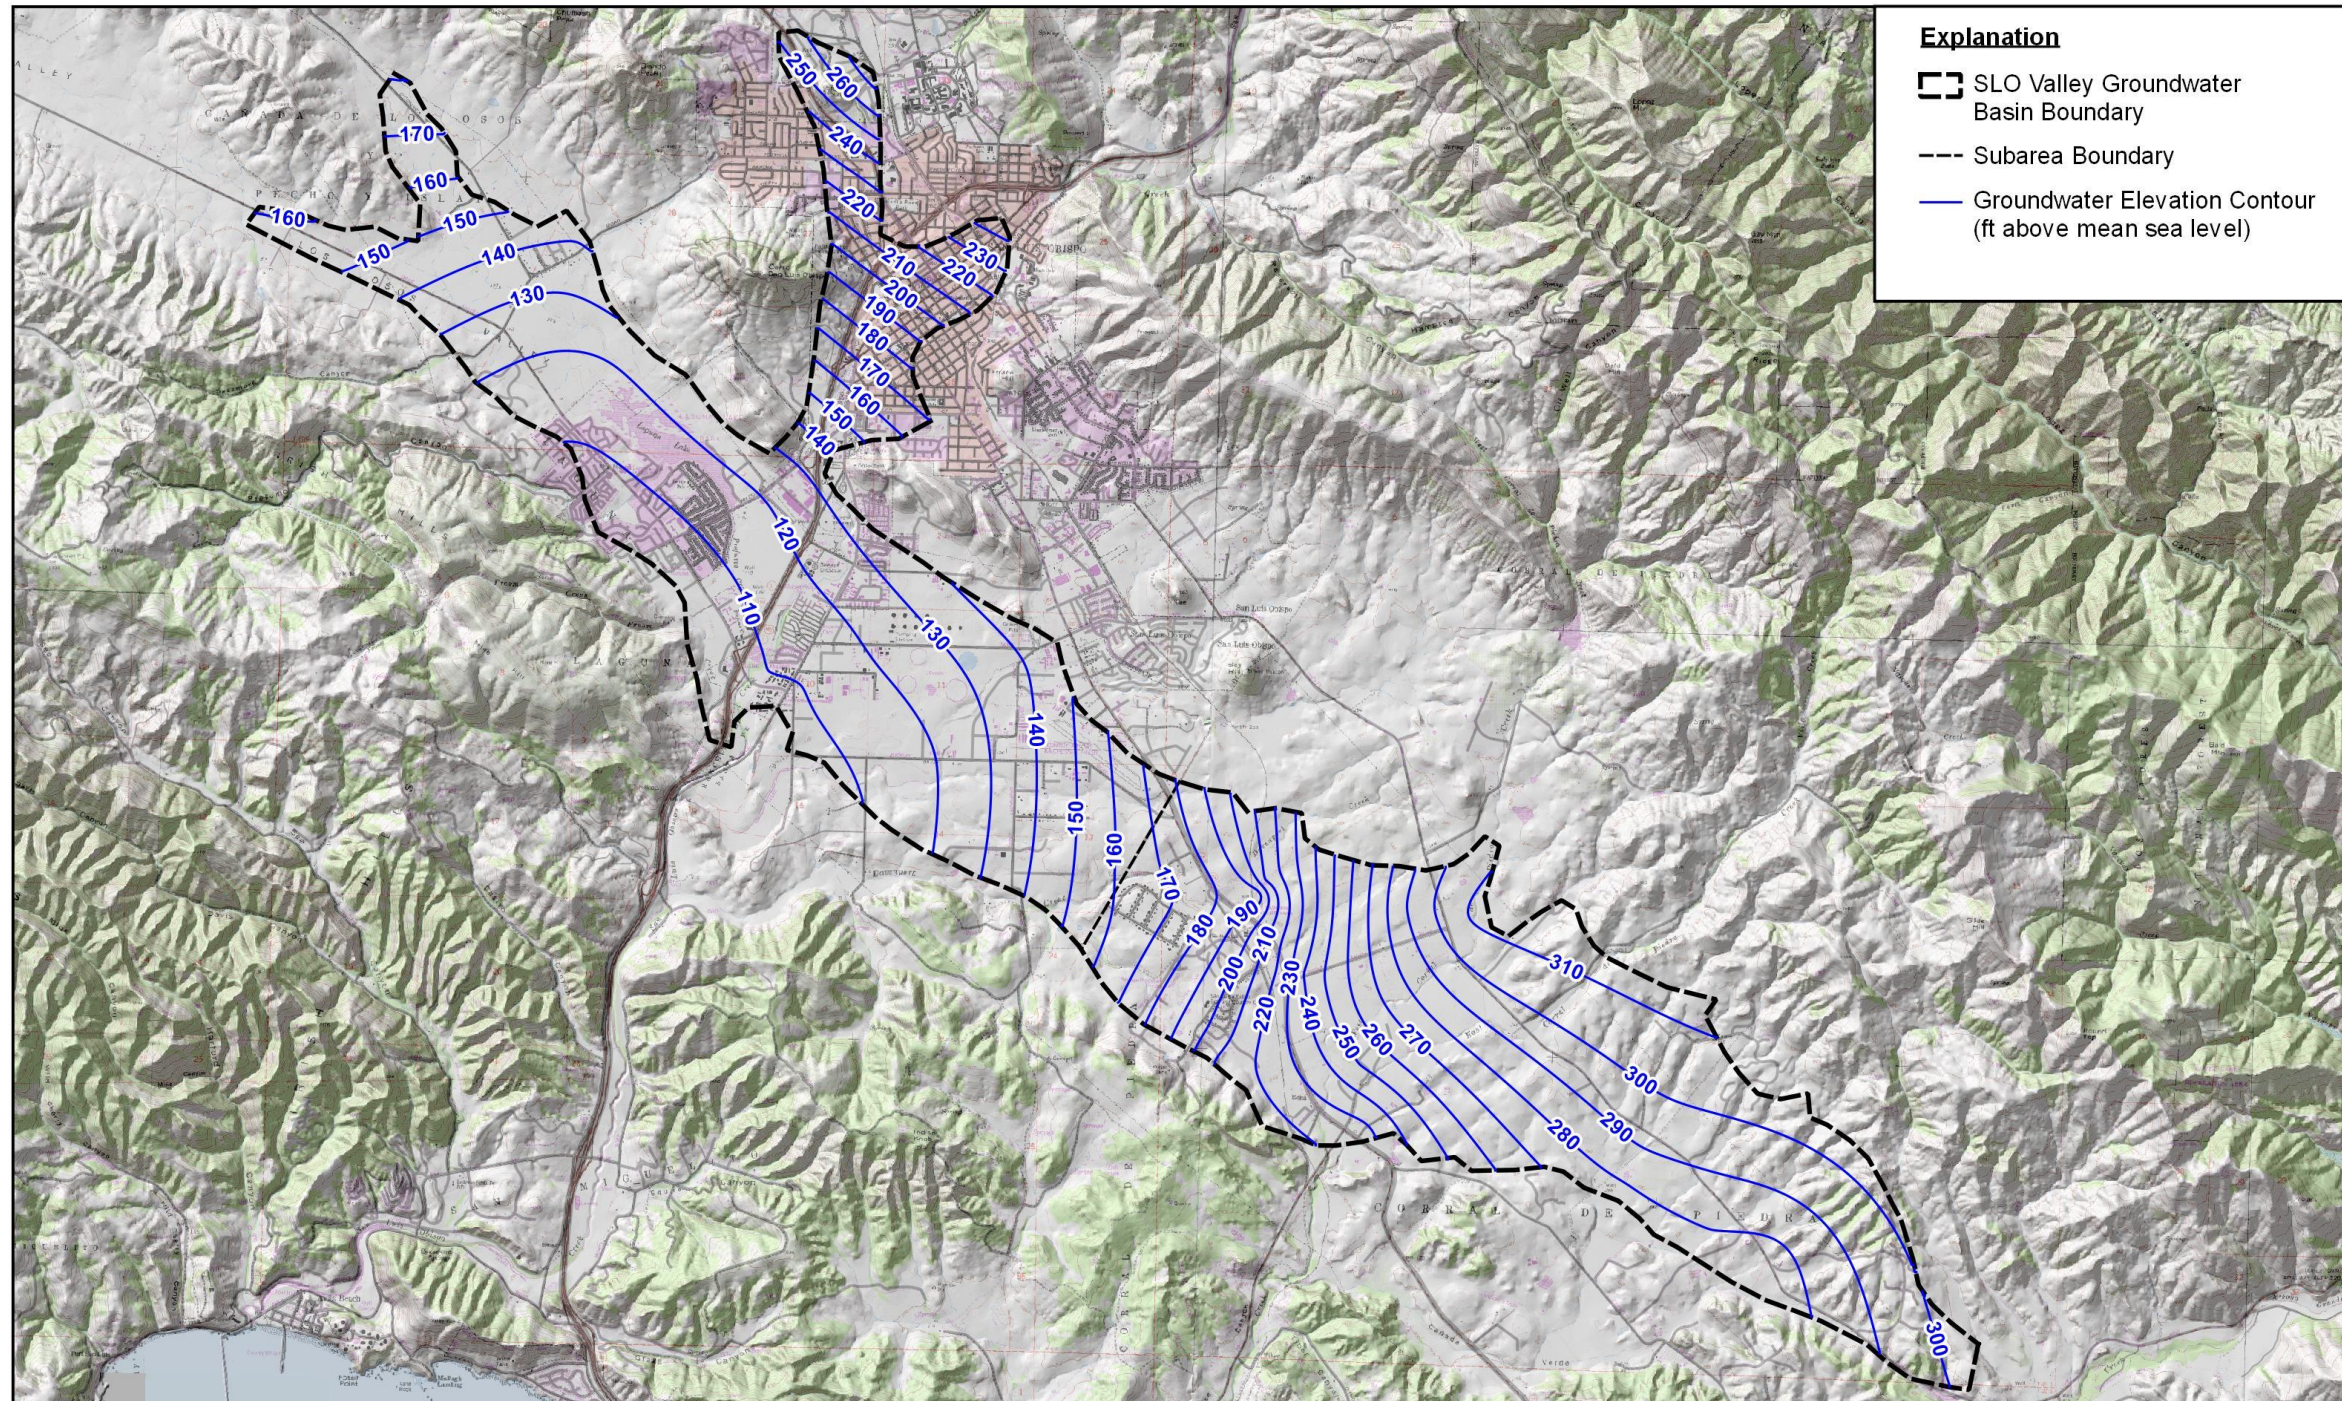

**Explanation**

- SLO Valley Groundwater Basin Boundary
- Subarea Boundary
- Groundwater Elevation Contour (ft above mean sea level)

Prepared For:  
  
 SAN LUIS OBISPO VALLEY BASIN GSP




- References:**
1. Coordinate System: State Plane California V FIPS 0405 Feet
  2. Projection: Lambert Conformal Conic
  3. Horizontal Datum: NAD 83
  4. Vertical Datum: NAVD 88
  5. Basemap: USGS 7.5' Topographic Map

- Notes:**
- 1.
  - 2.
  - 3.


**Groundwater Elevation Contours  
 Spring 1986**

**Figure 6-18**

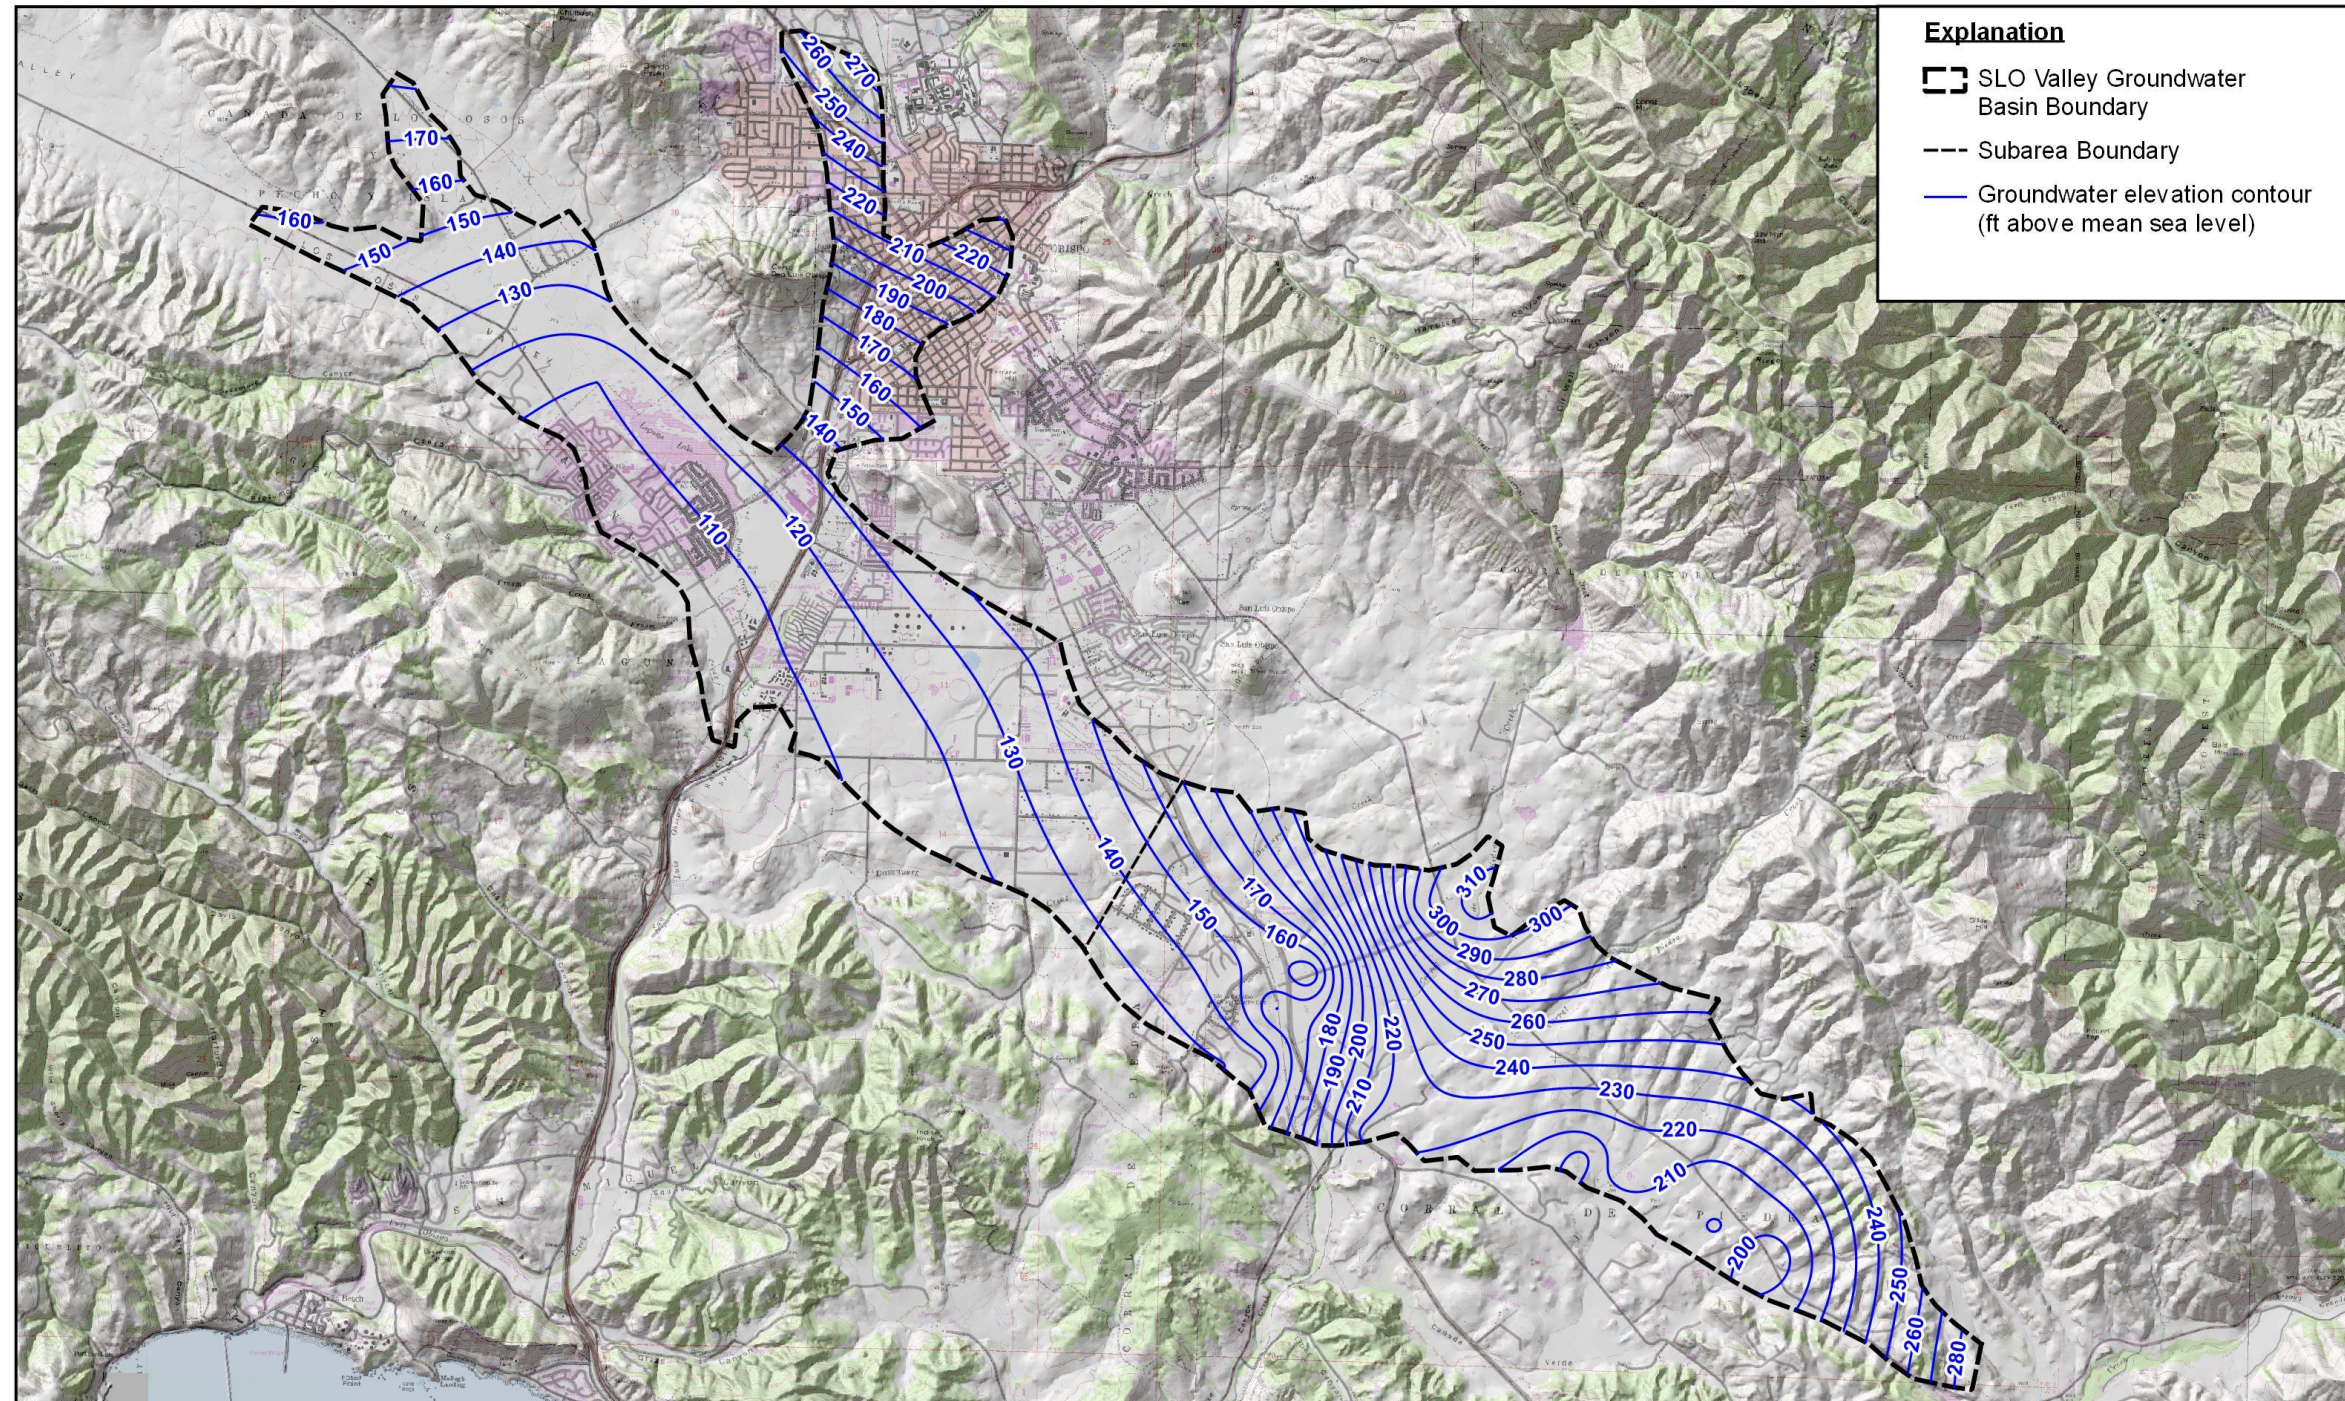

Prepared For:  
  
 SAN LUIS OBISPO VALLEY BASIN GSP

Author: TK  
 Date: 06/18/2020



**References:**

- Coordinate System: State Plane California V FIPS 0405 Feet
- Projection: Lambert Conformal Conic
- Horizontal Datum: NAD 83
- Vertical Datum: NAVD 88
- Basemap: USGS 7.5' Topographic Map

**Notes:**

- 
- 
- 

Groundwater Elevation Contours  
 Spring 2019

Figure 6-19

The water level contour maps and the base of permeable sediments were processed for volume calculation using Surfer, a grid-based mapping and graphic program. The methodology consisted of gridding and trimming surfaces to the Basin subarea boundaries, followed by volume calculation between surfaces. The gross volumes obtained were then multiplied by the representative specific yield for each subarea. An example of the methodology showing gridded surfaces for Spring 2019 water levels and the base of permeable sediments is presented in Figure 6-20. Estimated total storage volumes for selected years using the specific yield method are listed in Table 6-14.

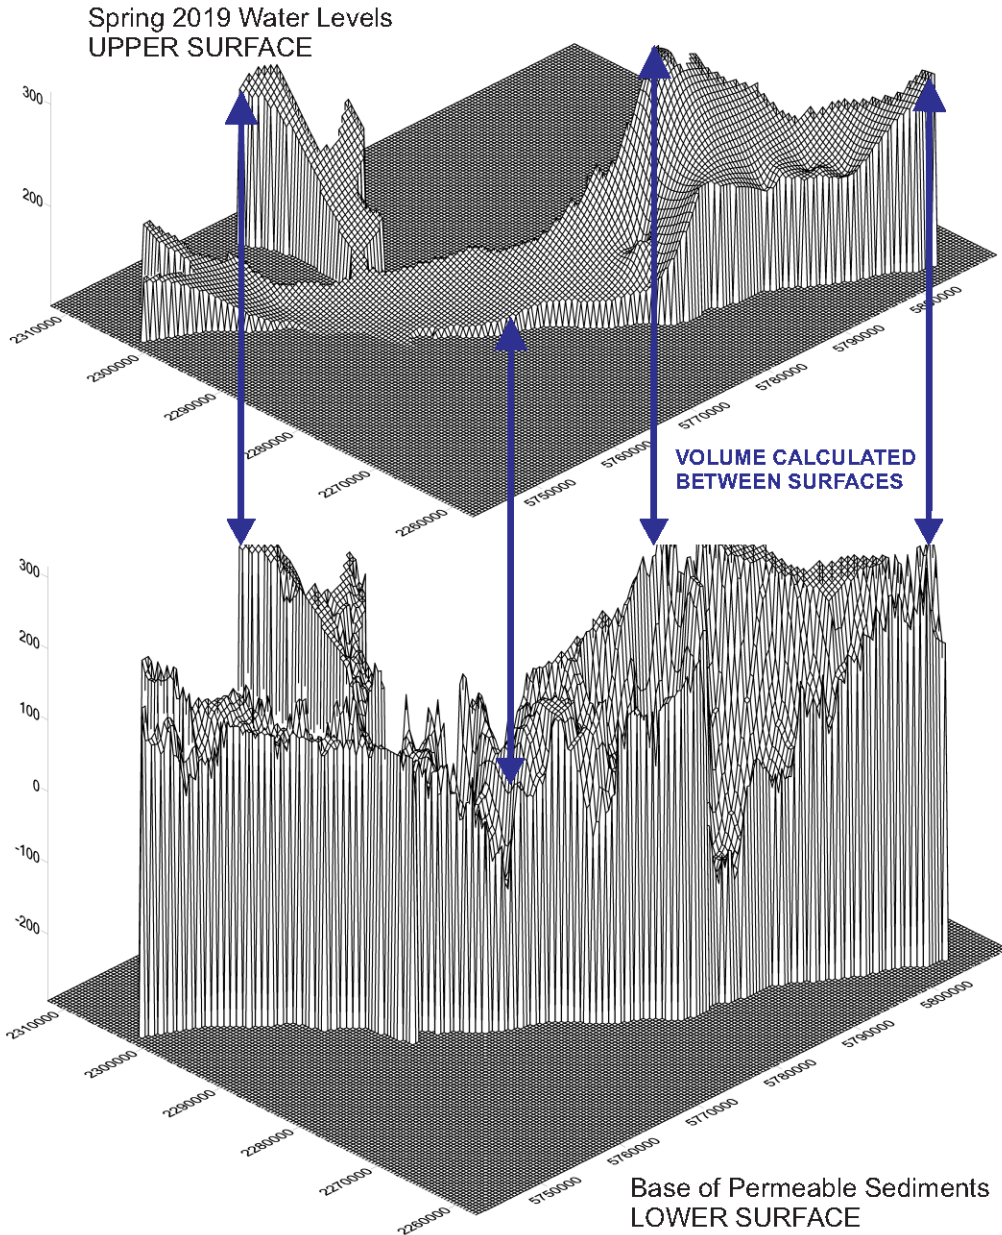


Figure 6-20: Storage Volume Grids.

**Table 6-14: Spring Groundwater Storage Estimates.**

Year	SLO Subarea	Edna Subarea	Basin Total
	Acre-Feet		
1986	36,310	132,840	169,150
1990	31,560	119,950	151,510
1995	36,750	131,020	167,770
1998	36,990	133,010	170,000
2005	38,080	126,210	164,290
2011	35,910	120,220	156,130
2014	34,280	104,950	139,230
2019	34,940	105,630	140,570

The groundwater storage estimates are much greater than previously reported, which was 23,300 acre-feet for the San Luis Valley subarea and 46,000 acre-feet for the Edna Valley subarea (Groundwater Basin Evaluation, Boyle Engineering, 1991). The Draft DWR study estimated an average storage of 16,000 acre-feet for the San Luis Valley subarea and 34,000 acre-feet for the Edna valley subarea (DWR, 1997). The increases are due primarily to improvements in characterizing Basin saturated thicknesses, specific yield, and methodology.

For example, the average saturated thickness of Basin sediments in the Edna Valley is listed as 102.9 feet by Boyle (1991). For Spring 1990, the average thickness of saturated sediments in the Edna Valley subarea using the base of permeable sediments in the SLO Basin Characterization Report (GSI, 2018) and Surfer gridding methodology is estimated to be approximately 150 feet, an increase of 50 percent. The estimated average specific yield value for the Edna Valley subarea is also close to 30 percent greater for GSP storage calculations (11.7 percent) than the prior estimate (9.1 percent). An additional 30-35 percent decrease in Basin storage areas was also incorporated into the prior methodology through the application of a subsurface configuration factor, which was not clearly described. (Boyle, 1991).

Increases in total groundwater in storage between prior work and current estimates does not imply an increase in sustainable yield or basin recharge rate. The purpose of total storage estimates for the water budget is to provide an independent calculation of change in storage over time, which is a critical part of the water budget equation.

**6.3.6 Change in Storage**

Balancing the water budget final step in water budget development. As previously mentioned, the water budget equation is as follows:

$$\text{INFLOW} - \text{OUTFLOW} = \text{CHANGE IN STORAGE}$$

The annual change in storage for the surface water budget is assumed to be zero, as surface flow moves quickly through the basin and any differences in storage are minor compared to the total budget. Therefore, the surface water balance equation can be simplified as  $\text{INFLOW} = \text{OUTFLOW}$ , and was used to estimate the stream outflow component of the surface water budget.

For the groundwater budget, groundwater-surface water interaction (as stream flow seepage) was adjusted to approximate the change in storage calculated using the specific yield method discussed above. The difference between the estimated change in storage shown in the water budget and the measured change in storage using the specific yield method is the mass balance error. Change in storage is reported between seasonal high (Spring) conditions per GSP regulations.

Change in storage and mass balance error for the groundwater budget is shown in Table 6-15. Figure 6-21 shows total storage using the water budget and specific yield method.

**Table 6-15: Change in Storage Comparison – Historical Base Period 1987 – 2019.**

Subarea	Water Budget	Specific Yield Method	Mass Balance Error		
	Change in Storage (acre-feet)		acre-feet	AFY	Percent*
San Luis Valley subarea	690	-1,370	2,060	62	6
Edna Valley Subarea	-27,440	-27,210	-230	-7	0

\*Percent of total subarea water budget

The difference in change in storage estimates between the water budget and the specific yield method is approximately 60 AFY for the San Luis Valley subarea over the historical base. The water budget estimates a 690 acre-foot gain in storage, compared to a 1,370 acre-foot decline in storage using the specific yield method. A review of the contour maps indicates that the decline in San Luis Valley subarea storage shown by the specific yield method is due to the effects of groundwater level declines in the Edna Valley subarea being contoured across the bedrock high into the San Luis Valley subarea (Figure 6-18 and Figure 6-19). There are no hydrographs for water levels in the bedrock high area, and the extent to which water level declines in the Edna Valley subarea have influenced water levels in the eastern portion of the San Luis Valley subarea is uncertain. Available water level hydrographs do not show overall water level declines west of the bedrock high (Figure 5-11; Chapter 5).

The difference in change in storage estimates between the water budget and the specific yield method is less than 10 AFY for the Edna Valley subarea over the historical base period. The water budget estimates a 27,440 acre-foot decline in storage, compared to a 27,210 acre-foot decline in storage using the specific yield method. The change in storage mass balance error for the Basin historical groundwater budget is less than 100 acre-feet per year, which is reasonable for the purposes of preliminary sustainable yield estimates.

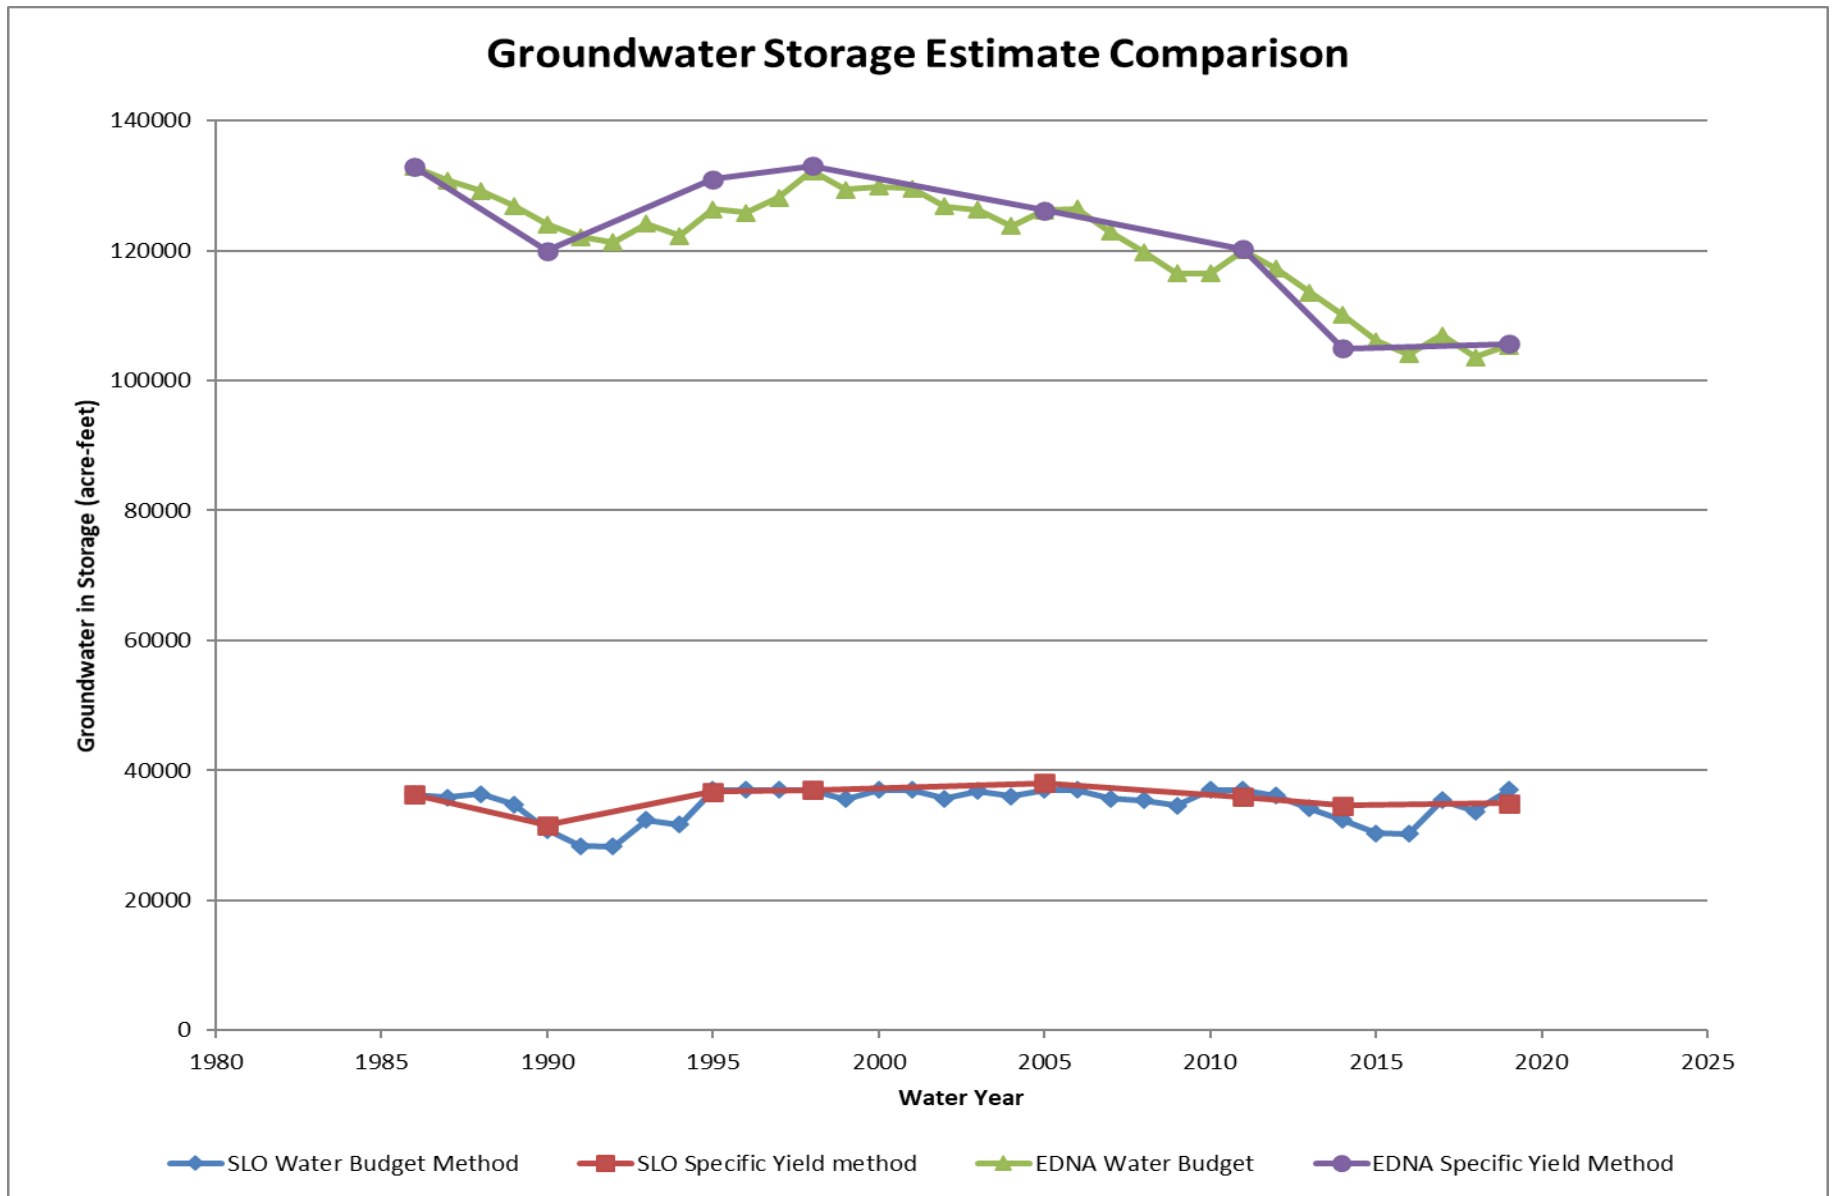


Figure 6-21: Groundwater Storage Estimate Comparison for Basin Subareas.



**6.3.7 Preliminary Sustainable Yield Estimate**

The sustainable yield is the maximum quantity of water, calculated over a base period representative of long-term conditions in the Basin and including any temporary surplus, that can be withdrawn annually from a groundwater supply without causing an undesirable result. Temporary surplus is the amount of water that may be pumped from an aquifer to make room to store future water that would otherwise be wasted and unavailable for use. Undesirable results will be defined for six sustainable management criteria in Chapter 7. Examples of potential undesirable results are related to long-term declines in water levels and associated loss in groundwater in storage.

Estimating sustainable yield includes evaluating historical, current, and projected water budget conditions. The analytical water budget method utilized in this analysis evaluates historical and current conditions, and provides a preliminary estimate for the Basin sustainable yield. The projected water budget will be evaluated using the Basin numerical model presented later in the projected water budget section of the chapter, at which time the minimum thresholds for the sustainable management criteria can be incorporated and the final sustainable yield will be determined. The preliminary sustainability estimate can be used for planning potential projects and management action scenarios for the Basin numerical model.

The preliminary sustainable yield of the San Luis Obispo groundwater Basin has been estimated separately for each of the subareas. The Edna Valley subarea has experienced cumulative storage declines since 1998, while the San Luis Valley subarea experiences storage declines during drought, but recovers and is typically close to full storage capacity (Figure 6-21).

For the Edna Valley subarea, sustainable yield is estimated as the amount of long-term recharge (groundwater inflow) to the Basin over the historical base period (3,400 AFY) minus subsurface outflow (100 AFY). The resulting preliminary sustainable yield is estimated at a 3,300 AFY.

The San Luis Valley subarea has not experienced cumulative and persistent storage declines. Long-term average recharge to groundwater in the San Luis Valley subarea is estimated to be 3,700 AFY, of which an estimated 1,200 AFY is used by wetlands, leaving 2,500 AFY for withdrawal without long-term declines in storage (subsurface outflow is supported by wastewater discharges). The historical recharge to the subarea may be less than the sustainable yield, however, because average annual recharge can increase with storage declines, particularly in a Basin that is at or near storage capacity.

The San Luis Valley subarea did experience significant undesirable results due to land subsidence during the period of high groundwater use and associated storage decline toward the end of the 1987-91 drought. Average groundwater production from 1990-1992 was 3,960 AFY. Land subsidence is not necessarily a risk over the entire subarea, and would generally require historical storage declines to be exceeded in affected areas for additional subsidence to occur. However, without mitigation for land subsidence or specific projects that increase recharge during dry periods, the preliminary sustainable yield of the San Luis Valley subarea is estimated at 2,500 AFY, based on the long-term average recharge of 3,700 AFY minus 1,200 AFY used by wetlands. Table 6-15 summarizes the preliminary sustainable yield estimates.

**Table 6-16: Preliminary Sustainable Yield Estimate (AFY).**

San Luis Valley Subarea	2,500
Edna Valley Subarea	3,300
Basin Total	5,800

The above values are lower overall than historical estimates by Boyle (1991) and DWR (1997 Draft). Boyle estimated 5,900 AFY of sustainable yield for the Basin while DWR estimated 2,000-2,500 for the San Luis Valley subarea and 4,000-4,500 for the Edna Valley Subarea.

**6.3.8 Quantification of Overdraft**

Overdraft is the condition of a groundwater Basin or subbasin where the amount of water withdrawn by pumping exceeds the amount of water that recharges a Basin over a period of years, during which the water supply conditions approximate average conditions.

While the 33-year historical base period is representative of the long-term climatic conditions needed for estimating sustainable yield, a shorter period is appropriate for characterizing water supply conditions with respect to Basin withdrawals and overdraft. Over the last 10 years the City has introduced recycled water reuse at Laguna golf course (historically irrigated by groundwater) and has stopped pumping groundwater from the San Luis Valley subarea, while total irrigated agriculture in the Edna Valley subarea has leveled off, after increasing from the beginning of the historical base period through the mid-2000’s (Table 6-5). Overdraft for GSP planning purposes has been estimated as the difference between sustainable yield and average groundwater withdrawals over the last 10 years (2010-2019), with an adjustment in the San Luis Valley subarea to account for reductions in agricultural acreage due to recent development.

Groundwater extractions in the San Luis Valley subarea (adjusted for recent development) have averaged 1,800 AFY since 2010, which is 700 AFY less than the average recharge of 2,500 AFY over the same representative period, indicating a surplus of groundwater for the subarea. In the Edna Valley subarea, groundwater pumping has averaged 4,400 AFY since 2010, which is 1,100 AFY more than the sustainable yield of 3,300 AFY for the subarea. The Edna Valley subarea is an estimated 1,100 AFY in overdraft. Total Basin overdraft is estimated at 400 AFY. Table 6-16 summarizes the overdraft estimates.

**Table 6-17: Estimated Overdraft (AFY).**

San Luis Valley Subarea	-700*
Edna Valley Subarea	1,100
Basin Total	400

\*surplus

In comparison, prior work by Boyle (1991) concluded that there was short-term overdraft in the Basin and that withdrawals in excess of sustainable yield was a common occurrence. However, during the period from 1978-1990, the Basin was not considered in a state of sustained overdraft. The Draft 1997 DWR study does not address overdraft, although there is a net deficit in the basin water budget for the 1969-1977 base period, a surplus for the 1983 water budget, and a deficit for the 1990 water budget. The draft DWR report concluded that additional water beyond the long-term dependable yield could be extracted from the Basin, but that there could be adverse impacts.

**6.4 CURRENT WATER BUDGET**

The current water budget quantifies inflows and outflows for the Basin based on the last four years of the historical water budget, from 2016 to 2019. These years provide the most recent population, land use, and hydrologic conditions. Recent Basin conditions have been characterized by above average rainfall, along with a decrease in urban extractions and imported surface water supplies assumed to be associated with greater conservation awareness by the public during the 2012-2016 drought. There have also been declines in agricultural acreage and associated groundwater extractions in the San Luis Valley subarea associated with urban development.

Comparisons of the current water budget to the 1987-2019 historical surface water budget used for the preliminary sustainable yield estimates for the two subareas and total Basin are shown in Table 6-17 through Table 6-19. Bar graphs are shown in Figure 6-22 through Figure 6-27. As expected, the average annual water budget inflows and outflows are greater under current conditions than the historical base period, primarily due to greater rainfall. There has been more groundwater inflow than outflow under the current water budget in the San Luis Valley subarea, leading to increased groundwater in storage. In the Edna valley subarea, the outflow has been slightly greater than inflow under the current water budget, with relatively little change to groundwater in storage since the end of the recent drought (Figure 6-21). As noted above, groundwater extractions for agriculture in the San Luis Valley subarea have declined between the historical and current water budgets.

**Table 6-18: Current Water Budget - San Luis Valley Subarea.**

<b>SAN LUIS VALLEY SUBAREA</b>		
<b>SURFACE WATER BUDGET</b>	<b>Historical Average (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Precipitation	10,580	12,280
Groundwater extractions (Urban)	740	400
Groundwater extractions (Ag)	1,630	1,370
Stream Inflow at Basin Boundaries	10,720	10,570
Wastewater discharge to streams	4,080	3,910
Local Imported Supplies	5,820	5,430
<b>TOTAL IN</b>	<b>33,580</b>	<b>33,960</b>
<b>Outflow</b>		
ET of precipitation	7,770	8,220
ET of Applied Water (Urban)	2,050	1,510
ET of Applied Water (Ag)	1,310	1,100
ET of Lake/Wetland/Riparian	650	690
Surface Water Delivery Offset	4,080	3,910
Infiltration of Precipitation	1,610	3,190
Infiltration of Applied Water (Urban)	440	440
Infiltration of Applied Water (ag)	320	260
GW-SW interaction (net)	970	510
Stream outflow at Basin boundary	14,390	14,120
<b>TOTAL OUT</b>	<b>33,580</b>	<b>33,960</b>
<b>GROUNDWATER BUDGET</b>	<b>Historical Average (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Infiltration of precipitation	1,610	3,190
Urban water return flow	440	440
Agricultural return flow	320	260
GW-SW interaction (net)	970	510
Subsurface from bedrock	340	340
<b>TOTAL IN</b>	<b>3,670</b>	<b>4,750</b>
<b>Outflow</b>		
Groundwater extractions (Urban)	740	400
Groundwater extractions (Ag)	1,630	1,370
Wetland direct ET	1,160	1,190
Subsurface outflow	120	120
<b>TOTAL OUT</b>	<b>3,650</b>	<b>3,080</b>

**Table 6-19: Current Water Budget - Edna Valley Subarea.**

<b>EDNA VALLEY SUBAREA</b>		
<b>SURFACE WATER BUDGET</b>	<b>Historical (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Precipitation	9,300	10,780
Groundwater extractions (Urban)	880	820
Groundwater extractions (Ag)	3,210	3,440
Stream Inflow at Basin Boundaries	3,630	3,480
<b>TOTAL IN</b>	<b>17,020</b>	<b>18,520</b>
<b>Outflow</b>		
ET of precipitation	6,910	7,200
ET of Applied Water (Urban)	600	610
ET of Applied Water (Ag)	2,650	2,870
ET of Riparian	40	40
Infiltration of Precipitation	1,890	2,800
Infiltration of Applied Water (Urban)	280	210
Infiltration of Applied Water (ag)	560	570
GW-SW interaction (net)	510	490
Stream outflow at Basin boundary	3,580	3,750
<b>TOTAL OUT</b>	<b>17,020</b>	<b>18,520</b>
<b>GROUNDWATER BUDGET</b>	<b>Historical Average (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Infiltration of precipitation	1,890	2,800
Urban water return flow	290	220
Agricultural return flow	560	570
GW-SW interaction (net)	510	490
Subsurface from bedrock	110	110
<b>TOTAL IN</b>	<b>3,360</b>	<b>4,180</b>
<b>Outflow</b>		
Groundwater extractions (Urban)	880	820
Groundwater extractions (Ag)	3,210	3,440
Subsurface outflow	100	100
<b>TOTAL OUT</b>	<b>4,190</b>	<b>4,360</b>

**Table 6-20: Current Water Budget - Basin Total.**

<b>BASIN TOTAL</b>		
<b>SURFACE WATER BUDGET</b>	<b>Historical Average (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Precipitation	19,880	23,060
Groundwater extractions (Urban)	1,620	1,220
Groundwater extractions (Ag)	4,840	4,810
Stream Inflow at Basin Boundaries	14,350	14,050
Wastewater discharge to streams	4,080	3,910
Local Imported Supplies	5,820	5,430
<b>TOTAL IN</b>	<b>50,600</b>	<b>52,480</b>
<b>Outflow</b>		
ET of precipitation	14,680	15,420
ET of Applied Water (Urban)	2,650	2,120
ET of Applied Water (Ag)	3,960	3,970
ET of Lake/Wetland/Riparian	690	730
Surface Water Delivery Offset	4,080	3,910
Infiltration of Precipitation	3,500	5,990
Infiltration of Applied Water (Urban)	720	650
Infiltration of Applied Water (ag)	880	830
GW-SW interaction (net)	1,480	1,000
Stream outflow at Basin boundary	17,970	17,870
<b>TOTAL OUT</b>	<b>50,600</b>	<b>52,480</b>
<b>GROUNDWATER BUDGET</b>	<b>Historical Average (1987-2019)</b>	<b>Current (2016-2019)</b>
<b>Inflow</b>	<b>AFY</b>	
Infiltration of precipitation	3,500	5,990
Urban water return flow	730	660
Agricultural return flow	880	830
GW-SW interaction (net)	1,480	1,000
Subsurface from bedrock	450	450
<b>TOTAL IN</b>	<b>7,030</b>	<b>8,930</b>
<b>Outflow</b>		
Groundwater extractions (Urban)	1,620	1,220
Groundwater extractions (Ag)	4,840	4,810
Wetland direct ET	1,160	1,190
Subsurface outflow	220	220
<b>TOTAL OUT</b>	<b>7,840</b>	<b>7,440</b>

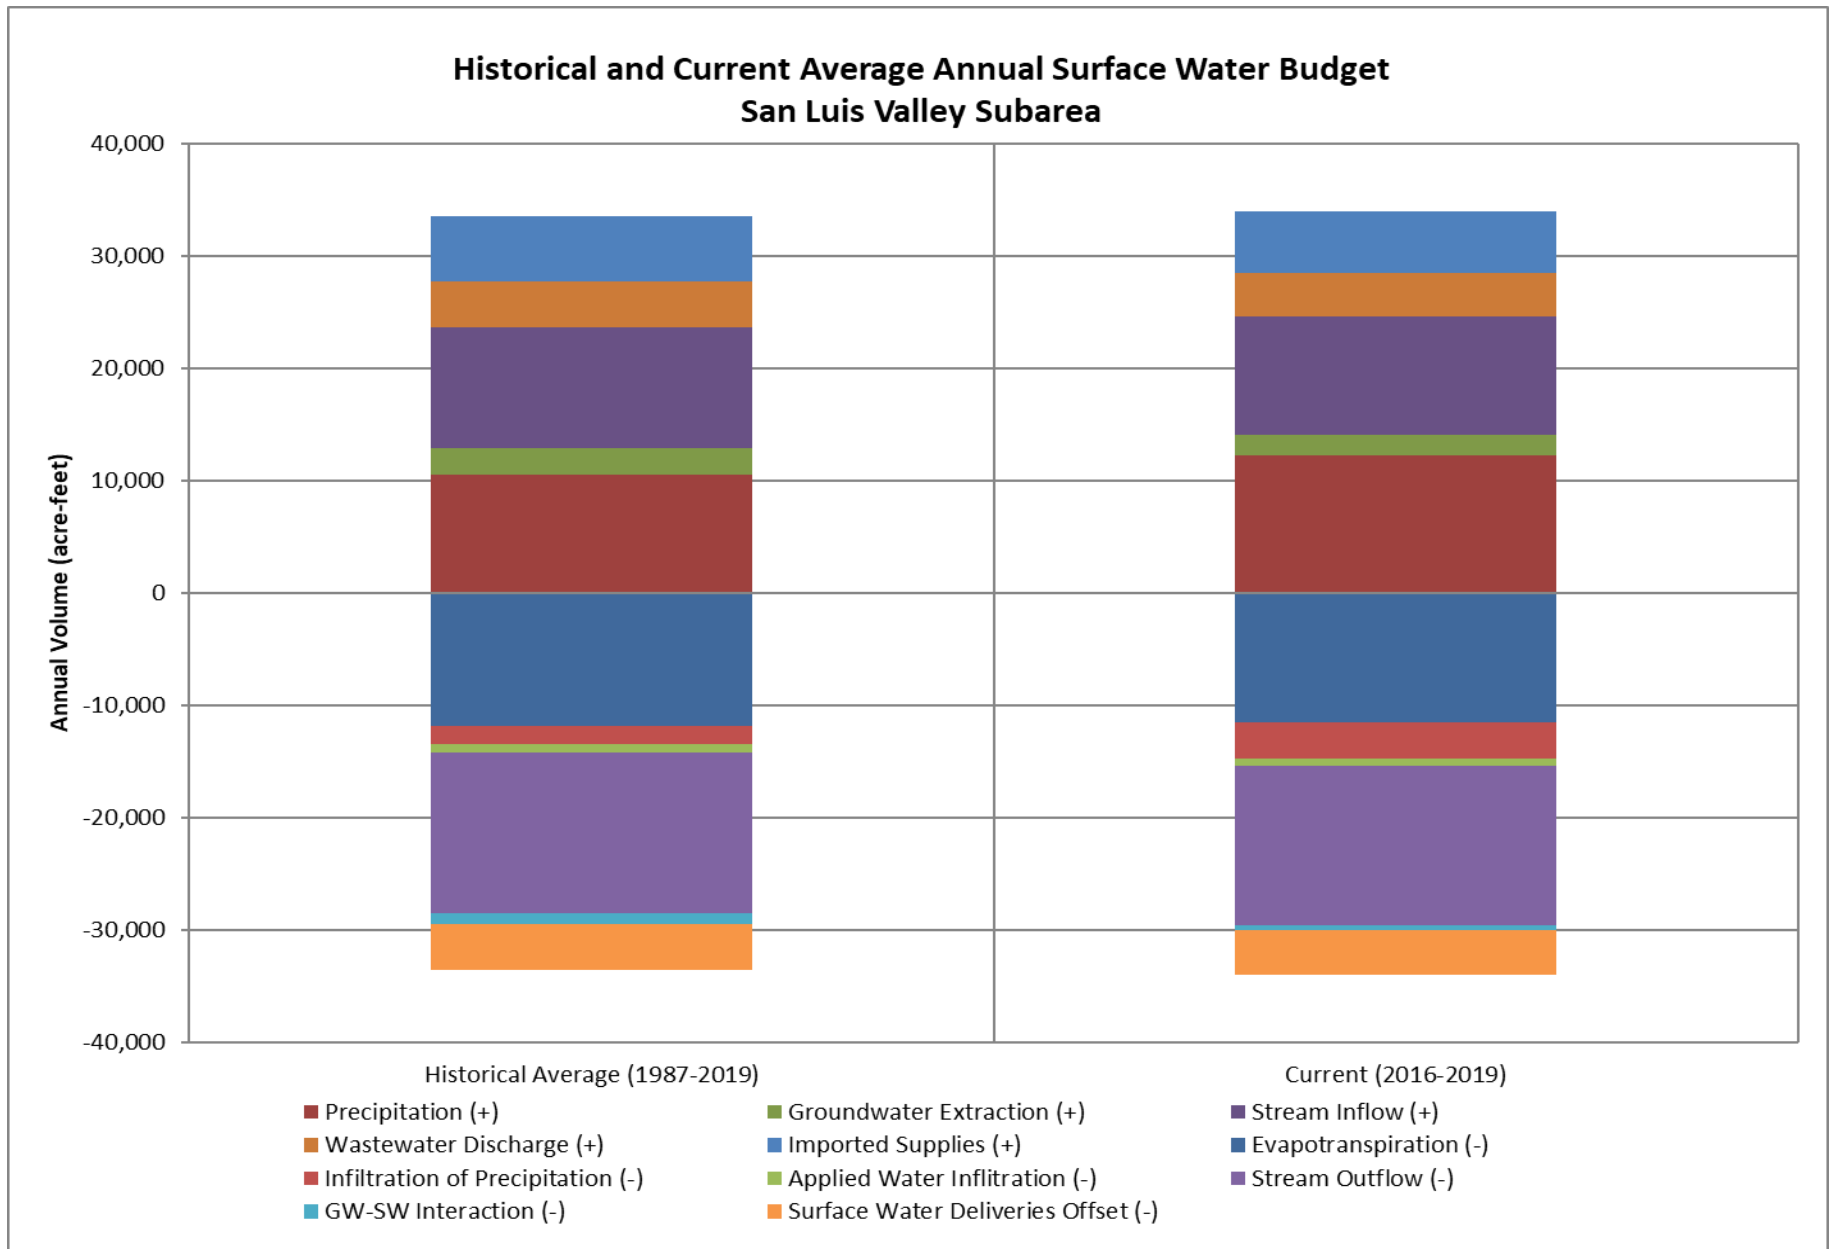


Figure 6-22: Historical and Current Average Annual Surface Water Budget – San Luis Valley Subarea.

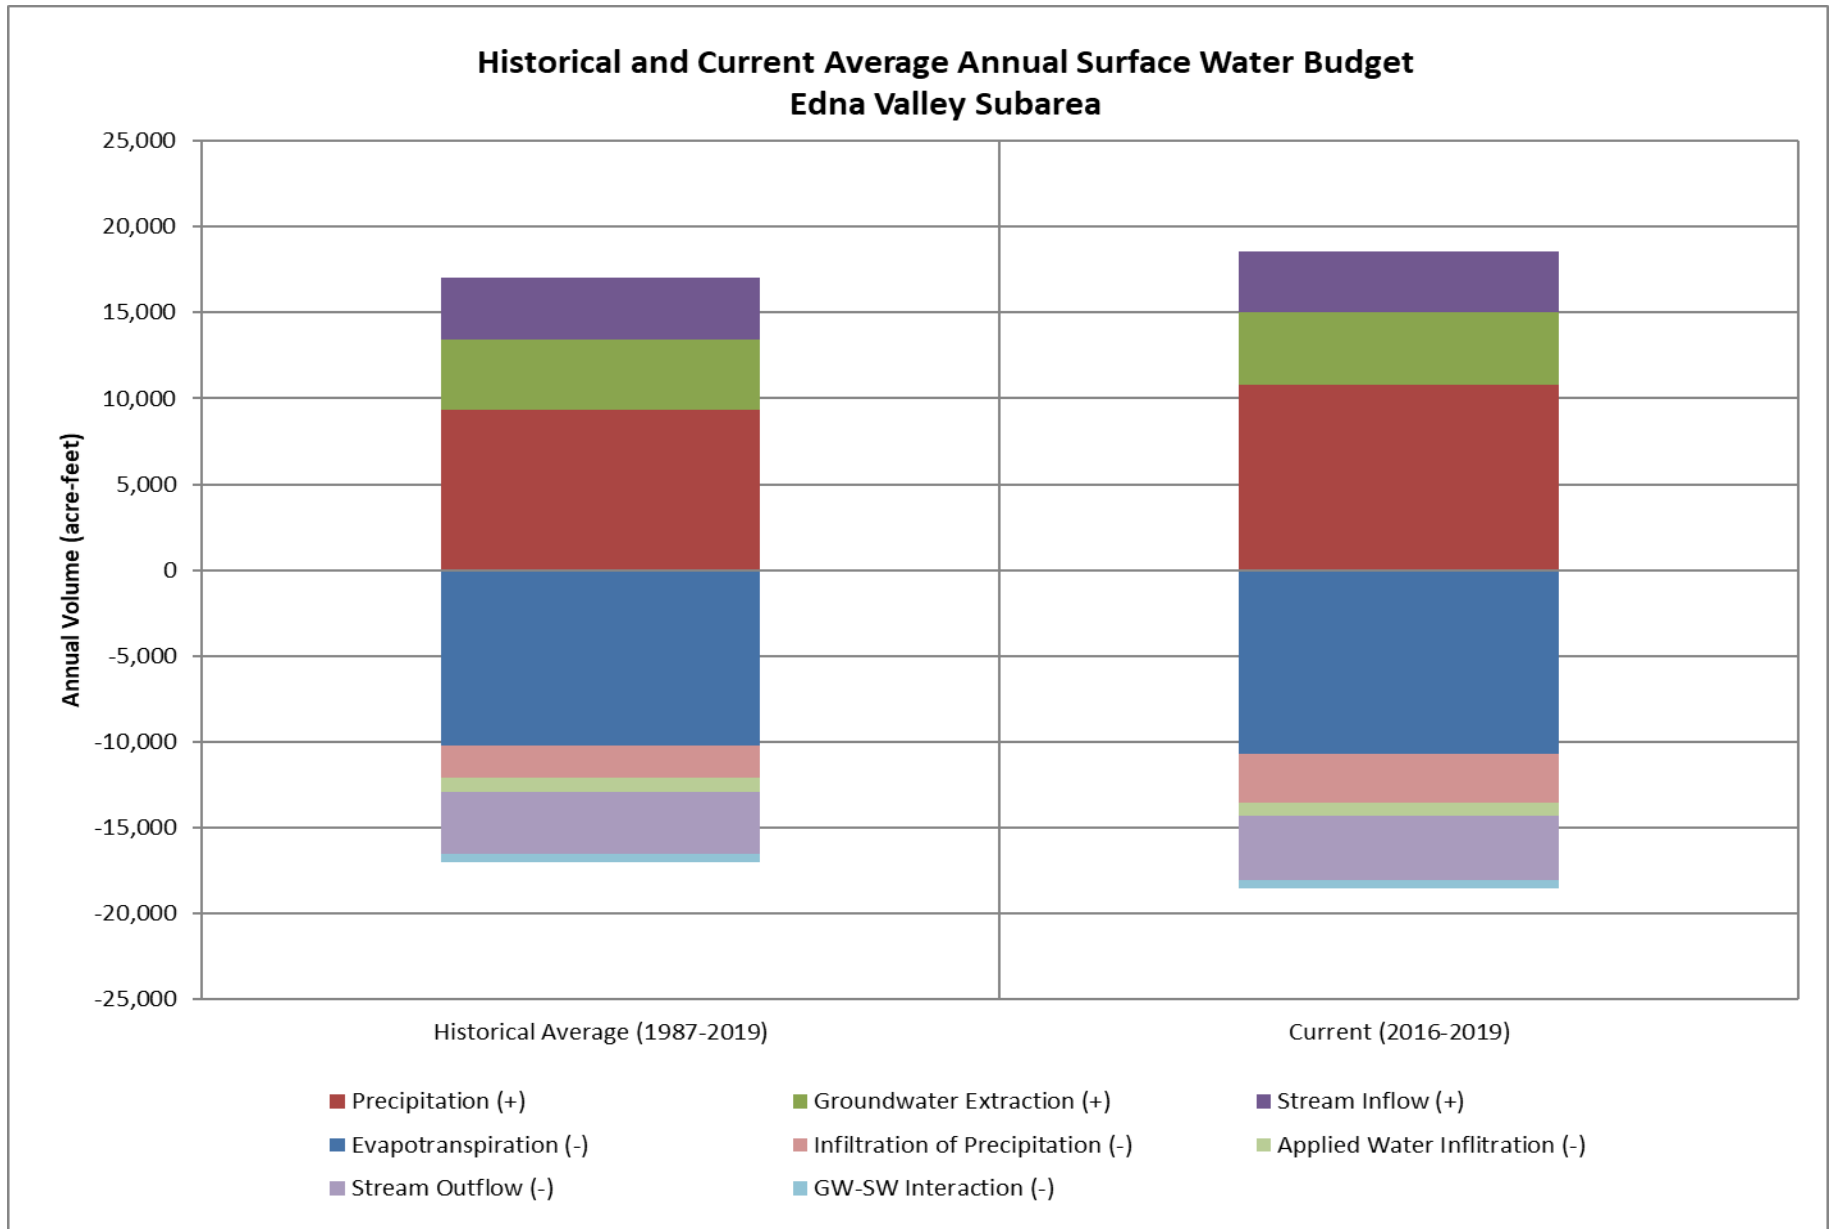


Figure 6-23: Historical and Current Average Annual Surface Water Budget – Edna Valley Subarea.



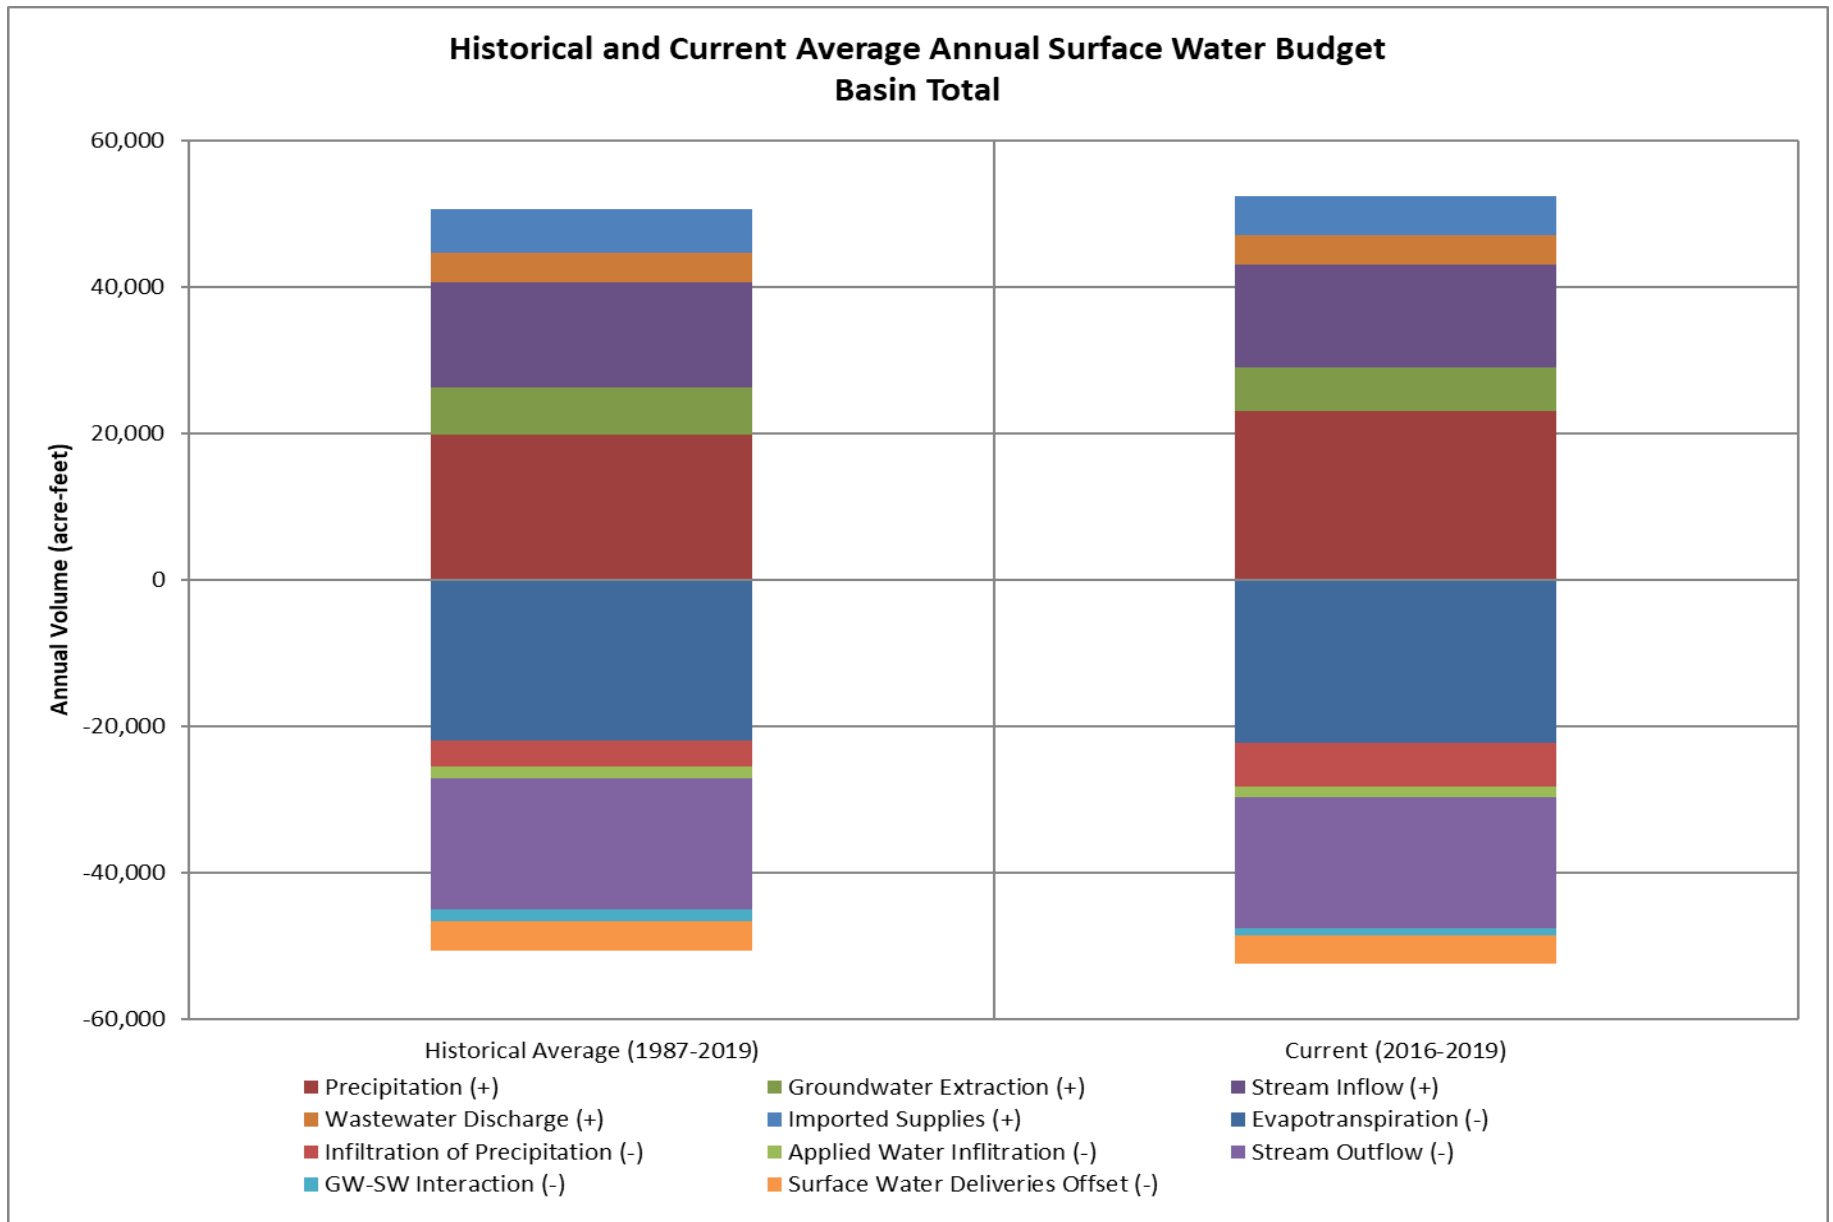


Figure 6-24: Historical and Current Average Annual Surface Water Budget – Basin Total.

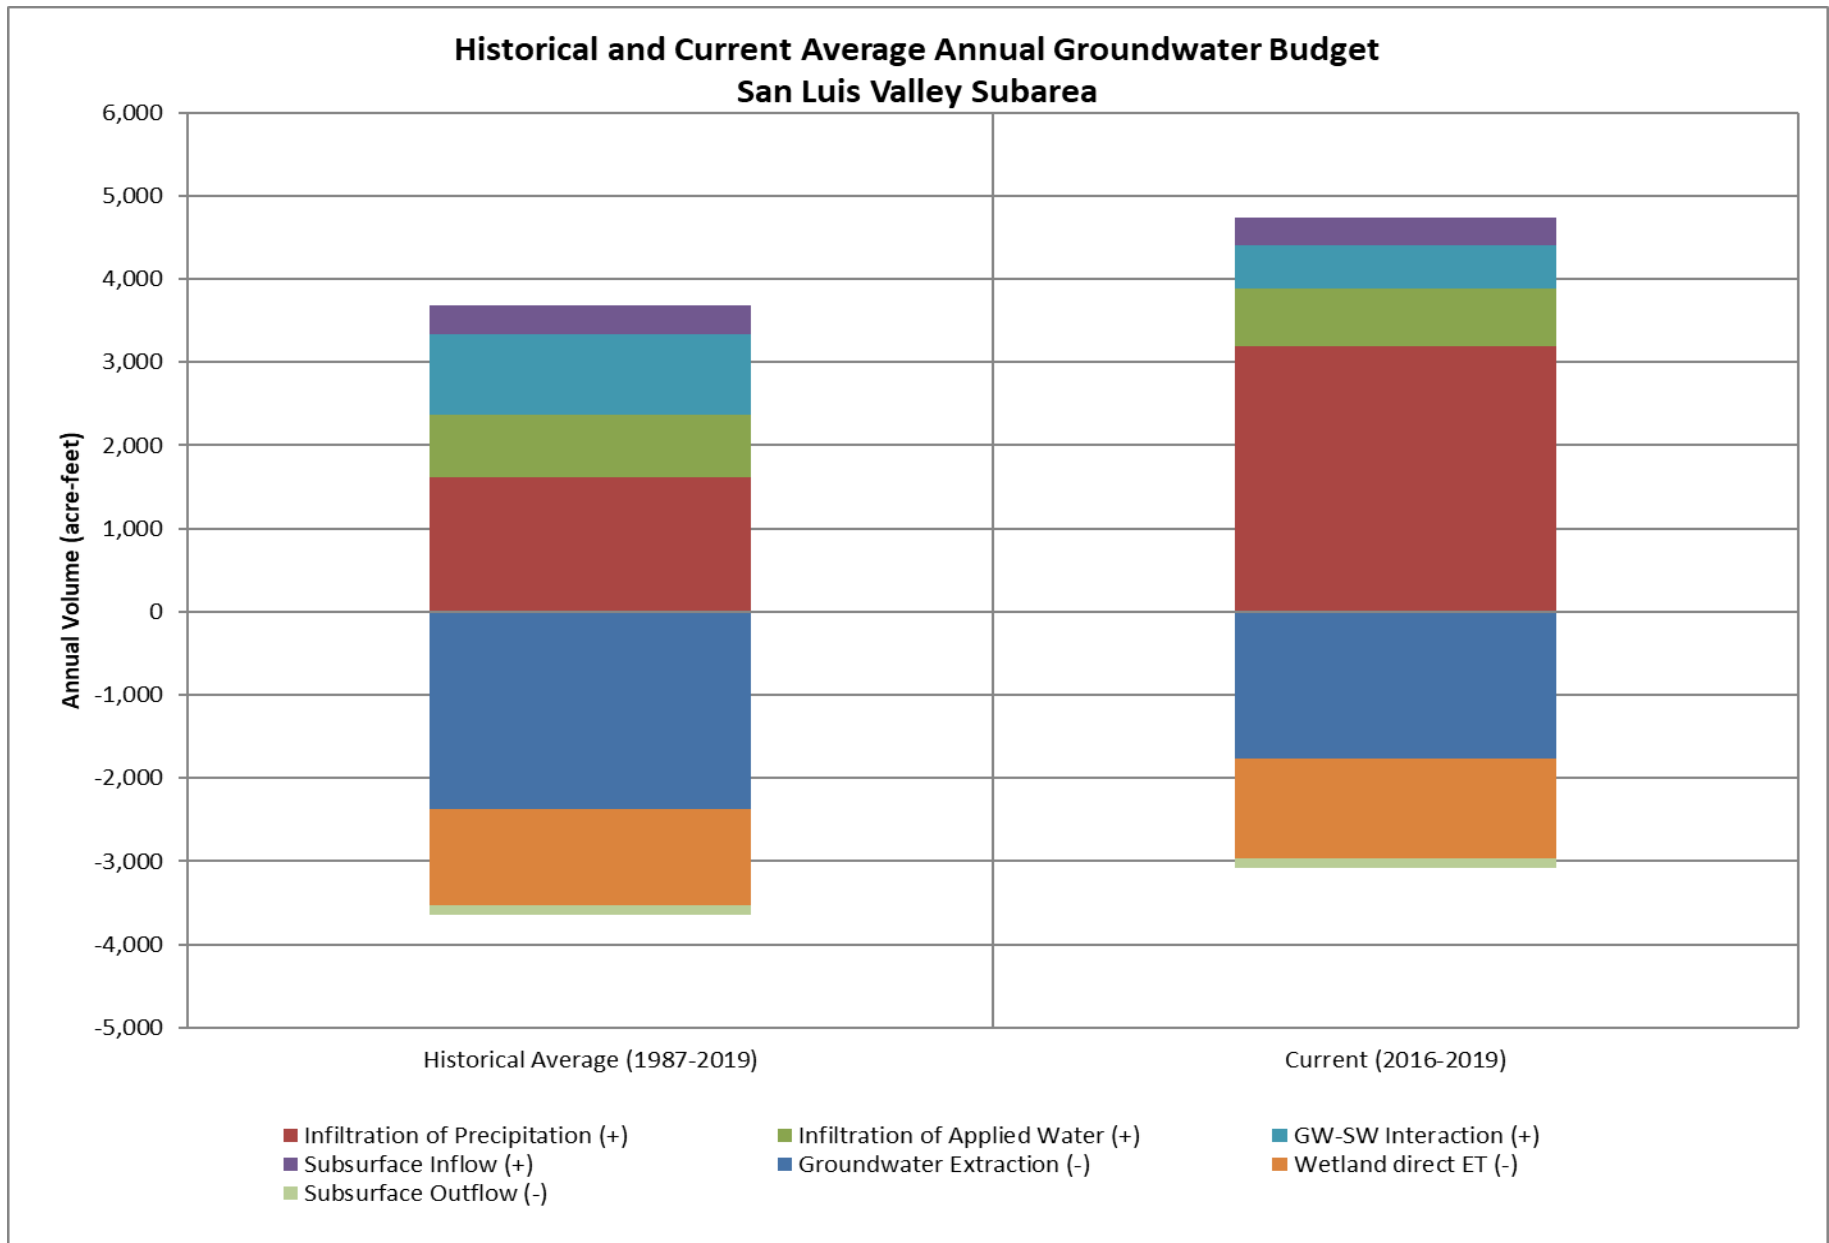


Figure 6-25: Historical and Current Average Annual Groundwater Budget – San Luis Valley Subarea.

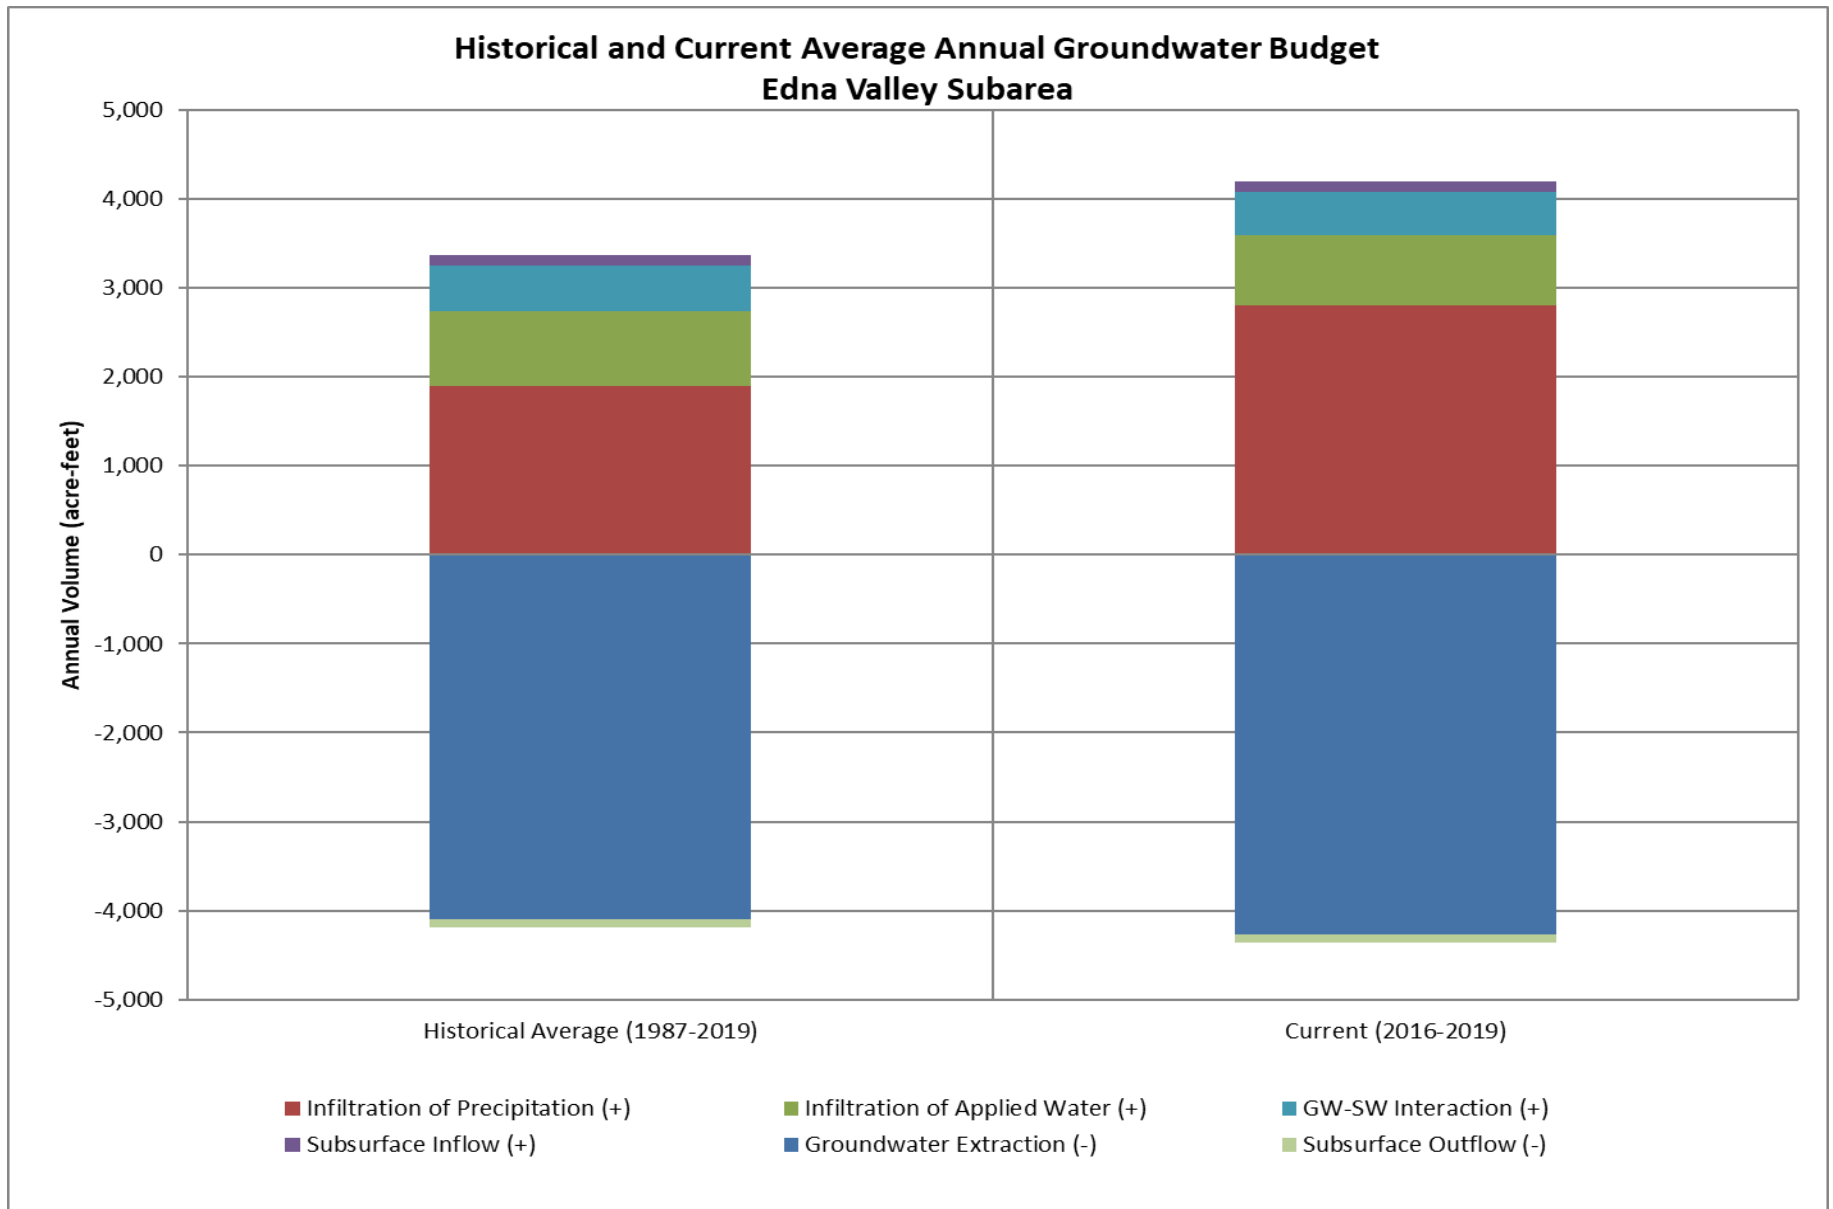


Figure 6-26: Historical and Current Average Annual Groundwater Budget – Edna Valley Subarea.

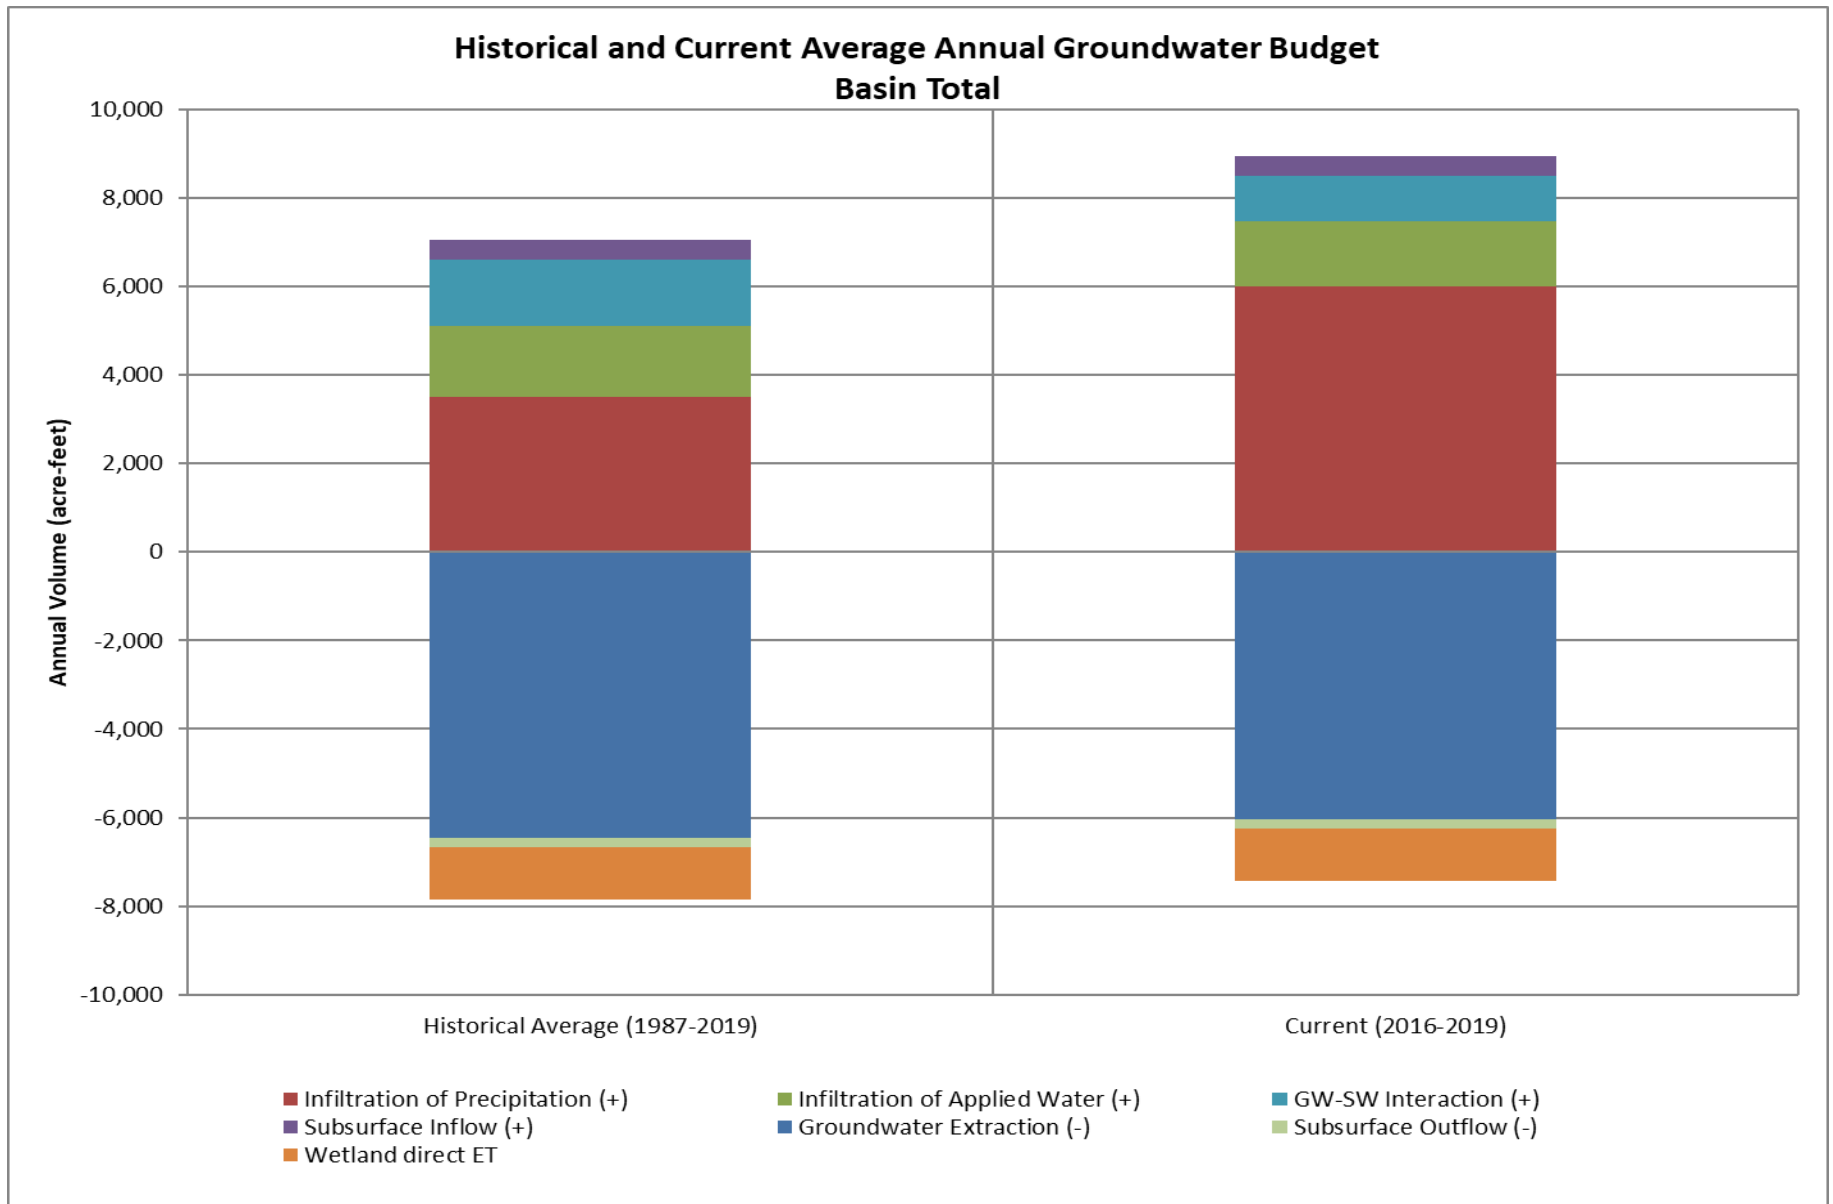


Figure 6-27: Historical and Current Average Annual Groundwater Budget – Basin Total.

## **6.5 PROJECTED WATER BUDGET**

### **6.5.1 Assumptions**

### **6.5.2 Inflows**

### **6.5.3 Outflows**

### **6.5.4 Change In Storage**

## REFERENCES

- Balance Hydrologics. 2008.** *Hydrology and Geology Assessment of the Pismo Creek Watershed, San Luis Obispo County, California.* 2008.
- Blaney. 1963.** *Utilization of the Water of the Santa Ynez River Basin in Southern Santa Barbara County California, United States Department of Agriculture.* 1963.
- . **1933.** *Ventura County Investigation, Bulletin No. 46, California Department of Public Works, Division of Water Resources.* 1933.
- Boyle Engineering. 1991.** *City of San Luis Obispo Groundwater Basin Evaluation.* January. 1991.
- Carollo. 2012.** *San Luis Obispo County Master Water Report.* 2012.
- CIMS. 2019.** *Station 52, San Luis Obispo - Central Coast Valleys.* 2019.
- City of San Luis Obispo. 2016.** *2015 Urban Water Management Plan.* 2016.
- . **2018.** *General Plan.* 2018.
- . **2015.** *Water Resources Status Report.* 2015.
- . **2000.** *Water Use Factors.* 2000.
- Cleath & Associates, Inc. 2001.** *Well Construction and Testing Report for Lewis Lane #4, Edna Valley, San Luis Obispo County. Prepared for Southern California Water Company.* July. 2001.
- . **2003.** *Well Construction and Testing Report for Water Supply and Irrigation Wells, City of San Luis Obispo, Hayashi Irrigation Wells and Highway 101 Water Supply Well.* March. 2003.
- Cleath-Harris Geologists. 2018.** *Groundwater Flow Analysis, Recycled Water Recharge Project, San Luis Valley Subarea, San Luis Obispo Valley Groundwater Basin.* 2018.
- . **2019.** *Optional Task 2.4B Geophysical Survey.* 2019.
- Cleath-Harris Geologists, Inc. 2010.** *Edna Valley Water System Groundwater Study. Prepared for Golden State Water Company.* May. 2010.
- . **2013.** *Summary of Drilling, Testing, and Destruction of the Golden State Water Company Country Club Test Well, Edna Road System, 6110 Lewis Lane, San Luis Obispo, California. Prepared for Golden State Water Company.* June. 2013.
- . **2013.** *Summary of Exploration and Testing, 5061 Hacienda Avenue, San Luis Obispo, California. Prepared for Golden State Water Company.* February. 2013.
- . **2014.** *Summary of Exploration and Testing, Blodgett parcel, Whiskey Run Lane, Country Club Area, San Luis Obispo, California. Prepared for Golden State Water Company.* July. 2014.
- County of San Luis Obispo. 2014.** *San Luis Obispo County Integrated Regional Water Management Plan (IRWMP).* 2014.
- Cuesta Engineering Corporation. 2007.** *San Luis Obispo Creek Watershed Calibration Study.* 2007.
- Dibble, T.W. 2004.** *Geologic Map of the Lopez Mountain Quadrangle, San Luis Obispo County, California.* s.l. : Dibble Geology Center Map, 2004. #DF-130.
- Dibble, T.W. 2006.** *Geologic Map of the Arroyo Grande NE Quadrangle, San Luis Obispo County, California.* s.l. : Dibble Geology Center Map, 2006. #DF-211.
- . **2006.** *Geologic Map of the Pismo Beach Quadrangle, San Luis Obispo County, California.* s.l. : Dibble Geology Center Map, 2006. #DF-212.
- . **2004.** *Geologic Map of the San Luis Obispo Quadrangle, San Luis Obispo County, California.* . s.l. : Dibble Geology Center Map, 2004. #DF-129.
- DWR. 2003.** *California's Groundwater: Bulletin 118 – Update 2003, Groundwater Basin Descriptions.* 2003.
- . **2016.** *California's Groundwater: Bulletin 118 - Interim Update 2016, Working Towards Sustainability.* 2016.
- . **2003.** *California's Groundwater: Bulletin 118 - Update 2003, Groundwater Basin Descriptions.* 2003.
- . **2015.** *Consumptive Use Program Plus (CUP+) Model, in California Water Plan Update 2013, Volume 4. Reference Guide, Developed by DWR and UC Davis.* 2015.
- . **2014.** *DWR Atlas - Agricultural Land Use and Irrigated Areas.* [Online] 2014. [gis.water.ca.gov](http://gis.water.ca.gov).

- **1964.** *San Luis Obispo and Santa Barbara Counties Land and Water Use Survey, 1959.* . s.l. : California Department of Water Resources (DWR), 1964.
- **1958.** *San Luis Obispo County Investigation. State Water Resources Board Bulletin No. 18.* . s.l. : California Department of Water Resources (DWR). May., 1958.
- **1997.** *San Luis-Edna Valley Groundwater Basin Study, Draft Report.* . s.l. : California Department of Water Resources (DWR)., 1997.
- **1996.** *South Central Coast Land Use Survey.* 1996.
- **1987.** *Southern Central Coast Land Use Survey, 1985. Morro Bay South 54-30 and San Luis Obispo 54-31 Survey Maps.* 1987.
- **2019.** *Sustainable Groundwater Management Act 2019 Basin Prioritization - Process and Results Document.* 2019.
- **2016.** *Water Budget Best Management Practices for the Sustainable Management of Groundwater.* 2016.
- **2002.** *Water Resources of the Arroyo Grande - Nipomo Mesa Area.* 2002.
- EPA. 2008.** *Water Sense Factsheet - Indoor Water Use in the United States, EPA-832-F-06-004.* 2008.
- ESA Consultants, Inc. 1994.** *Hydrologic Investigation, Edna Valley Well Location Study. September.* 1994.
- Fugro West and Cleath & Associates. 2002.** *Paso Robles Groudwater Study, Final Report.* 2002.
- GSI Water Solutions. 2018.** *San Luis Obispo Valley Basin Characterization and Monitoring Well Installation.* 2018.
- Hall, C.A. 1979.** *Geologic map of the San Luis Obispo – San Simeon Region, California.* s.l. : U.S. Geological Survey, 1979. Map I-1097.
- **1973.** *Geology of the Arroyo Grande Quadrangle, California.* . s.l. : California Division of Mines and Geology, 1973. Map Sheet 24.
- ITRC. 2020.** *Official Cal Poly Precipitation Data, Cal Poly/NOAA Station Rain Gage.* 2020.
- Johnson, A.I. 1967.** *Specific Yield - Compilation of Specific Yield for Various Materials, U.S. Geological Survey Water-Supply Paper 1662-D, prepared in cooperation with the California Department of Water Resources.* 1967.
- National Land Cover Database. Multi-Resolution Land Characteristics Consortium. 2016.** Multi-Resolution Land Characteristics Consortium.
- Rosenberg, L.I. 2001.** *Potential Aquifer Recharge Areas: Monterey County, California.* s.l. : Monterey County Planning Department, 2001.
- San Luis Obispo County Department of Agriculture/Weights and Measures. 2019.** *Crop Surveys for San Luis Obispo Valley Groundwater Basin 2013-2018.* 2019.
- San Luis Obispo County Department of Public Works. 2020.** *Andrews Street Bridge Stream Flow Gage 745.* 2020.
- **2020.** *Gas Company Rain Sensor 3099.* 2020.
- San Luis Obispo County Engineering Department. 1974.** *Hydrologic & Climatological Data, Seasons of 1970-71 & 1971-72.* 1974.
- SLO-FCWCD. 2014.** *CASGEM Monitoring Plan for High and Medium Priority Groundwater Basins in the San Luis Obispo County Flood Control & Water Conservation District. September.* s.l. : San Luis Obispo Flood Control & Water Conservation District, 2014.
- Stillwater Sciences. 2015.** *Percolation Zone Study of Pilot-Study Groundwater Basins in San Luis Obispo County, California. September.* 2015.
- SWRCB. 1990.** *Ernest Righetti & Sons Application 28883, Decision 1627.* 1990.
- TEAM Engineering & Management. 2000.** *Groundwater Yield Analysis. July.* 2000.
- USBR. 1955.** *Reconnaissance Report San Luis Obispo County Basin, California.* . s.l. : U.S. Bureau of Reclamation, Region 2, Sacramento., 1955.
- USDA-NRCS. 2007.** *Soil Survey Geographic Database (SSURGO).* s.l. : U.S. Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS), 2007.
- WSC. 2018.** *Salinas and Whale Rock Reserviors Safe Annual Yield TM.* 2018.





**GROUNDWATER SUSTAINABILITY COMMISSION**  
***for the San Luis Obispo Valley Groundwater Basin***  
**July 8, 2020**

**Agenda Item 8 – Stakeholder Workshop Perceptions Summary: Vision for a Sustainable SLO Basin  
(Presentation Item)**

**Recommendation**

- a) Receive a presentation on the takeaways from Stakeholder Workshop #2: Groundwater Management Vision and provide direction as necessary regarding development of a set of draft “guiding principles” for the SLO Basin GSP.

**Prepared by**

Tiffany Meyer, Water Systems Consulting, Inc.

**Discussion**

The WSC Team led a stakeholder workshop on June 10<sup>th</sup> that engaged more than stakeholders in building a shared vision of what a sustainable SLO Basin means to them. The WSC Team will present the proposed draft “guiding principles” for the SLO Basin GSP developed from that activity, which will be used to inform the next decisions of the GSP development. The proposed draft “guiding principles” are as follows: 1) Groundwater supply supports diverse needs reliably and equitably, 2) Stored groundwater equitably supports supply resilience and evolving needs, 3) Levels support the sustained health of groundwater dependent ecosystems, 4) Cost of maintaining sustainable groundwater levels is equitably distributed, and 5) Groundwater quality is maintained at a safe standard to meet diverse basin needs.

The WSC Team will present the GSC with a summary of Workshop #2 and demonstrate how to provide feedback on the Workshop #2 Summary which will be uploaded to SLOWaterBasin.com and distributed via email to the interested parties list.

**Attachments:**

1. Presentation



# GSC SPECIAL MEETING

For the Development of the SLO Basin  
Groundwater Sustainability Plan (GSP)

**JULY 8, 2020**  
PREPARED BY WATER SYSTEMS CONSULTING



# STAKEHOLDER WORKSHOP SUMMARY

Tiffany Meyer, WSC



**RECAP: WORKSHOP #2 GOALS**


- Share what the project team has learned about the Basin
- Describe the role of the Water Budget
- Document **stakeholder's vision** of what a “sustainable SLO Basin” means.


4 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN

In the **Visioning Exercise**, the stakeholders helped populate a shared virtual white board to answer the question — What is our shared vision of what a “sustainable SLO Basin” means? Stakeholders added ideas, perceptions, outcomes and values across five key categories:

1. Available Supply
2. Available Storage
3. Groundwater Dependent Ecosystem Health
4. Cost to Users
5. Groundwater Quality

Following is a report out of this workshop exercise.

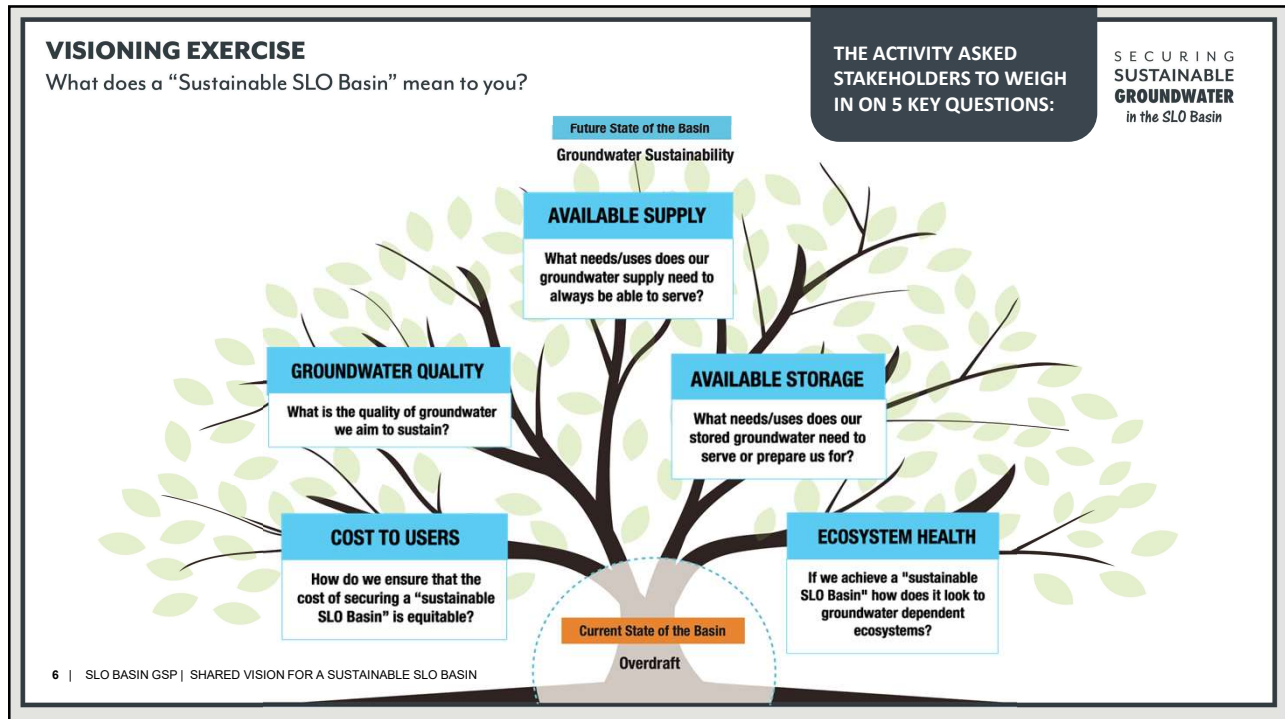

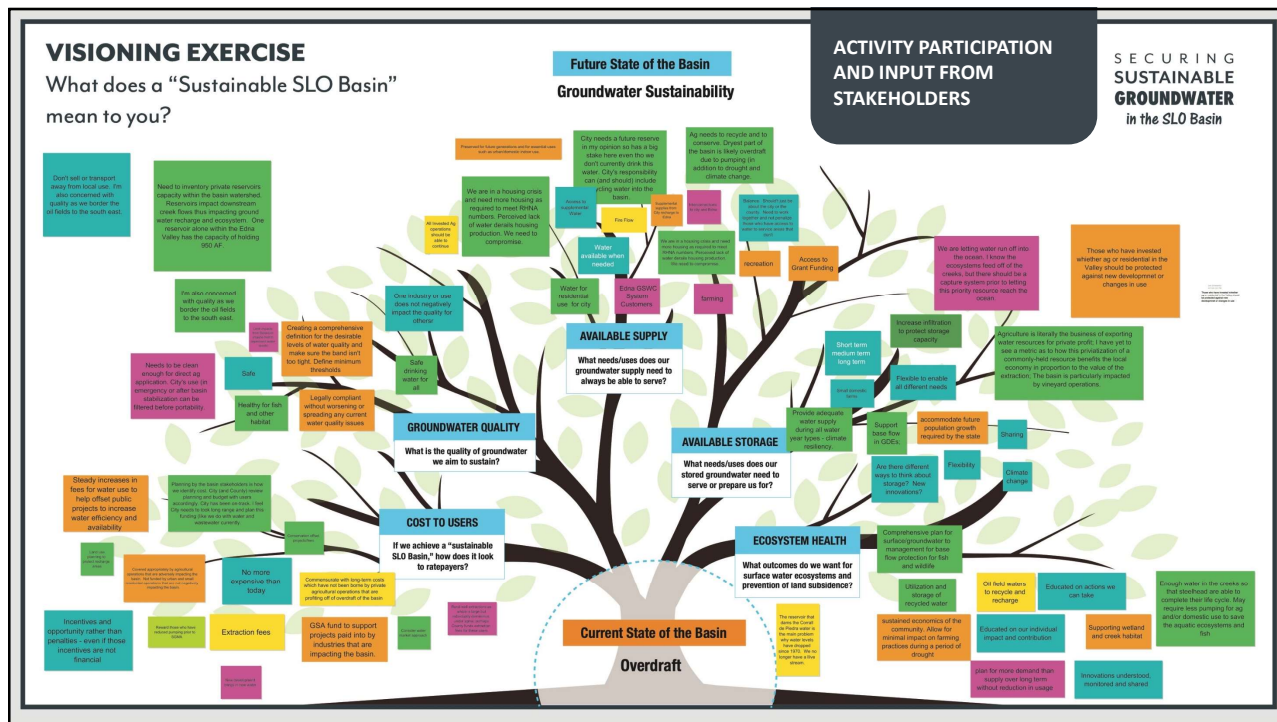

We incorporated the input provided by stakeholders into the proposed draft **5 GUIDING PRINCIPLES INFORMING THE SLO BASIN GSP**, described on the pages that follow.

All ideas and suggestions shared by the stakeholder group members are listed within one or more of these pillars.

These GUIDING PRINCIPLES will be used in partnership with the Groundwater Sustainability Agency to develop an overarching **SUSTAINABILITY GOAL** for the Basin.

8 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN

# THE DRAFT 5 GUIDING PRINCIPLES INFORMING THE SLO BASIN GSP

HOW IT WILL BE USED

1

GROUNDWATER SUPPLY SUPPORTS DIVERSE NEEDS RELIABLY AND EQUITABLY.

2

STORED GROUNDWATER EQUITABLY SUPPORTS **SUPPLY RESILIENCE AND EVOLVING NEEDS.**

3

LEVELS SUPPORT THE **SUSTAINED HEALTH** OF GROUNDWATER DEPENDENT ECOSYSTEMS.

4

COST OF MAINTAINING SUSTAINABLE GROUNDWATER LEVELS IS **EQUITABLY DISTRIBUTED.**

5

GROUNDWATER QUALITY IS MAINTAINED AT A **SAFE STANDARD** TO MEET DIVERSE BASIN NEEDS.


9 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN

## 1 GROUNDWATER SUPPLY SUPPORTS DIVERSE NEEDS **RELIABLY AND EQUITABLY.**

### SUMMARY OF STAKEHOLDER PERCEPTIONS:

- Available when we need it
- Serves range of needs equitably
- Impact of land use or regulatory changes are distributed to groundwater uses/users equitably

10 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN

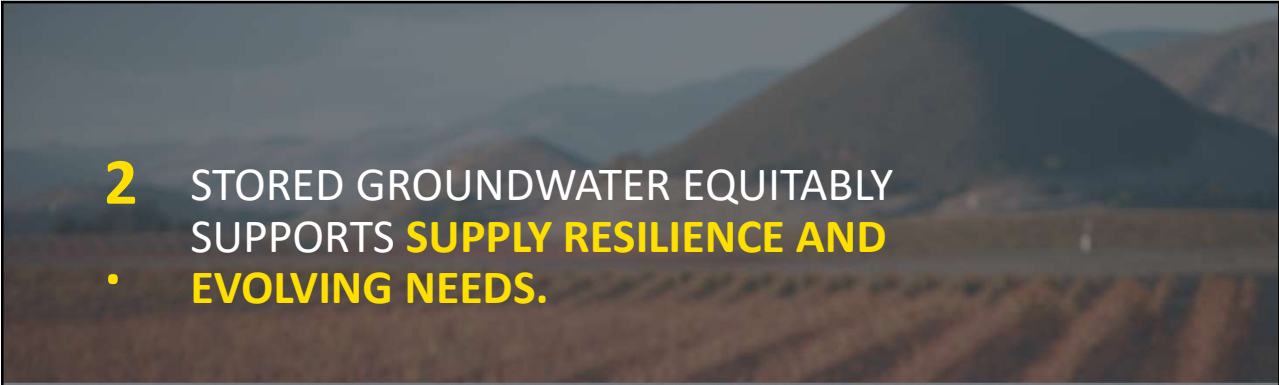


## 2 STORED GROUNDWATER EQUITABLY SUPPORTS **SUPPLY RESILIENCE AND**

- **EVOLVING NEEDS.**

### SUMMARY OF STAKEHOLDER PERCEPTIONS:

- Stored groundwater equitably supports supply resilience
- Stored groundwater equitably supports growth or changes in land use
- Explore storage innovations
- Leverage recycled water for storage goals
- Prioritize recharge via available supplemental supplies

11 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN



## 3. LEVELS SUPPORT THE **SUSTAINED HEALTH** OF GROUNDWATER DEPENDENT ECOSYSTEMS.

### SUMMARY OF STAKEHOLDER PERCEPTIONS:

- GSP projects and management actions equitably prioritize the health of groundwater dependent ecosystems
- Leverage recycled water where possible for groundwater recharge
- Explore storage and recharge innovation
- Groundwater users understand relationship between their use and Basin sustainability

12 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN




## 4. COST OF MAINTAINING SUSTAINABLE GROUNDWATER LEVELS IS **EQUITABLY DISTRIBUTED.**

### SUMMARY OF STAKEHOLDER PERCEPTIONS:

- Highest users pay highest cost
- Explore creative funding mechanisms to equitably share costs long-term
- Build a “future projects” fund
- Integrate an incentives-based reward system for conservation
- Explore water trading opportunities
- Balance biggest use with economic value of use

13 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN



## 5. GROUNDWATER QUALITY IS MAINTAINED AT A **SAFE STANDARD** TO MEET DIVERSE BASIN NEEDS.

### SUMMARY OF STAKEHOLDER PERCEPTIONS:

- Safe for fish, habitat
- Safe for direct agriculture use
- Create agreement on minimum threshold for water quality

14 | SLO BASIN GSP | STAKEHOLDER WORKSHOP SUMMARY — SHARED VISION FOR A SUSTAINABLE SLO BASIN



---

**Share your feedback on this summary by completing the form.**

**1. 5 GUIDING PRINCIPLES: Do the 5 guiding principles listed below capture the highest priority values and outcomes you believe should drive the SLO Basin GSP?**

1. Groundwater supply supports diverse needs reliably and equitably.
2. Stored groundwater equitably supports supply resilience and evolving needs.
3. Levels support the sustained health of groundwater dependent ecosystems.
4. Cost of maintaining sustainable groundwater levels is equitably distributed.
5. Groundwater quality is maintained at a safe standard to meet diverse basin needs.

**2. Are there any additional values, outcomes, or ideas that should inform the SLO Basin GSP? If yes, describe below.**



## SHARED VISION OF A “SUSTAINABLE SLO BASIN”

**GROUNDWATER SUSTAINABILITY COMMISSION**  
***for the San Luis Obispo Valley Groundwater Basin***  
**July 8, 2020**

**Agenda Item 9 – A Preview of What’s Next?**  
**(Presentation Item)**

**Recommendation**

- a) Receive a preview of upcoming SGMA activities

**Prepared by**

Michael Cruikshank, Water Systems Consulting, Inc.  
Tiffany Meyer, Water Systems Consulting, Inc.

**Discussion**

The WSC Team, has been tasked with the preparation of the Groundwater Sustainability Plan (GSP) for the SLO Basin to meet the requirements of SGMA. The WSC Team will present the upcoming SGMA activities related to outreach and future GSP Chapter public review periods. Volume 4 of the Quarterly Newsletter Update of the SLO Basin GSP Development will be released in August 2020 via email and on SLOWaterBasin.com. The Newsletter will provide recent meeting summaries, project milestones, opportunities for public participation, a project timeline, and a table of key terms. The WSC Team will preview the upcoming GSP chapters and associated technical memorandums.

**Attachments:**

- 1. Presentation



# GSC SPECIAL MEETING

For the Development of the SLO Basin  
Groundwater Sustainability Plan (GSP)


**JULY 8, 2020**  
PREPARED BY WATER SYSTEMS CONSULTING



## A PREVIEW OF WHAT'S NEXT

Michael Cruikshank, WSC

# PROJECT TIMELINE

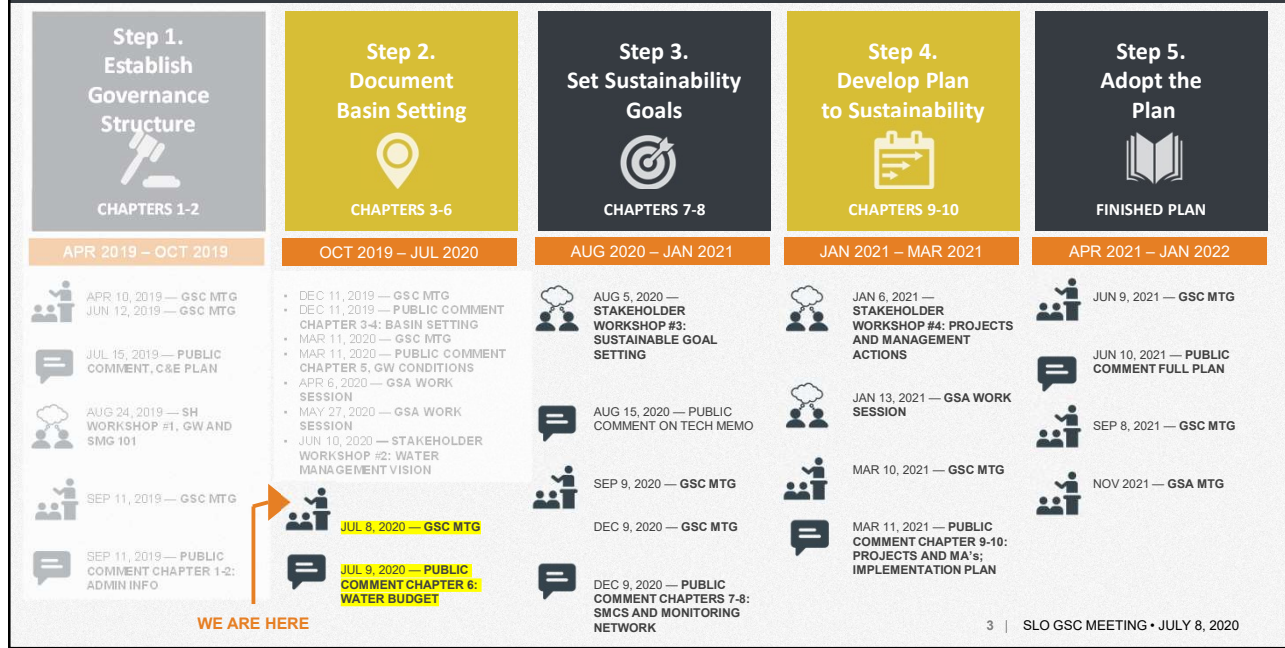

# GSP CHAPTER SCHEDULE

GSP Chapters	2019				2020				2021				2022											
	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M
Executive Summary																								
Chapter 1: Introduction																								
Chapter 2: Agency Information (§ 354.6)																								
Chapter 3: Description of Plan Area (§ 354.8)																								
Chapter 4: Basin Setting (§ 354.14)																								
Chapter 5: Groundwater Conditions (§ 354.16)																								
Chapter 6: Water Budget (§ 354.18)																								
Chapter 7: Sustainable Management Criteria (§ 354.22-30)																								
Chapter 8: Monitoring Networks (§ 354.34)																								
Chapter 9: Projects and Management Actions (§ 354.44)																								
Chapter 10: Implementation Plan																								
Chapter 11: Notice and Communications (§ 354.10)																								
Chapter 12: Interagency Agreements (§ 357.2-4)																								
Chapter 13: Reference List																								
Data Management Plan TM																								
Integrated Model TM																								
Appendices																								
Draft GSP																								
Final GSP																								

## WORKSHOP #3: GETTING TO SUSTAINABILITY

AUGUST 5, 2020 • 3:00pm-5:00pm • Zoom Meeting

### WORKSHOP GOALS

- Build shared buy-in on the Vision for a Sustainable SLO Basin key drivers
- Build shared buy-in on the draft Basin Sustainability Goal
- Initial draft of the Basin representative wells and Sustainable Management Criteria

This input will be used by the project team to **inform** the GSP's sustainability goals and projects and management actions.

### UPCOMING GSP CHAPTERS:

Chapter 7: Sustainable Management Criteria

Chapter 8: Monitoring Networks



Chapters 7 and 8 identify the undesirable results for each of the five sustainability indicators required by SGMA and relevant to the SLO Basin.

### OPPORTUNITIES TO PARTICIPATE

**GSC MEETINGS:** 9/9/2020 & 12/9/2020


**WORKSHOP:** 08/05/2020

**REVIEW AND COMMENT:** Released upon GSC approval at the 12/9/2020 GSC Meeting; comment period is anticipated to close 30 days or more following the GSC meeting.

## REPRESENTATIVE WELLS or MONITORING SITES

- Subset of Basin Monitoring Network
- Will be used to assign MOs and MTs

Do you have groundwater data and would like to include your well in the GSP?

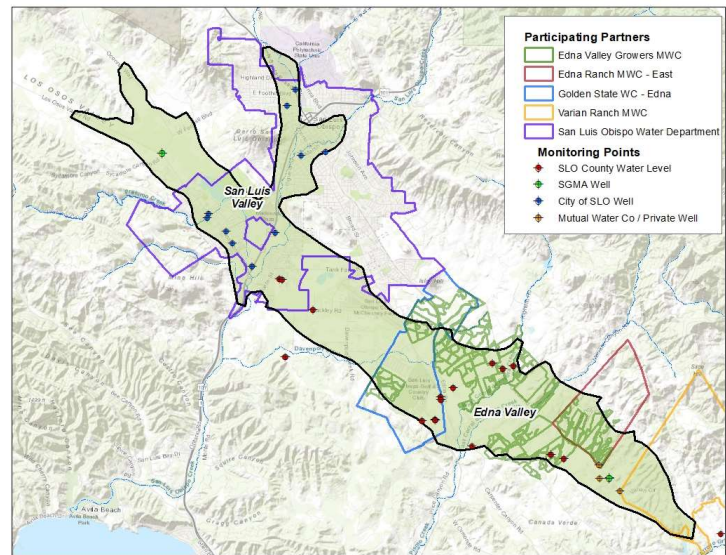

7 | SLO GSC MEETING • JULY 8, 2020

## UPCOMING TECHNICAL MEMORANDUMS: Data Management TM Integrated Model Calibration TM



### OPPORTUNITIES TO PARTICIPATE

**GSC MEETINGS:** 9/9/2020

**REVIEW AND COMMENT:** Released upon GSC approval at the 9/9/2020 GSC Meeting; comment period is anticipated to close 30 days or more following the GSC meeting.

8 | SLO GSC MEETING • JULY 8, 2020

# NEXT QUARTERLY NEWSLETTER • AUGUST 2020

- Meeting Summaries
- Project Milestones
- Opportunities to Participate
- Project Timeline
- Key Terms

**Building a Sustainable Groundwater Future in the SLO Basin**

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**More than 50 in Attendance at August Public Workshop**  
 Workshop Covered SGMA and Groundwater 101

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**Next Step: Set Sustainability Goals**  
 Stakeholders Can Participate at April Workshop

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**Steps to Sustainable Groundwater in the SLO Basin**

**Step 1: Establishing COMMUNITY COOPERATION**  
 COMMUNITY COOPERATION

**Step 2: DOCUMENTING BASIN SETTINGS**  
 DOCUMENTING BASIN SETTINGS

**Step 3: DEVELOPING SUSTAINABILITY GOALS**  
 DEVELOPING SUSTAINABILITY GOALS

**Step 4: DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY**  
 DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY

**Step 5: ADAPTING THE PLAN**  
 ADAPTING THE PLAN

**WE ARE HERE**

SLOWaterBasin.com - GET INVOLVED NOW

**More than 50 in Attendance at August Public Workshop**  
 Workshop Covered SGMA and Groundwater 101

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**Next Step: Set Sustainability Goals**  
 Stakeholders Can Participate at April Workshop

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**Steps to Sustainable Groundwater in the SLO Basin**

**Step 1: Establishing COMMUNITY COOPERATION**  
 COMMUNITY COOPERATION

**Step 2: DOCUMENTING BASIN SETTINGS**  
 DOCUMENTING BASIN SETTINGS

**Step 3: DEVELOPING SUSTAINABILITY GOALS**  
 DEVELOPING SUSTAINABILITY GOALS

**Step 4: DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY**  
 DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY

**Step 5: ADAPTING THE PLAN**  
 ADAPTING THE PLAN

**WE ARE HERE**

SLOWaterBasin.com - GET INVOLVED NOW

**Next Step: Set Sustainability Goals**  
 Stakeholders Can Participate at April Workshop

**In this issue:**  
 MEETING SUMMARIES: HOW TO PARTICIPATE, PROJECT TIMELINE, KEY TERMS

**Why am I receiving this?**  
 You live or work in the SLO Basin. You are affected by groundwater and groundwater sustainability. You are interested in the development of the SLO Basin Groundwater Sustainability Plan (GSP) and the role of the public in the development of the GSP.

**Steps to Sustainable Groundwater in the SLO Basin**

**Step 1: Establishing COMMUNITY COOPERATION**  
 COMMUNITY COOPERATION

**Step 2: DOCUMENTING BASIN SETTINGS**  
 DOCUMENTING BASIN SETTINGS

**Step 3: DEVELOPING SUSTAINABILITY GOALS**  
 DEVELOPING SUSTAINABILITY GOALS

**Step 4: DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY**  
 DEVELOPING PLAN TO ACHIEVE SUSTAINABILITY

**Step 5: ADAPTING THE PLAN**  
 ADAPTING THE PLAN

**WE ARE HERE**

SLOWaterBasin.com - GET INVOLVED NOW